



TRILLIANE - SCHONBEK

5874

A signature Schonbek chandelier, Trilliane blends the grandor of Antiquity with the opulence of an all-crystal masterpiece. Glimmering with inverted pendeloques, it is created using a historically revolutionary technique that evokes the rawness of mineral crystal.

OPTIONS



Spectra Crystal (A), Crystals from Swarovski (S)



-40

MORE TRILLIANE

5796	5797	5798
5799	5846	5847
5848	5849	5851
5852	5853	5854
5855	5856	5858
5867	5868	5869
5870	5871	5872
5873	5875	5876
5886	5888	5877

SPECIFICATIONS


Width/Length:	40in / 102cm
↕ Height:	43in / 109cm
↓ Chain Length:	126in / 320cm
⬇ Hang Weight:	102lbs / 45.9kg
Tier Count:	1
Light Source:	Incandescent Bulb
Bulb Count:	63
Bulb Info:	(62) E12, 60 MAX, B10** (1) E12, 60 MAX, G16-1/2**

*Bulb Included **Bulb Not Included

- SWAROVSKI-LIGHTING.COM/SCHONBEK
- [VIEW](#)
- [CONNECT](#)
- [WHERE TO BUY](#)



CHANDELIER 5874A TRIM DIAGRAM

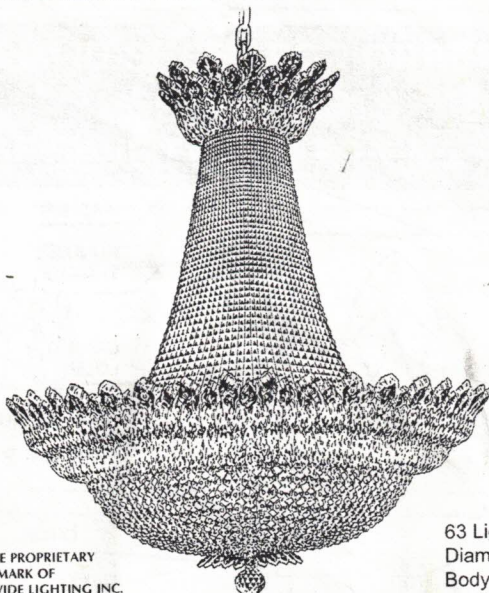

63 Lights
Diameter: 40"
Body Length: 43"

T HIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADEMARK OF
SCHONBEK WORLDWIDE LIGHTING INC.

SCHONBEK®

This fixture was designed and manufactured in Plattsburgh, N.Y. Our high-quality crystal fixtures are made with state-of-the-art manufacturing equipment. If you have any questions about this or any of our more than 450 crystal products, contact your nearest authorized Schonbek distributor.

CAUTION... RISK OF ELECTRICAL SHOCK. Make sure the electrical supply to the chandelier is turned off at the main fuse or circuit breaker before doing any installation. All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

HANGING WEIGHT: 102 pounds.

BULBS: (62) Candle shaped candelabra base C10 bulbs, recommend 25 watts for best appearance.

(1) Globe shaped candelabra base G16-1/2 bulbs, recommend 25 watts for best appearance.

60 - Watts Maximum


WARNING: This chandelier meets UL/CSA requirements. Any tampering will void UL/CSA certification.

Follow steps in exact order
Save this trim diagram for future reference

IMPORTANT


Please record the following information for future service.

CODE	#	_____	Four-digit number on outside of carton.
PACKER	#	_____	See crystal package label.
ORDER	#	_____	See crystal package label.

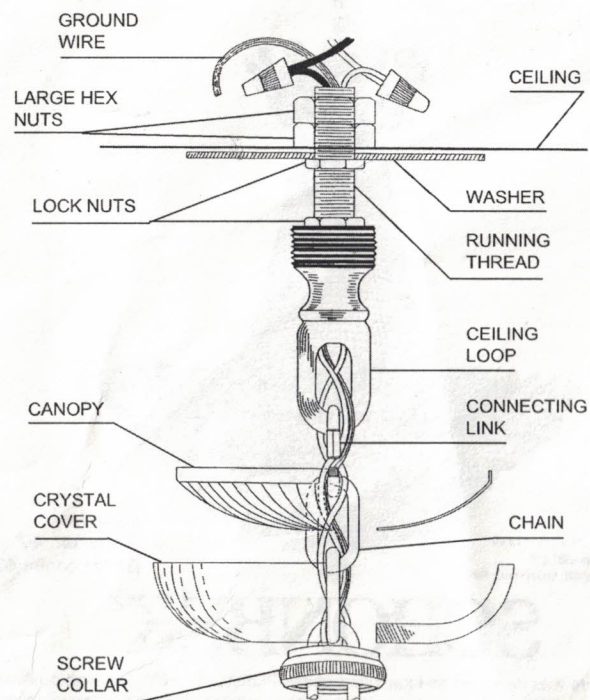


- 1 MAKE SURE POWER IS DISCONNECTED!!**
- 2** Attach washer to supporting member in ceiling sufficient to support weight of fixture.
- 3** Slip screw collar, crystal cover and metal canopy over chain. Determine the suspension length of the fixture and cut chain, if necessary. Use two connecting links to attach chain to chandelier loop and ceiling loop.
- 4** Insert stem wire through chain and ceiling loop. Connect wires. Fixture **MUST** be grounded.
- 5** Check distance from ceiling to loop to assure canopy assembly will be flush against ceiling.
- 6** Attach canopy to ceiling with screw collar.


TRIM ID SHEET FOR ORDERING SPARE PARTS. PLEASE SAVE FOR CLEANING FIXTURE!




B = N779




C = N778




D = N781



H = N728



E = N783

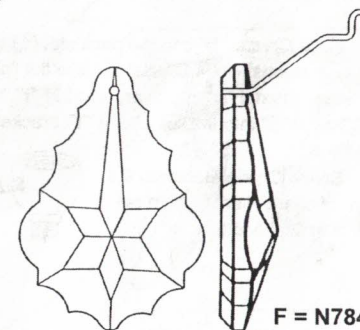

F = N784



7 Hook Crystal Chain "A1" (small crystal at top) into ring #3 pin hole and hook the bottom of the crystal chain into ring #4 leg. See diagram #1 for detailed instructions. Hook Crystal Chain "A2" (small crystal at top) into the ring #3 leg and hook the bottom of the crystal chain into ring #4 pin hole. See diagram #1 for detailed instructions. **NOTE: Crystal Chain "A2" overlaps Crystal Chain "A1".**

8 Hook Crystal "B" into the back slot of the "Y" bracket of ring #2. See diagram #3 for detailed instructions. Hook Crystal "C" into the "plain" bracket of ring #2. See diagram #4 on page 6. Hook small Crystal "D" into every second "Y" bracket of ring #2. **NOTE: Line-up with Ring #1 bracket. Crystal "D" and Crystal "F" line-up with one another.** See diagram #5 on page 6. Hook large Crystal "E" into the remaining "Y" brackets on the ring #2. See diagram #5 on page 6.

9 Hook large Crystal "F" into the leg bracket of ring #1. **NOTE: Crystal "F" should line-up with Crystal "D".**



10 Attach horse shoe bracket with finial into holes in down light. **HINT:** Take out round bulb for easier installation of the horse shoe bracket. Hook Crystal Chain "G" (large crystal at top) into the ring #7. Hook Crystal "H" into the lexan washer on the finial assembly. See diagram #2 for detailed instructions.

11 Hook the bottom of Chains "G" into the lexan washer. Close bottom hook after inserting into washer.


12 Hook Crystal "B" into the back slot (the "Y" is cut off) of ring #6. See diagram #3 for detailed instructions. Hook Crystal "C" into the "plain" bracket of ring #6. See diagram #4 on page 6.

13 Hook Crystal "B" into the back slot of the "Y" bracket of ring #5. See diagram #3 for detailed instructions. Hook Crystal "C" into the "plain" bracket of ring #5. See diagram #4 on page 6. Hook small Crystal "D" into every second "Y" bracket of ring #5. See diagram #5 on page 6. Hook large Crystal "E" into the remaining "Y" brackets of ring #5. See diagram #5 on page 6.

14 Screw Crystal Ball onto the bottom of chandelier. Tighten set screw with supplied tool.

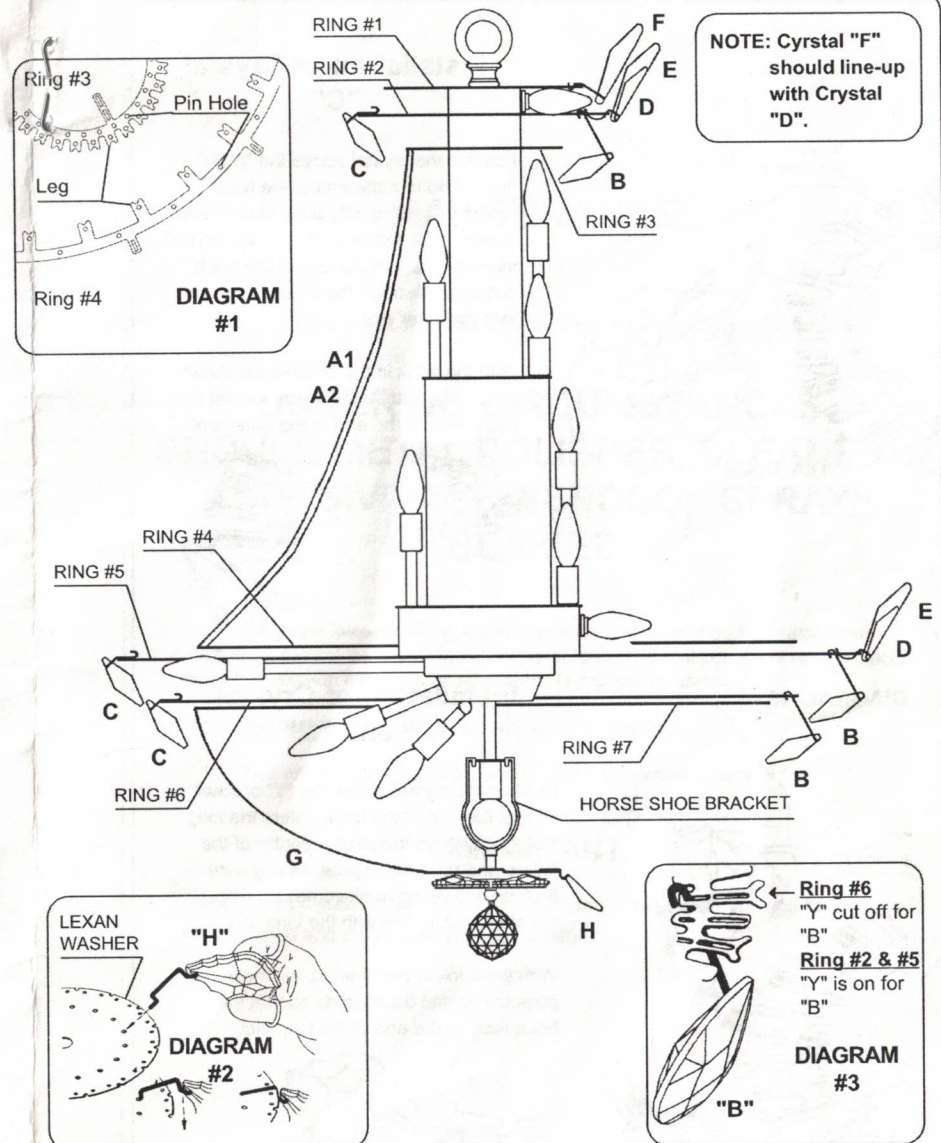

Installation of Crystal "C"

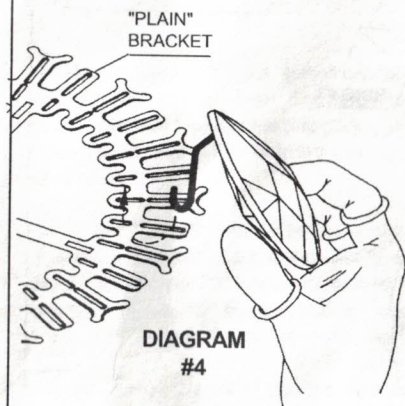

Position the crystal above the "plain" bracket so that the end of the hook enters the slot, gently push toward the center of the fixture and raise the crystal making sure that the end of the hook comes up through the inner slot, in line with the outer slot.

With the hook in the bracket, as shown, pivot the crystal downwards so that the hook rests in the end of the outer slot.


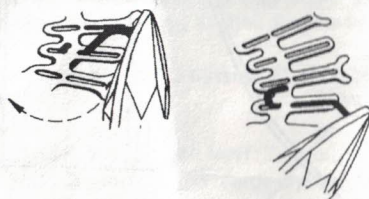


DIAGRAM #5

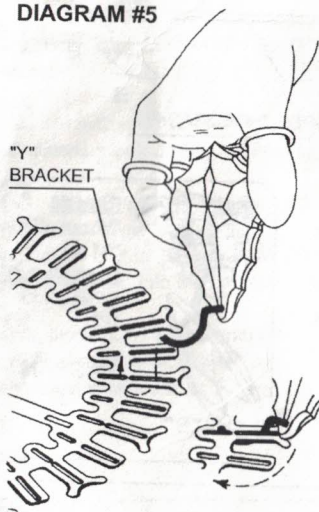

Installation of Crystal "D" and "E"

Position the crystal above the "Y" bracket so that the end of the hook enters the long slot, gently push toward the center of the fixture and raise the crystal making sure that the end of the hook comes up through the short slot, in line with the long slot.

With the hook in the bracket, as shown, pivot the crystal downwards so that the hook rests in the end of the long slot.



MAINTENANCE:

Use a soft, lint - free cloth to clean the metal frame.

**UNDER NO CIRCUMSTANCES
SHOULD METAL POLISHES, CLEANERS,
ABRASIVES OR AEROSOL SPRAYS
BE USED.**

While the latest finishing techniques have been used on the metal frame, such finish cannot be unconditionally guaranteed. The main cause of deterioration, apart from certain atmospheric conditions, is improper cleaning.

To clean the crystals, polish with a damp chamois.

You are cleaning delicate jewelry... Take the greatest care.

IMPORTANT:

Do not clean crystals in a dishwasher. The finish of the metal clips and hangers will be ruined and the crystals may be damaged.

SCHONBEK®

SCHONBEK IS A WORLD LEADER IN CHANDELIER
DESIGN. PATENTS INCLUDE:

#D292,620, #D335,362, #D335,546, #D335,716,
#D335,720, #D336,537, #D338,082, #D389,264,
#D338,278, #D339,879, #D345,815, #D373,441,
#D374,102, #D374,103, #D374,498, #D382,077,
#D393,325, #D397,495, #D397,494, #D403,101,
#D435,686, #D454,973, #D454,974, #D455,224,
#D456,940, #D463,602S, #D463,603S, #D464,769S,
#D468,480, #2,651,806, #5,104,082, #5,109,325,
#5,116,009, #5,144,541, #5,205,644, #5,222,805,
#5,241,460, #5,255,173, #5,258,900, #5,285,364,
#5,404,285, #5,460,269, #5,567,046, #5,567,468,
#5,573,330, #5,577,838, #5,588,744, #5,873,652,
#5,906,430, #5,921,668, #6,241,370B1 & #6,712,490B2