elegant lighting

noir
black ext., brass int., brass accents, black leather, dark stained walnut disc

blanc
white ext. & int., brass accents, tan leather, white washed oak disc

cava
white ext., brushed brass int. brass accents, brown leather, walnut disc

deux
black ext., white int., black accents, brown leather, walnut disc

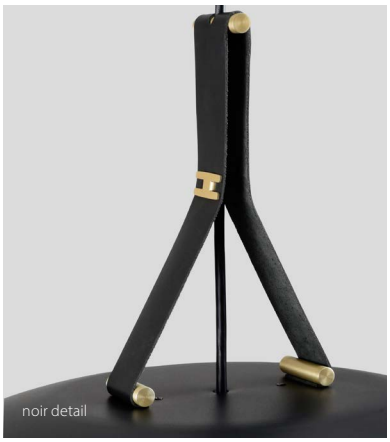

noir detail

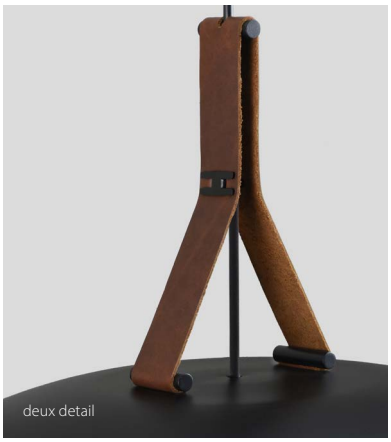

deux detail

Volo pendant

part of the Volo collection

#78400



Dimensions: 24" dia., 14.5"
Product weight: 7 lb
Light source: integrated LED
Light output: 2625 Lumens (source)
Output based on white shade interior
Alternate finishes will reduce lumen output
Light color: 2700 K, 3000 K, 3500 K, or 4000 K
Color accuracy: 90+ CRI
Power usage: 26 W
Driver can be housed inside canopy
Driver dimensions: 3.38" x 1.63" x 1.08"
Dimmable (see driver option)
Wood grain will vary
Specifications subject to change

MATERIAL AND FINISH OPTIONS

Finish Options

noir	**N**
blanc	**B**
cava	**C**
deux	**D**

Lamping

2700 K LED	**27**
3000 K LED	**30**
3500 K LED	**35**
4000 K LED	**40**

Driver Option

AC Input Voltage Range: 120-277 V
120 V input: TRIAC, ELV & 0-10 V dimmable
240 & 277 V input: only 0-10 V dimmable **P1**

The handcrafted Volo pendant is a celebration of natural materials. The solid hardwood, brass finish, leather, and aluminum showcase the purposeful design that went into each detail. The indirect LED light source emits light of beautiful quality.



Volo pendant

SPECIFICATION SHEET

elegant lighting

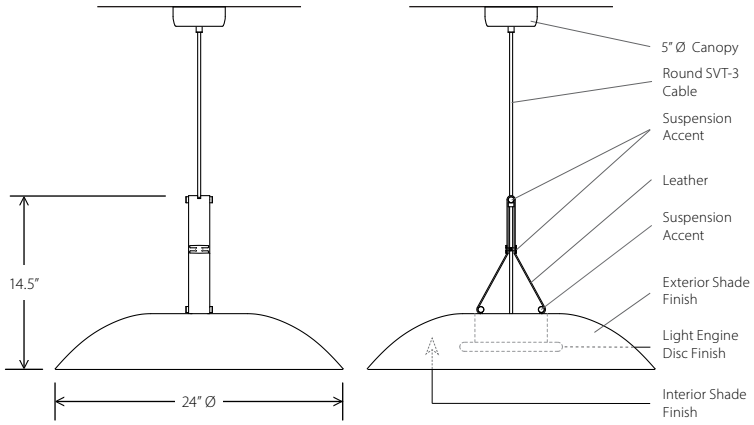

Standard combinations on the previous page are stocked. Fixture specified by using the SKU builder below are subject to increased lead times and minimum order quantities.

Exterior Shade Finish
- textured black powder coat (CM-049) **B**
- textured white powder coat (CM-060) **W**
- brushed brass (CM-120) **R**
- distressed brass (CM-117) **D**

Interior Shade Finish
- textured white powder coat (CM-060) **W**
- brushed brass (CM-120) **R**
- distressed brass (CM-117) **D**

Suspension Accent Finish
- textured black powder coat (CM-049) **B**
- textured white powder coat (CM-060) **W**
- brushed brass (CM-120) **R**

Leather Finish
- brown leather (CM-098) **R**
- black leather (CM-127) **B**
- tan leather (CM-128) **T**

Light Engine Disc Finish
- walnut (CM-001) **W**
- dark stained walnut (CM-002) **D**
- white washed oak (CM-095) **O**

Lamping
- 2700 K LED **27**
- 3000 K LED **30**
- 3500 K LED **35**
- 4000 K LED **40**

Driver Option
- AC Input Voltage Range: 120-277 V
- 120 V input: TRIAC, ELV & 0-10 V dimmable **P1**
- 240 & 277 V input: only 0-10 V dimmable

PHOTOMETRIC POLAR GRAPH

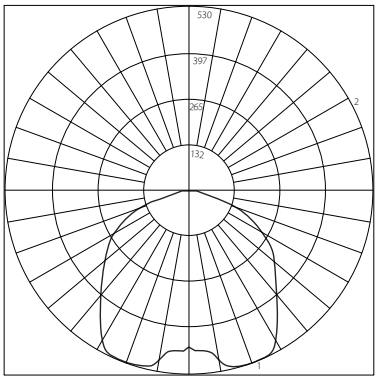

Maximum Candela = 530
Located at
Horizontal Angle = 0,
Vertical Angle = 24

TECHNICAL SPECIFICATIONS

Light source: integrated LED
Light output: 2625 Lumens (source)
Output based on white shade interior
Alternate finishes will reduce lumen output
Light color: 2700 K, 3000 K, 3500 K, or 4000 K
Color accuracy: 90+ CRI
Power usage: 26 W
Driver location: must be housed in J-box
Driver dimensions: 3.38" x 1.63" x 1.08"
Dimmable (see driver option)
Round canopy with SVT-3 Cable
Canopy dimensions*: 5.4" Ø, 2"
* Low profile canopy is available upon request and requires driver to be housed in j-box or remotely
Field adjustable drop length: 0'6" min - 8'0" max
White canopy and cord for fixtures with white shade exterior
Black canopy and cord for all other finishes
Suitable for a sloped ceiling up to 45 degrees
Specifications subject to change

FINISHES

textured black powder coat (CM-049)


brown leather (CM-098)

textured white powder coat (CM-060)

black leather (CM-127)

brushed brass (CM-120)


walnut (CM-001)

distressed brass (CM-117)

dark stained walnut (CM-002)

tan leather (CM-128)

white washed oak (CM-095)