



A collaboration between Lambert & Fils and Guillaume Sasseville, Mile offers a variation on the linear suspension, pared down to its simplest, asymmetrical expression, with two lines floating in surprising equilibrium. Direct and indirect light are separated by a 90° pivot, thus marking out space with light. A play on contrasts, Mile is part art installation and part utilitarian light. The use of linear LED technology and the cords clamped into the structure add to the weightless, almost levitating feel of the lamp.

|                       |  |
|-----------------------|--|
| <b>TYPE</b>           | Suspension   |
| <b>CONSTRUCTION</b>   | Powder coated or polished aluminum body<br>Powder coated or polished steel anchors<br>Powder coated steel canopy<br>Frosted acrylic diffuser<br>Polyester cord   |
| <b>SPECIFICATIONS</b> | source: LED array, integrated<br>Power consumption: 40W<br>Lumen output: LED 2700K - 1395lm<br>LED 3000K - 1436lm<br>Light distribution: 46% Up, 54% Down<br>Colour rendering index: ≥ 90 CRI standard<br>Colour consistency: 3 SDCM<br>Expected lifetime: ≥ 50 000h |
| <b>CONTROL</b>        | 120/277V on/off, 0-10V or phase dimming (120V only)<br>220-240V: On/Off, Phase Dimming, DALI<br>Refer to our recommended list of dimmer models   |
| <b>CORD LENGTH</b>    | Mains/line cord - 120" / 304 cm<br>Non-electrical cord - 96" / 244 cm  |
| <b>WEIGHT</b>         | 3.9 lb / 1.8 kg  |
| <b>CERTIFICATIONS</b> |  |
| <b>WARRANTY</b>       | 2 years  |

# Spec Drawings

## NOTES

- Luminaire total height (ceiling to lowest point of luminaire). (96" / 244 cm wires provided)
  - Min - 6" / 15 cm
  - Max - 98" / 249 cm + variable
 \*For any height outside these parameters, contact Lambert & Fils
- Luminaire height is adjustable on site
- Luminaire can be installed on a slanted ceiling - 45° or less
- Dimensions are approximate and may vary slightly

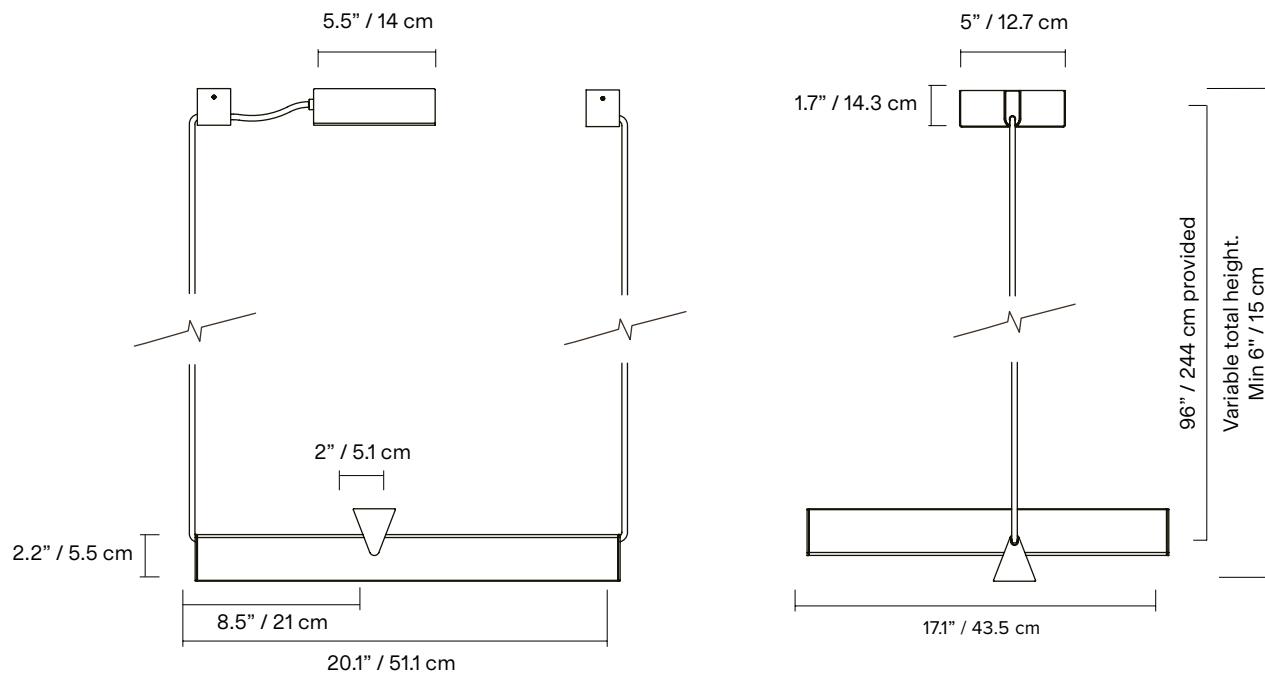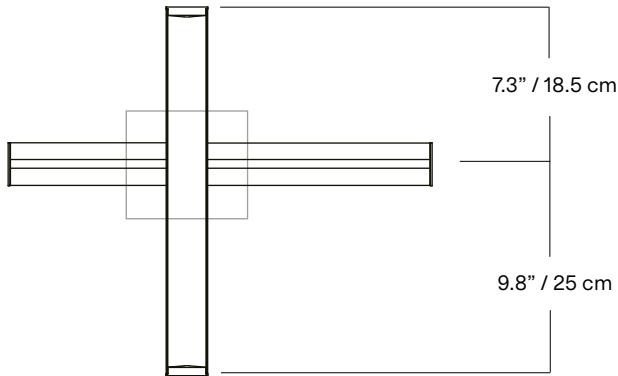

## FINISH



**BK**  
Textured black



**WH**  
Textured white



**BG**  
Textured beige



**GN**  
Textured green



**BU**  
Textured burgundy




**AL**  
Polished aluminum

## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on website for cleaning instructions

## LAMP ANATOMY

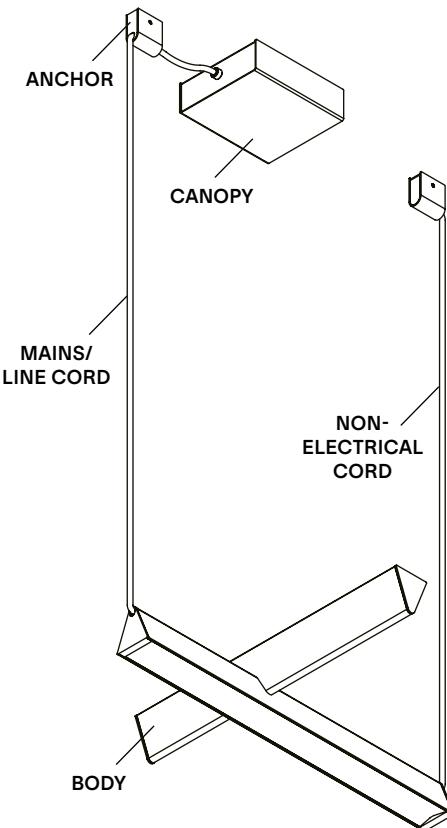

# Order Guide: SKU

|                                  |  | Example          | Fill with your selection |
|----------------------------------|--|------------------|--------------------------|
| COLLECTION                       | MIL<br>Mile  | MIL              | MIL                      |
| MODEL                            | 02LV   | 02LV             | 02LV                     |
| FINISH<br>BODY, CORD AND ANCHORS | AL Polished aluminum<br>BK Textured black<br>BG Textured beige<br>BU Textured burgundy<br>GN Textured green<br>WH Textured white                             | BK               |                          |
| CANOPY                           | BK Textured black<br>BG Textured beige<br>BU Textured burgundy<br>GN Textured green<br>WH Textured white   | BK               |                          |
| COLOUR TEMPERATURE (CCT)         | F22 Fixed 2200K<br>F27 Fixed 2700K<br>F30 Fixed 3000K<br>D27 Dim to warm 2700K-2200K<br>D30 Dim to warm 3000K-2200K<br>CCT Other CCT available upon request* | F22              |                          |
| DIMMING                          | ZT 0-10V dimming (120V only)<br>PH Phase dimming<br>DA DALI (220-240V only)  | ZT               |                          |
| FULL SKU                         |  | MIL02LVBKBKF22ZT |                          |

\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

## NOTES

# Dimmer Specifications

## TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

| DIMMER BRAND | MODEL      | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|--------------|------------|-----------|-----------|------------------|
| LUTRON       | DVELV303P  | 100%      | 9%        | Phase Cut        |
| LUTRON       | MAELV600   | 100%      | 3%        | Phase Cut        |
| LUTRON       | SELV300P   | 100%      | 9%        | Phase Cut        |
| LUTRON       | CTELV-303P | 100%      | 5%        | Phase Cut        |
| LUTRON       | CTRP-253P  | 100%      | 5%        | Phase Cut        |
| LUTRON       | PD-5NE     | 100%      | 7%        | Phase Cut        |
| LUTRON       | DVRP-253P  | 100%      | 5%        | Phase Cut        |
| LUTRON       | MA-PRO     | 100%      | 6%        | Phase Cut        |
| LUTRON       | NTRP-250   | 100%      | 8%        | Phase Cut        |
| LUTRON       | NTELV-300  | 100%      | 9%        | Phase Cut        |

## TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

| DIMMER BRAND | MODEL      | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|--------------|------------|-----------|-----------|------------------|
| BUSCH JAEGER | 6523U      | 100%      | 4.5%      | Phase Cut        |
| CLIPSAL      | 32E450TM   | 100%      | 1.7%      | Phase Cut        |
| CLIPSAL      | 32E450UDM  | 100%      | 2.5%      | Phase Cut        |
| ELKO         | 315GLE     | 100%      | 0.2%      | Phase Cut        |
| ELKO         | 316GLED    | 100%      | 9.1%      | Phase Cut        |
| FINDER       | 15.91.8    | 100%      | 2.9%      | Phase Cut        |
| GIRA         | 117600/I01 | 100%      | 4.4%      | Phase Cut        |
| HAGER        | EVN011     | 100%      | 1.1%      | Phase Cut        |
| HAGER        | EVN012     | 100%      | 1.1%      | Phase Cut        |
| NIKO         | 325        | 100%      | 0.1%      | Phase Cut        |
| SCHNEIDER    | 40 300 RC  | 100%      | 3.1%      | Phase Cut        |

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

\*\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.