



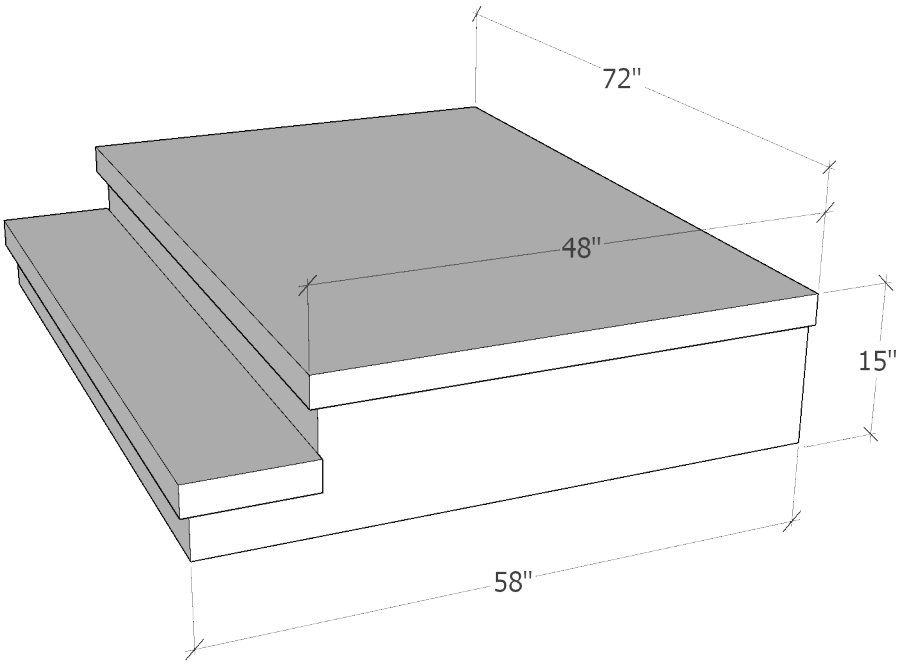


angle irons are attached to
the foundation using
3 3/4" X 3/8" quickbolts

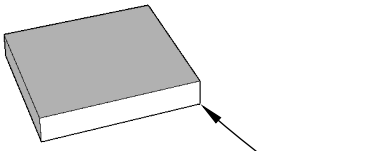

12" x 12" x 2" concrete pads
are used as a base under
the front of the stairs

wrought iron railings
36" high, <4" picket spacing
3" post embedment

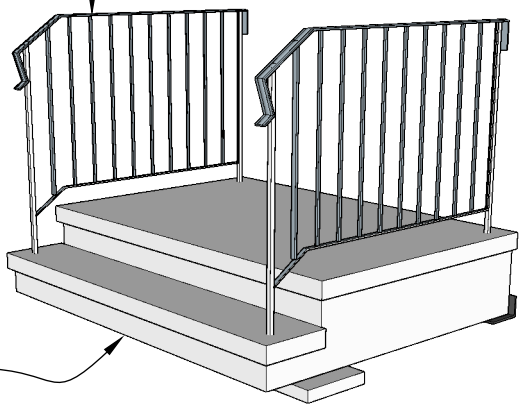

steps installed on
prepared site

MEANS Pre-Cast

6' wide, 2 riser, 48" platform with installation details

151 Adams Street Braintree, Ma 02184 781-843-1909 (fax)781-843-1911 www.meansprecast.com