MEANS Pre-Cast
151 ADAMS ST.
BRAINTREE, MA 02184


PHONE 781-843-1909
(FAX)781-843-1911


WWW.MEANSPRECAST.COM
SALES@MEANSPRECAST.COM


PRODUCT DESCRIPTION:

7 1/2" PRECAST STAIRS

4-10FT WIDE IN 1 FOOT INCREMENTS
1-9 RISERS
MAX 7FT WIDE FOR 7-9 RISERS
PLATFORM LENGTHS 12" - 72"

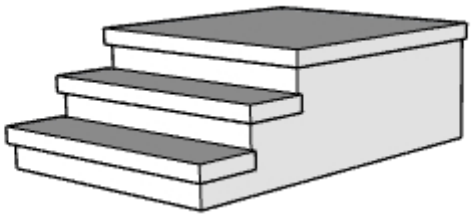




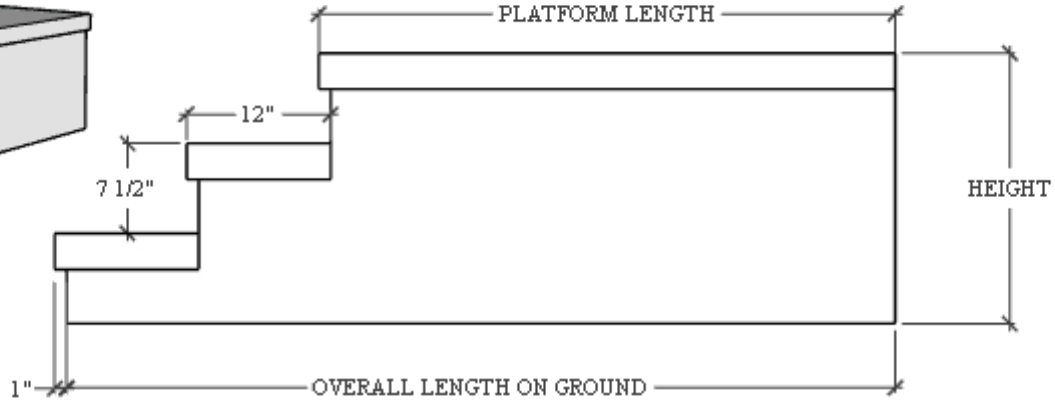

NUMBER OF RISERS

PLATFORM LENGTH	1	2	3	4	5	6	7	8	9
12	11	22	33	44	55	66	77	88	99
48	47	58	69	80	91	102	113	124	135
60	59	70	81	92	103	114	125	136	147
72	71	82	93	104	115	126	137	148	159

OVERALL LENGTH

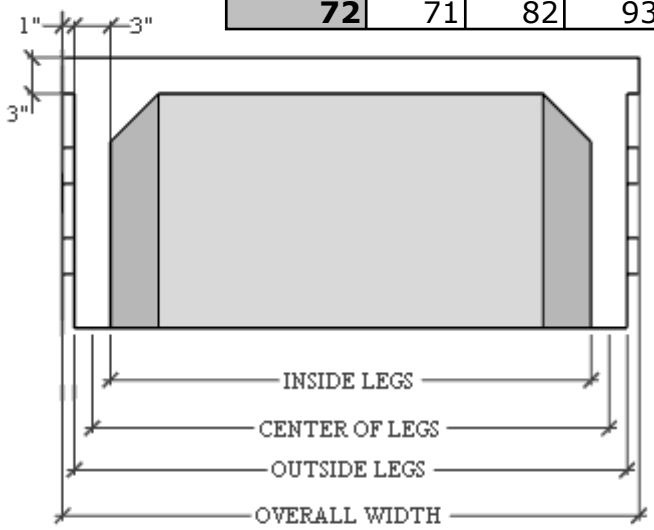

INSTALLING FOOTINGS

FOR WIDTH, USE CENTER OF LEGS FOR CENTER OF FOOTINGS

FOR DISTANCE FROM FOUNDATION. FOOTINGS SHOULD BE SET BACK ONE TREAD.

DEDUCT 11" FROM OVERALL LENGTH FOR THE FORWARD LIMIT OF THE FOOTING

RISERS	HEIGHT
1	7.5
2	15
3	22.5
4	30
5	37.5
6	45
7	52.5
8	60
9	67.5

OVERALL WIDTH	OUTSIDE OF LEGS	CENTER OF LEGS	INSIDE OF LEGS
4'	46	43	40
5'	58	55	52
6'	70	67	64
7'	82	79	76
8'	94	91	88
9'	106	103	100
10'	118	115	112

PREPARED FOR:	**APPROVED BY:**	**DATE:** 8.30.2026
WEIGHT:	**DRAWN BY:** R.RICCIARDI	**REV:** 1
CONCRETE VOLUME:	**PRODUCT NO:**	**PAGE:** 1 OF 1