



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Stacked

FEATURES


- Driver concealed within the canopy
- Silicon diffusers for even illumination
- Rotatable arms and articulating lights adjust 360-degrees for customization
- Slope ceiling adaptable. Hang straight swivels up to 90 degrees
- Three 12" and one 6" down rods included (additional sold separately)

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV, 0-10V
Color Temp	3000K
CRI	90
Construction	Aluminum and Silicon Diffuser

REPLACEMENT PARTS

RPL-ROD-IN06-AL - 6" Rod - AL finish
 RPL-ROD-IN06-BK - 6" Rod - BK finish
 RPL-ROD-IN06-BR - 6" Rod - BR finish
 RPL-ROD-IN12-AL - 12" Rod - AL finish
 RPL-ROD-IN12-BK - 12" Rod - BK finish
 RPL-ROD-IN12-BR - 12" Rod - BR finish

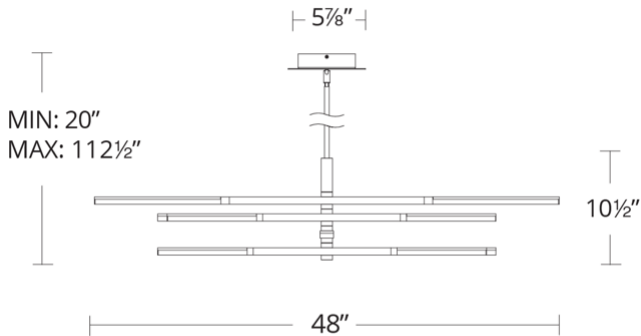

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
48"	3000K	AL Brushed Aluminum	41.6W	4047	2102
	3000K	BK Black	41.6W	4047	2102
	3000K	BR Brushed Brass	41.6W	4047	2102

lighting
elegance