

K-HELLO HEAD



PRODUCT FEATURES

- High-tech display head that combines simplicity with practical technology
- Highly adjustable head tilts between the Kable Lite system for a 140 degree head rotation
- Ideal for commercial and residential lighting applications
- Fully dimmable to create the desired ambiance in your special space
- 5 year warranty with LED lamping



LAMPING

Integral louver lens holder can hold glass lens (sold separately) or eggcrate louver (included). Satin aluminum finish. Rated for (1) 75 watt max. halogen MR16 lamp (not included). Dimmable with low-voltage electronic or magnetic dimmers. (based on transformer).

K-Hello Head



K-Hello Head

ORDERING INFORMATION

700KHELLO CABLE SEPARATION	FINISH
3 3.50000	SATIN ALUMINUM
5 5.50000	

700KHELLO

JOB NAME


NOTES

K-HELLO HEAD



SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	
NET WEIGHT	0.3 lbs
HEIGHT	2.3in
WIDTH	3.5in
LENGTH	
BEAM SPREAD	
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
MIN. HANGING HEIGHT	
MAX HANGING HEIGHT	
TOTAL CORD LENGTH	
SLOPED CEILING ADAPTABLE?	
GENERAL LISTING	
INCLUDES	

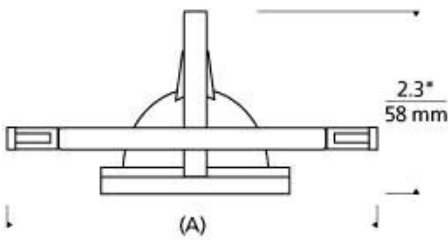

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS			50	
MAX WATTAGE PER BULB			50W	
INPUT VOLTAGE			12V	
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?			Y	
WARRANTY**				

* Dimming information available at www.techlighting.com/Downloads#dimming
** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

