
SILO X10 - model: 2010

Monopoint Luminaire



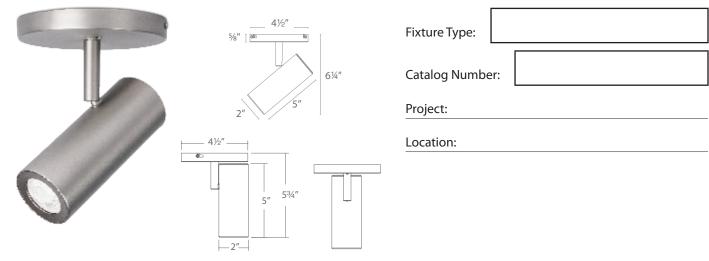

PRODUCT DESCRIPTION

Silo offers superior light output in a small, sleek design. Engineered synthesis of driver, single point source LED, optical and thermal management in a slender diecast housing. Ideal for residential, retail and lower mounting height commercial applications.

FEATURES SPECIFICATIONS

- 35° narrow flood optic installed. 25° spot optic included
- Ceiling and wall mountable
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- Accommodates one at lens accessory or one glare control accessory
- 350° horizontal and 90° vertical aiming
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

Construction: Die-cast aluminum with removable front cap for lenses or

accessories

Input: 120-277V AC 50/60Hz

Power: 10W

Light Source: High output COB LED

Dimming: 100%-5% electronic low voltage (ELV) dimmer (120V only)

Finish: Powder coated Black and White Anodized Brushed Nickel

Standards: UL & cUL Damp Location listed

ORDER NUMBER

 Beam	Lumens	CBCP	Color T	emp	CRI	Finish	l
25° 35°	790 790	2575 1545	930	3000K	90	BN BK WT	Brushed Nickel Black White

Accommodates one lens accessory or one glare control accessory

LENS ACCESSORIES

Amber		LENS-11-AMB
Blue		LENS-11-BLU
Green		LENS-11-GRN
Red		LENS-11-RED
Frosted	1	LENS-11-FR
Spread		LENS-11-SPR
Beam E	longating	LENS-11-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-11P-CRL	BN
Snoot	LENS-11-SNOOT	BK WT

EXTENSIONS Custom order as a complete unit. Ceiling mount only.

X6 6" X12 12" X18 18" X24 24" X36 36" X48 48"	2" 8" 4" 6" MO2010930	BN Extension BK WT 5½"
--	--------------------------------	------------------------