



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Maglev

PRODUCT DESCRIPTION


An ultra-functional balanced sconce. This LED wall luminaire employs an etched glass diffuser that delivers interest-generating bidirectional illumination.

FEATURES

- ACLED driverless technology
- Up and down illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant, ADA
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 3500K, 4000K
CRI	90
Construction	Extruded aluminum body with etched glass diffuser

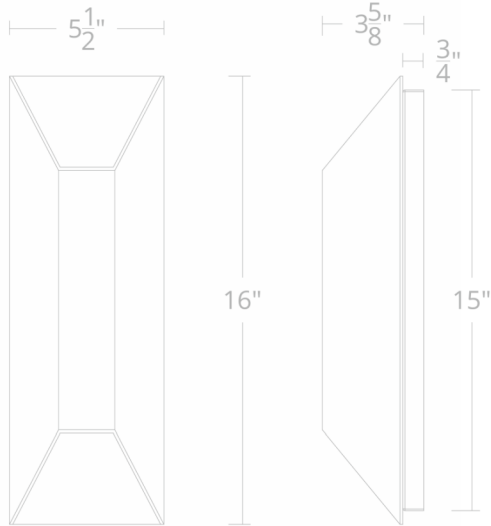

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
○ 16"	○ 3000K	○ AL Brushed Aluminum	25.4W	1000	802
	○ 3000K	○ BK Black	25.4W	1000	802
	○ 3000K	○ BZ Bronze	25.4W	1000	802
	○ 3000K	○ WT White	25.4W	1000	802
	○ 3500K	○ AL Brushed Aluminum	25.4W	1000	866
	○ 3500K	○ BK Black	25.4W	1000	866
	○ 3500K	○ BZ Bronze	25.4W	1000	866
	○ 3500K	○ WT White	25.4W	1000	866
	○ 4000K	○ AL Brushed Aluminum	25.4W	1000	836
	○ 4000K	○ BK Black	25.4W	1000	836
	○ 4000K	○ BZ Bronze	25.4W	1000	836
	○ 4000K	○ WT White	25.4W	1000	836