WAC LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

5" Round

Ceiling and Wall Mount

Model & Size	*Color Temp & CRI*	*Watt*	*Lumens*	*Finish*
❍ FM-05RN 5"	❍ 930 3000K - 90 ❍ 935 3500K - 90	12W 12W	1050 1050	❍ BZ Bronze ❍ NI Nickel ❍ WT White

Example: **FM-05RN-930-BZ**

DESCRIPTION

Ultra-slim flush mount that uses edge-lit technology and a translucent diffuser for uniform illumination without shadows or hotspots.

FEATURES

- Multiple LED array for uniform illumination
- Suitable for outdoor and coastal regions
- Dead front trim for shower applications
- Driver installed within the Junction Box, driver dimension: 2.25" Dia x 1" Deep
- 5 year warranty

SPECIFICATIONS

Construction:	Injection molded UV rated plastic with translucent diffuser for outdoor application
Power:	12W
Input:	120-277 VAC, 50/60Hz
Dimming:	TRIAC: 100-5%, ELV: 100-5%
Light Source:	Integrated LED
Lens:	Translucent acrylic diffuser
Mounting:	Installs over a 3", 4" or 3/0-4/0 hybrid junction box, Can be mounted on ceiling or wall in all orientations
Finish:	Enamel Coated White, Enamel Coated Nickel, Enamel Coated Bronze
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2016 Compliant, ADA

FINISHES

Bronze Nickel White

LINE DRAWING

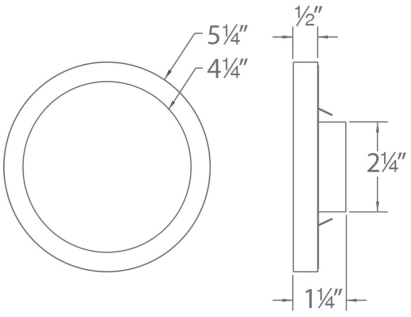

FM-05RN

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2020

Proudly assembled in America