

## 7"/11"/15" Round

Ceiling and Wall Mount

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
○	○ 930 3000K - 90	15W	1100	○ BK Black
○	○ 935 3500K - 90	15W	1100	○ BN Brushed Nickel
○	○ 930 3000K - 90	20W	1525	○ BZ Bronze
○	○ 935 3500K - 90	20W	1525	○ WT White
○	○ 930 3000K - 90	28W	2550	
○	○ 935 3500K - 90	28W	2550	

### DESCRIPTION

Ultra-slim flush mount that uses edge-lit technology and a translucent diffuser for uniform illumination without shadows or hotspots.

### FEATURES


- Multiple LED array for uniform illumination
- Driver installed within the Junction Box, driver dimension: 2.25" dia x 1" deep
- 5 year warranty

### SPECIFICATIONS

Construction:	Aluminum with translucent diffuser
Power:	15W, 20W, 28W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Translucent acrylic diffuser
Rated Life:	50000 Hours
Mounting:	Installs over a 3", 4" or 3/0-4/0 hybrid junction box, Can be mounted on ceiling or wall in all orientations
Finish:	Electroplated:Brushed Nickel, Electroplated::White, Electroplated:::Bronze, Electroplated:::Black, Electroplated:::Black, Electroplated:::White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, ADA



### FINISHES:

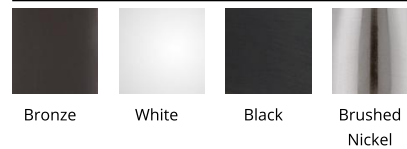

### LINE DRAWING:

