



Specification grade HID floodlight with cutting edge design, architectural quality, superior features and mounting options at competitive prices.

Color: White

Weight: 17.0 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Lamp Info

Type	ED17
Watts	100W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	15,000
Lamp Lumens	9,000
Efficacy	69.8 lm/W

## Ballast Info

Type	HX-HPF QT
120V	1.2/1.2A
208V	.7/.7A
240V	.7/.8A
277V	.6/.5A
Input Watts	129W

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Suitable for ground mounting.

#### EISA 2007 Compliant:

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

### Construction

#### Housing:

Precision die-cast aluminum. 1/2" NPS locking Swivel Arm, Wall Bracket Trunnion or Slip Fitter.

#### Reflector:

Anodized aluminum. Field adjustable beam spread. Rotates 90° for horizontal or vertical lamp position.

#### Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security.

### Finish:

Formulated for high durability and long-lasting color

### Lens:

Thermal tempered shock resistant glass, 3/16" thick

### Lens Gasket:

High-temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

### Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation

### EPA:

Maximum EPA 1.1

### Electrical

#### Socket:

HID Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL Plug in type, GX24q-4 base

#### Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

### Other


#### Patents:

Pat. D545,472

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

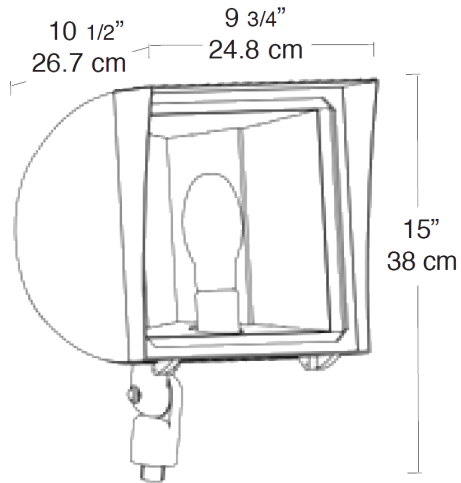

## Features

- Integra hood glare shield for friendly lighting when properly aimed
- Silicone gasket for durable weatherproofing & easy relamping
- Precision die cast aluminum housing and lens frame with durable polyester powder coating
- Anodized aluminum reflector rotates for horizontal or vertical lamp position
- Medium base 4kv pulse rated socket
- Two field adjustable socket positions allow fine tuning of beam spread)
- Fins for heat dissipation extend lamp and ballast life