



PATH LIGHTS PL-03-DC SERIES

PL-03-DCBAR
as displayed

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or brass 5.25" Shell Hat; matching extruded stanchion

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 3w 50,000 hours average rating OMNI-3 LED (-LED3) or OMNI-3 Super Saver (-LED3SS) 10,000 hours average rating 20w Xenon (-X) or 20w Halogen (-H)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200°C silicone lead wires.

No socket for LEDP models

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)


For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v Standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only

MOUNTING: FA-03 black 9" ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available




PL-03-DCRBV

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-03-DCBLT	Cast Aluminum 5.25" Sea Shell Hat	18w S8 #1141	2.0 lbs.
PL-03-DCBRS	Cast Brass 5.25" Sea Shell Hat	18w S8 #1141	2.0 lbs.



MOUNTING ACCESSORIES

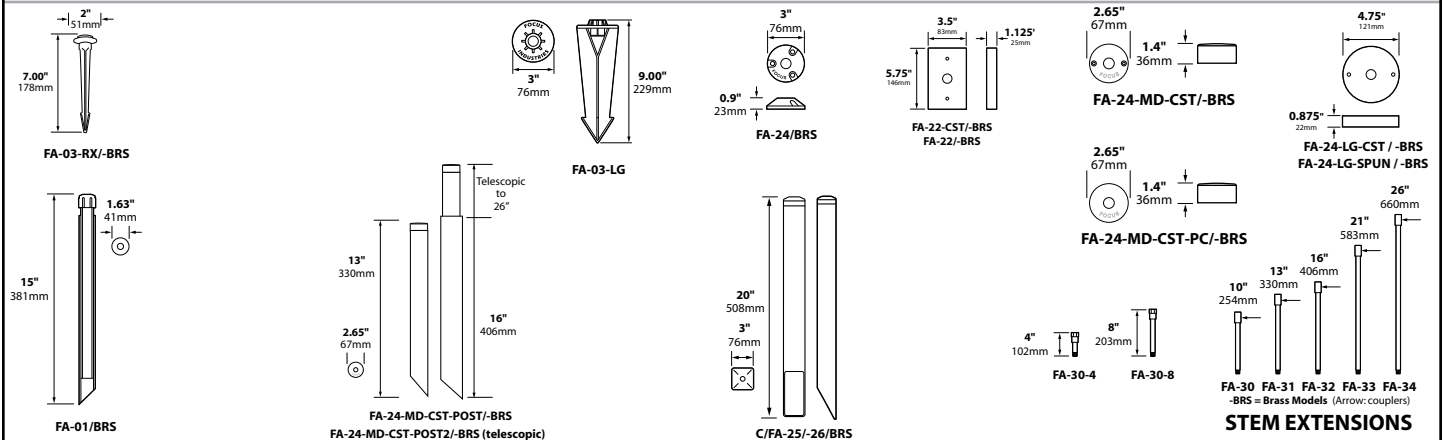

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



PL-03

Half Spread Photometrics
10 ft. (3.0m) diameter

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT