
RL4 Dimensions

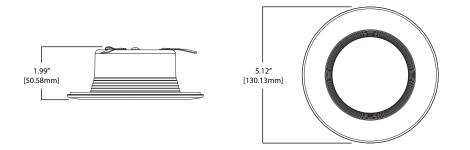

Energy Data

RL4 Series (Values at non-dimming line voltage)

Minimum Starting Temp: -30°C (-22°F) EMI/RFI: FCC Title 47 CFR, Part 15, Class B (Consumer)

Input Voltage: 120V Power Factor: >0.90

Sound Rating: Class A

Input Frequency: 50/60Hz

THD: <20%

Input Power: 7.3W - 10.0W (per CRI and CCT)

Input Current: 0.075A - 0.0875A (per input power)


Maximum IC (Insulated Ceiling) Ambient Continuous


Operating Temperature: 25°C (77°F)

Maximum Non-IC Ambient Continuous Operating

Temperature 40°C (104°F)

Designer Trim Dimensions



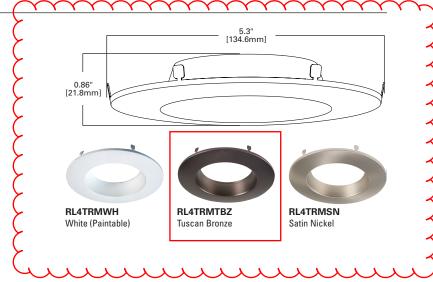

Ordering Information

Sample Number: RL460WH927PK

Complete unit includes RL4 LED and Halo H995 series LED housing, or compatible 4" E26 screw based housing, ordered separately. Optional accessory designer trim ring ordered separately. RL4 LED and housing to be ordered separately.

RL46 Models

80 CRI

RL460WH827PK= 4" Retrofit Baffle - Trim LED Module, 80 CRI, 2700K, Matte White RL460WH830PK= 4" Retrofit Baffle - Trim LED Module, 80 CRI, 3000K, Matte White

RL460WH835PK= 4" Retrofit Baffle - Trim LED Module, 80 CRI, 3500K, Matte White

RL460WH840PK= 4" Retrofit Baffle - Trim LED Module, 80 CRI, 4000K, Matte White

90 CRI

RL460WH927PK= 4" Retrofit Baffle - Trim LED Module, 90 CRI, 2700K, Matte White RL460WH930PK= 4" Retrofit Baffle - Trim LED Module, 90 CRI, 3000K, Matte White RL460WH935PK= 4" Retrofit Baffle - Trim LED Module, 90 CRI, 3500K, Matte White RL460WH940PK= 4" Retrofit Baffle - Trim LED Module, 90 CRI, 4000K, Matte White RL460WH950PK= 4" Retrofit Baffle - Trim LED Module, 90 CRI, 5000K, Matte White

Accessories (Order Separately)

RL4TRMSNB= 4" Satin Nickel Trim Ring, Baffle

RL4TRMTBZB= 4" Tuscan Bronze Trim Ring, Baffle

RL4TRMWHB= 4" White Paintable Trim Ring, Baffle

RL4TRMSN= 4" Satin Nickel Trim Ring RL4TRMTBZ= 4" Tuscan Bronze Trim Ring

RL4TRMWH= 4" White Paintable Trim Ring

HE26LED=Replacement screw base adapter (one included with unit)



