



# MARKER LIGHT SL-20-SMM SERIES

**SL-20-SMM-MR16-BRS**  
as displayed

## SPECIFICATIONS

### CONSTRUCTION:

BODY: Fiberglass reinforced bronze composite with molded brass inserts for screws

**MARKER DOME:** Cast aluminum or **cast brass:**

Overall cover height is 1.25", it is .875" from top of screw ledge

**LENS:** High impact clear tempered convex glass

**O-RING:** High temperature red silicone

**REFLECTOR:** Highly polished specular aluminum

**12v LAMP SUPPLIED:** 20w **MR16** FL(BAB) 5000 hours average rating (50w max)

**12v LED OPTIONS:** We recommend 3w, 5w or 7w Arrow Super Saver 12v MR16 LED, 40,000 hours

**12v SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

**12v WIRING:** Black 4 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**120v LAMP SUPPLIED:** None, use only outdoor rated PAR20 lamps

**120v LED OPTIONS:** We recommend 8w ARROW Super Saver LED PAR20 50,000 hours average rating or 3w, 5w or 7w Arrow Super Saver 120v MR16 LED, 40,000 hours

**120v SOCKET:** High temperature ceramic medium base with 250°C silicone lead wires

**120v WIRING:** Standard 120v Black, White and Ground 9" lead wires

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable  
(12/2, 10/2 or 8/2 only) 12v only


**FINISH:** Aluminum - Black texture polyester powder coat. Optional finishes available

**Brass - Unfinished brass.** Optional finishes available

**VEHICULAR PRESSURE RATING:** 8800 lbs




SL-20-SMMMR16-CPR



TOP VIEW


## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP SUPPLIED	SHIP WEIGHT
SL-20-SMMMR16-BLT	Well Light, Aluminum Marker	20w MR16 FL(BAB)	2.0 lbs.
SL-20-SMMMR16-BRS	Well Light, Brass Marker	20w MR16 FL(BAB)	3.0 lbs.
SL-20-SMMNL120V-BLT	Well Light, Aluminum Marker	None	2.0 lbs.
SL-20-SMMNL120V-BRS	Well Light, Brass Marker	None	3.0 lbs.



**BOTTOM**  
2 Female 1/2" NPS threaded  
ports available upon request

## LIGHT DISTRIBUTION

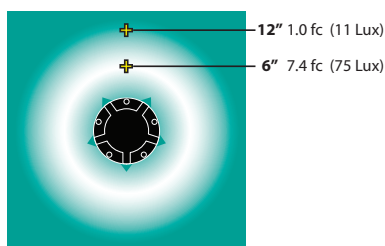

SL-20-SMM  
Light Distribution

## ACCESSORIES

CATALOG NO.	DESCRIPTION
FA-08-06	Round 1/4" Mini Hex Cell Louver
FA-10-SL20SMAMBER	Flat Amber Tempered Glass Lens
FA-10-SL20SMBLUE	Flat Blue Tempered Glass Lens
FA-10-SL20SMGREEN	Flat Green Tempered Glass Lens
FA-10-SL20SMRED	Flat Red Tempered Glass Lens
FA-FORM-SL20SM	Concrete form for SL-20-SM Series

IP65

CE



## JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.  
25301 COMMERCENTRE DRIVE  
LAKE FOREST, CA 92630

www.focusindustries.com  
sales@focusindustries.com  
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT