

FIN - model: WP-LED1

Endurance Wallpack

elegant
lighting

WAC LIGHTING
Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

SPECIFICATIONS

Construction: Die-cast aluminum

Power: Integral driver in luminaire. Universal voltage input (120V-277V)

Dimming: 100% - 30% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)


Finish: Architectural Bronze, Graphite, and White

Standards: IP66, Wet Location, ETL & cETL Listed

Total Harmonic Distortion: 35%

Operating Temperature: -40°C (-40°F) to 40°C (104°F)

PHOTOMETRY

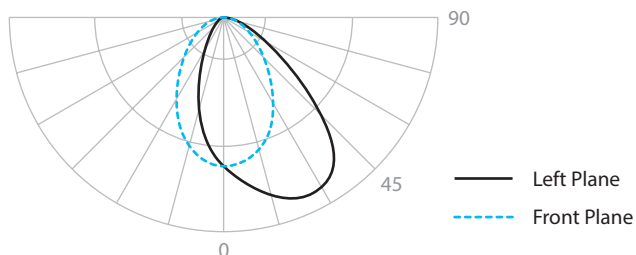

PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES



- Factory-Sealed LED Light Engine
- 20° Forward Throw Illumination
- Photo/Motion Sensor Compatible (Sold Separately)
- Built-in Level For Easy Adjustment
- Suitable to install in all directions
- Multi-Function Dimming: ELV (120V) or 0-10V
- 85 CRI
- 100,000 hour rated life

ORDER NUMBER

		Power	Comparable	Color Temp	Delivered Lumens	CBCP	Finish
	WP-LED119	19W	39W HID	30 3000K 50 5000K	1390 1460	1030 1048	aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White
	WP-LED127	27W	70W HID	30 3000K 50 5000K	2075 2135	1461 1467	
	WP-LED135	35W	100W HID	30 3000K 50 5000K	2750 2825	1930 1921	

Example: WP-LED119-50-BZ

ACCESSORIES



WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585