

Rubix

Single & Double Wall Mount 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
	<input type="radio"/> 3000K 90 <input type="radio"/> 3000K 90	16W 31W	945 1890	<input type="radio"/> AL Brushed Aluminum <input type="radio"/> BK Black <input type="radio"/> BZ Bronze <input type="radio"/> GH Graphite <input type="radio"/> WT White

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

DESCRIPTION

Available in single and twin light configurations, this die-cast aluminum LED wall luminaire is Wet Location listed for a broad range of exterior lighting applications. Designed with asquare profile, this version of Rubix mounts upwards or downwards.

FEATURES


- 2504 Single, 2505 Double
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	16W, 31W
Input:	120-277V, 50/60Hz
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on wall in all orientations
Finish:	Powder Coat Bronze:Bronze, Powder Coat Bronze::Black, Powder Coat Bronze::Brushed Aluminum, Powder Coat Bronze::White, Powder Coat Bronze::Graphite, Powder Coat White:White, Powder Coat White::Graphite, Powder Coat White::Bronze, Powder Coat White::Black, Powder Coat White::Brushed Aluminum
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



FINISHES:

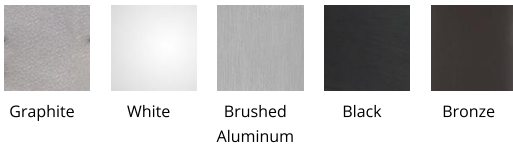

LINE DRAWING:

