


GARAGE DOORS

COMMERCIAL PRODUCT GUIDE

QUALITY
VALUE
SERVICE

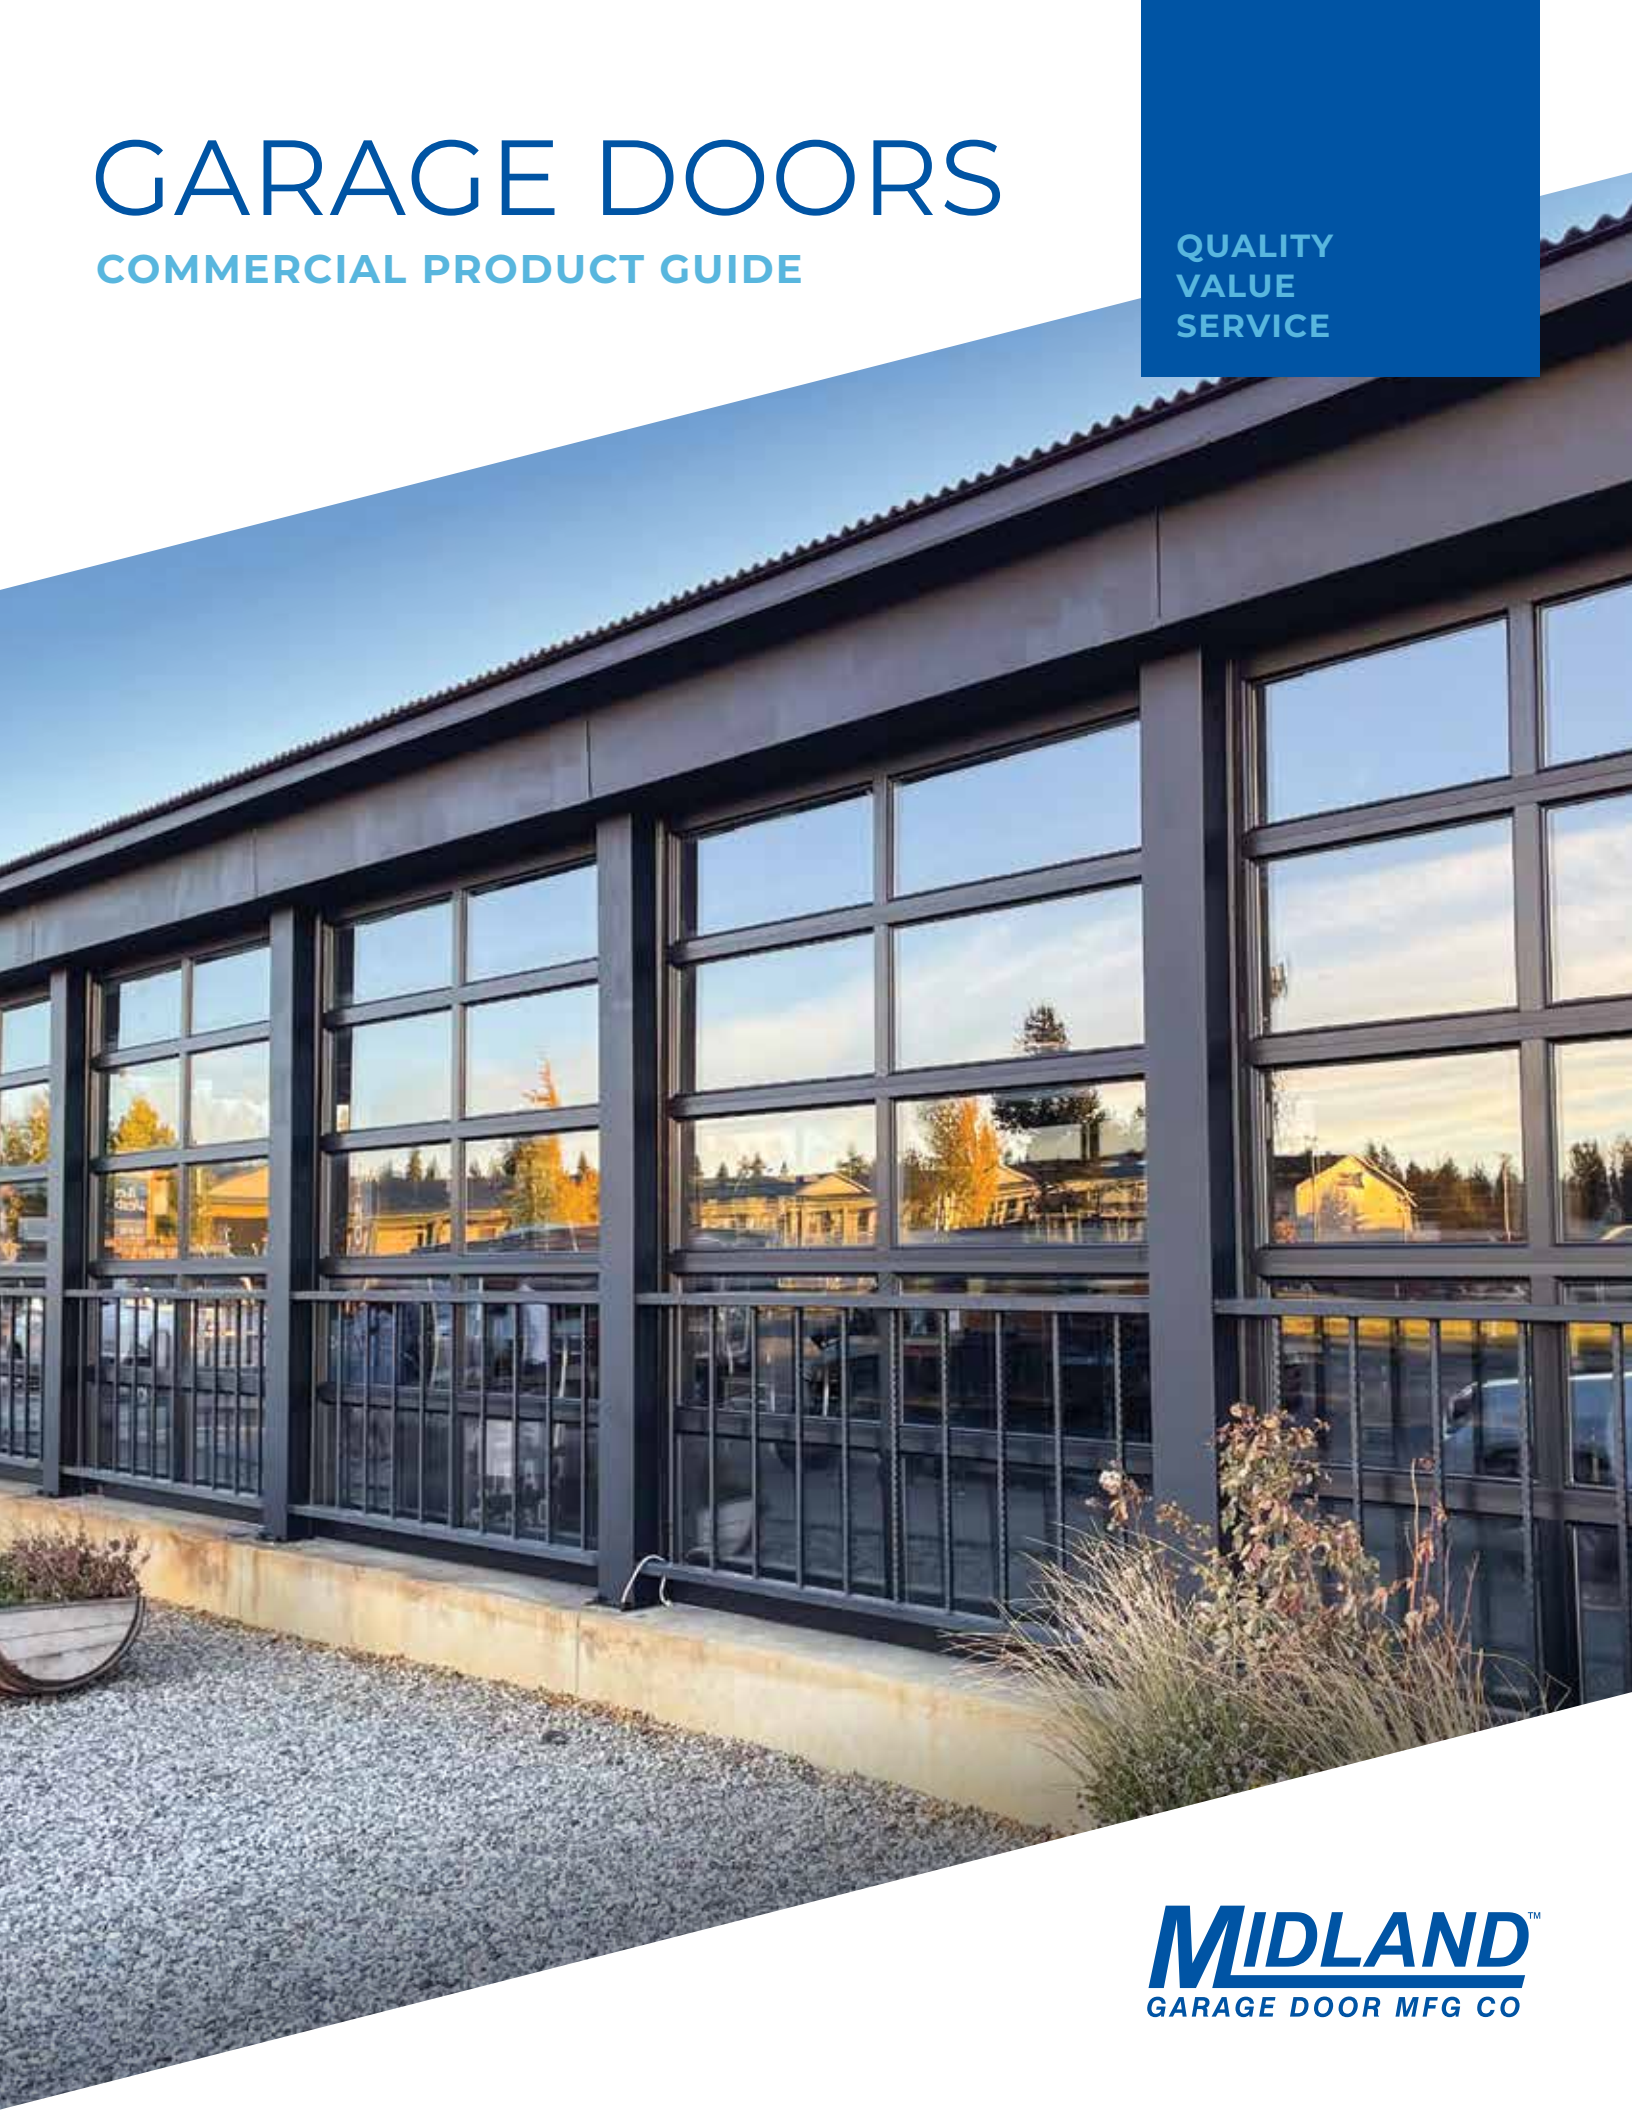



MIDLAND[™]
GARAGE DOOR MFG CO

COMMERCIAL
THERMOGUARD™

UNCOMPROMISING
QUALITY AND
STRENGTH




COLORS

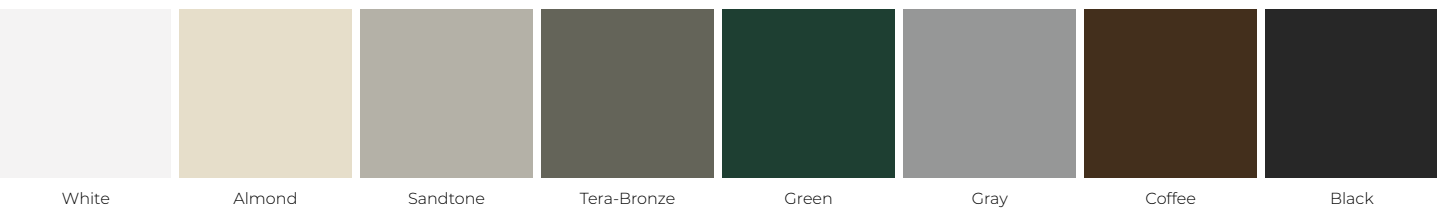

Printed colors may not be accurate. Contact your Midland dealer for exact color samples

PANEL DESIGN

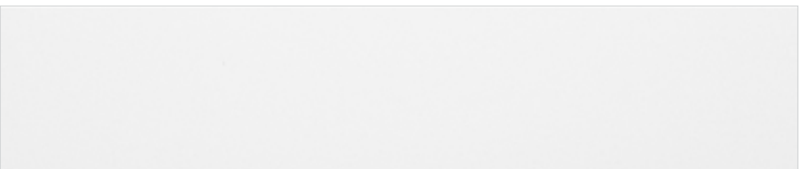


SPECIFICATIONS	3-Inch ThermoGuard™	2-Inch ThermoGuard™
U-Factor R-Value	0.11 26.0	0.14 18.0
Foam/Insulate	Polyurethane	Polyurethane
Thickness	3 inches	2 inches
Maximum Width	40 ft. 2 In.	32 ft. 2 in.
Exterior Steel	27 gauge 20 gauge upgrade, white only	27 gauge 20 gauge upgrade, white only
Interior Steel	27 gauge	27 gauge
Warranty* Excludes Springs	10 years	10 years

*For full warranty details contact your Midland dealer


*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.




WINDOWS

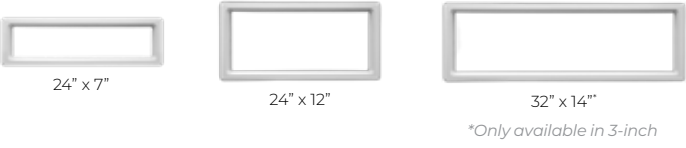


TRACK MOUNTING



TRACK CONFIGURATIONS

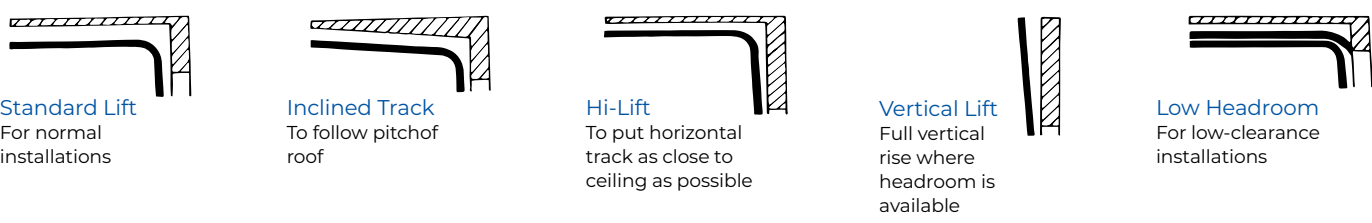

GLASS

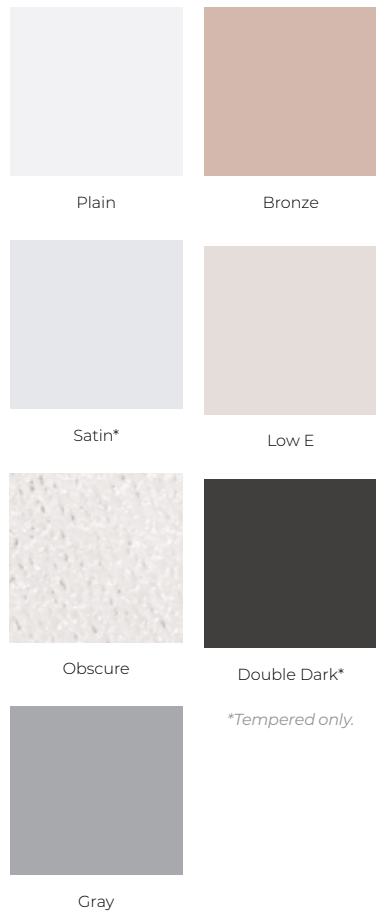

PACKAGE UPGRADES

Heavy-Duty Hardware Package available

COMMERCIAL
ENERGYSAVER™

SIMPLICITY AND
HEAVY-DUTY
RELIABILITY



COLORS

White

Sandtone

Tera-Bronze

Coffee


Black



Color Select™

Printed colors may not be accurate. Contact your Midland dealer for exact color samples

PANEL DESIGN

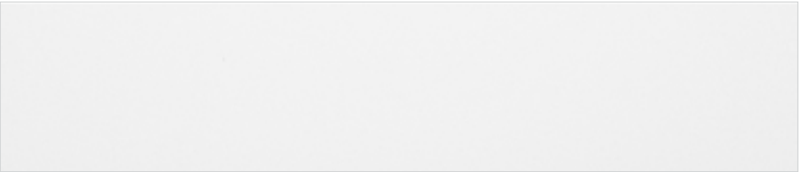

SPECIFICATIONS	3-Inch EnergySaver™	2-Inch EnergySaver™
U-Factor R-Value	0.15 17.05 	0.22 9.25 
Foam/Insulate	Extruded closed-cell polystyrene	Polystyrene
Thickness	3 inches	2 inches
Maximum Width	40 ft. 2 in.	24 ft. 2 in.
Exterior Steel	25 gauge 20 gauge upgrade, white only	25 gauge 20 gauge upgrade, white only
Interior Steel	25 gauge	25 gauge
Warranty* Excludes Springs	10 years	10 years

*For full warranty details contact your Midland dealer

*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



WINDOWS



24" x 7"




24" x 12"



32" x 14"

*Only available in 3-inch

TRACK MOUNTING




Reverse Angle Mounted Track
Continuous leg-in angle to attach to steel jambs




Angle Mounted Track
Continuous leg-out angle used on larger doors to attach to wood jambs


TRACK CONFIGURATIONS



Standard Lift
For normal installations




Inclined Track
To follow pitch of roof



Hi-Lift
To put horizontal track as close to ceiling as possible




Vertical Lift
Full vertical rise where headroom is available



Low Headroom
For low-clearance installations


GLASS




Plain



Bronze



Satin*



Low E



Obscure



Double Dark*



Gray

*Tempered only.

PACKAGE UPGRADES


Harsh environment and Heavy-Duty Hardware Packages available

COMMERCIAL
FULLVIEW & STYLIST

NATURAL LIGHT
WITH STRENGTH
AND STABILITY



FRAME COLORS

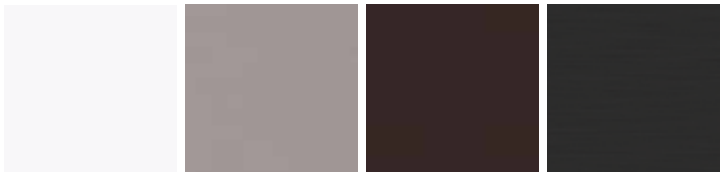

Color Select™

Printed colors may not be accurate. Contact your Midland dealer for exact color samples

PANEL DESIGN



FullView Clear Anodized



Stylist Black Anodized

GLASS



Plain**

Bronze



Satin**

Low E



Obscure

Double Dark*

**Stylist is only available in Plain & Satin Stylist.



Gray

*Tempered only.


SPECIFICATIONS

	Stylist	FullView Glass Panel	FullView Anodized Aluminum Panel
U-Factor	Not Tested	0.85 	Not Tested
Frame	6063-T Aluminum	6063-T Aluminum	6063-T Aluminum
Thickness	2 inches	2 inches	2 inches
Glass	½ inch insulated ¾ inch insulated	½ inch insulated ¾ inch non-insulated ⅞ inch non-insulated	—
Panel	—	—	½ inch insulated
Rails	Insulated non-insulated	Insulated non-insulated	Insulated non-insulated
Air Infiltration Seal	•	•	•
Warranty* Excludes Springs	5 years	5 years	5 years


*For full warranty details contact your Midland dealer




TRACK CONFIGURATIONS



Standard Lift
For normal installations




Inclined Track
To follow pitch of roof



Hi-Lift
To put horizontal track as close to ceiling as possible



Vertical Lift
Full vertical rise where headroom is available



Low Headroom
For low-clearance installations

COMMERCIAL RIBBED
CS20, CS24, CS26

RELIABLE
QUALITY
PERFORMANCE



COLORS



Printed colors may not be accurate. Contact your Midland dealer for exact color samples

PANEL DESIGN



SPECIFICATIONS	CS20	CS24	CS26
Plain Steel U-Factor	Unrated	Unrated	Unrated
U-Factor R-Value: T-Bond:	0.38 7.05	0.38 7.05	0.38 7.05
Thickness	2 inches	2 inches	2 inches
Maximum Width	40 ft 2 in	24 ft 2 in	16 ft 2 in
Exterior Steel	20 gauge	24 gauge	26 gauge
Warranty* Excludes Springs	10 years	10 years	25 years

*For full warranty details
contact your Midland dealer


*ColorSelect™ uses Sherwin
Williams Polane® Solar Reflective
Polyurethane Enamel, providing a
durable, heat-repelling coating.



WINDOWS




GLASS

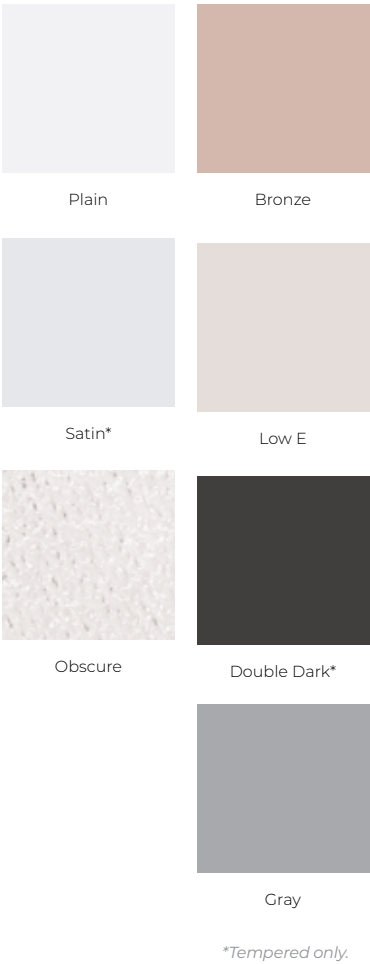


PACKAGE UPGRADES
Heavy-Duty Hardware Package available

TRACK MOUNTING




TRACK CONFIGURATIONS

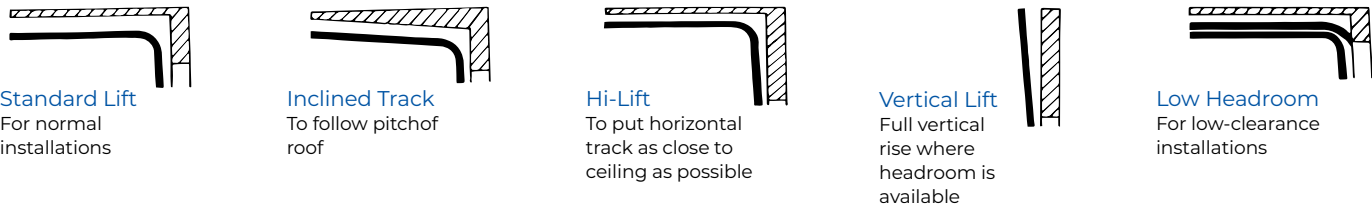

NOT ALL GARAGE DOORS ARE CREATED EQUAL

WHERE IS THE PROOF?

The infrared images below show a side-by-side comparison of a Midland ThermoGuard™ door, next to a competitor's polyurethane door. This was observed with the doors installed next to the other in the same location. The outside temperature was 0°F and the inside temperature was 55°F. The dark areas show where energy loss occurs.

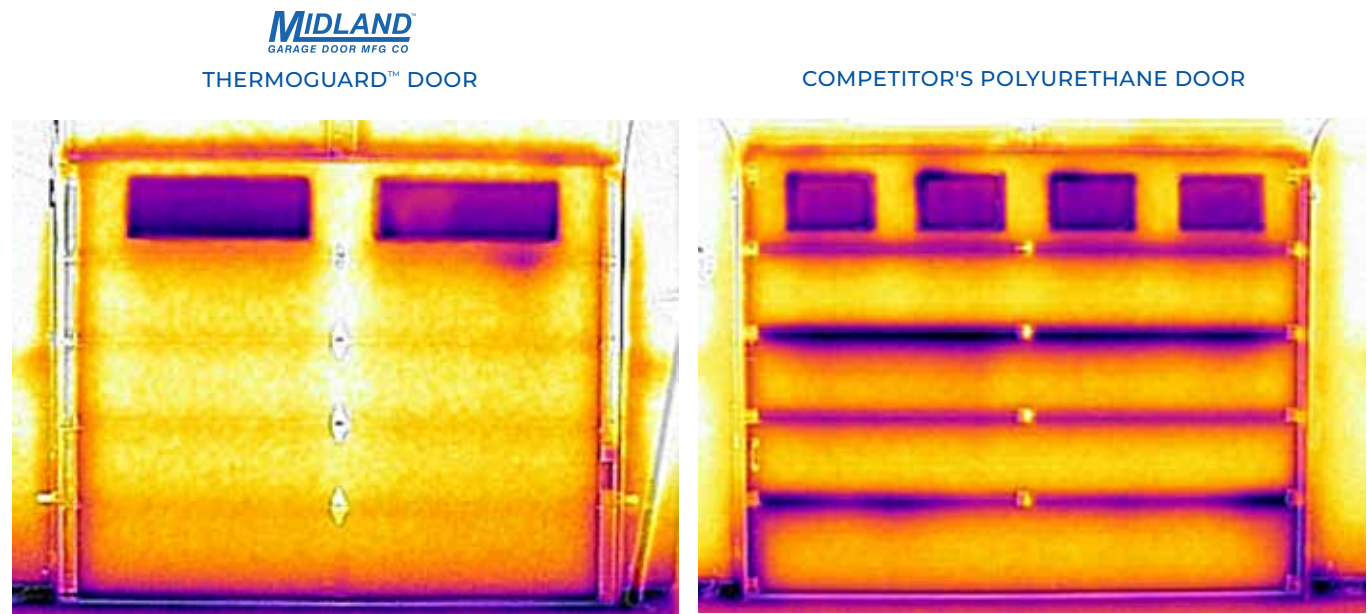

WHY DO MIDLAND THERMOGUARD™ DOORS PERFORM BETTER?

- 1

TRUE THERMAL BREAK

Midland door sections utilize a true thermal break that minimizes energy loss between sections
- 2

SUPERIOR FIT

Midland door sections have tighter and more consistent section gaps
- 3

STRUCTURAL RIGIDITY

Concealed full-height vertical center stiles and tailor-made custom end stiles provide structural rigidity
- 4

MINIMAL AIR INFILTRATION

A flexible commercial-grade seal between the door sections minimizes air infiltration
- 5

MOISTURE RESISTANT

Closed cell end dams help to keep moisture away from insulation
- 6


QUALITY STEEL

Hot dipped galvanized steel, that is conditioned and embossed with a pebble texture for maximum durability

WHY U-FACTOR MATTERS

THE KEY TO BETTER ENERGY EFFICIENCY

R-Value is not the most accurate indicator of thermal performance in a garage door. U-Factor is commonly used in energy efficiency standards and is considered a more comprehensive and accurate metric than R-Value.

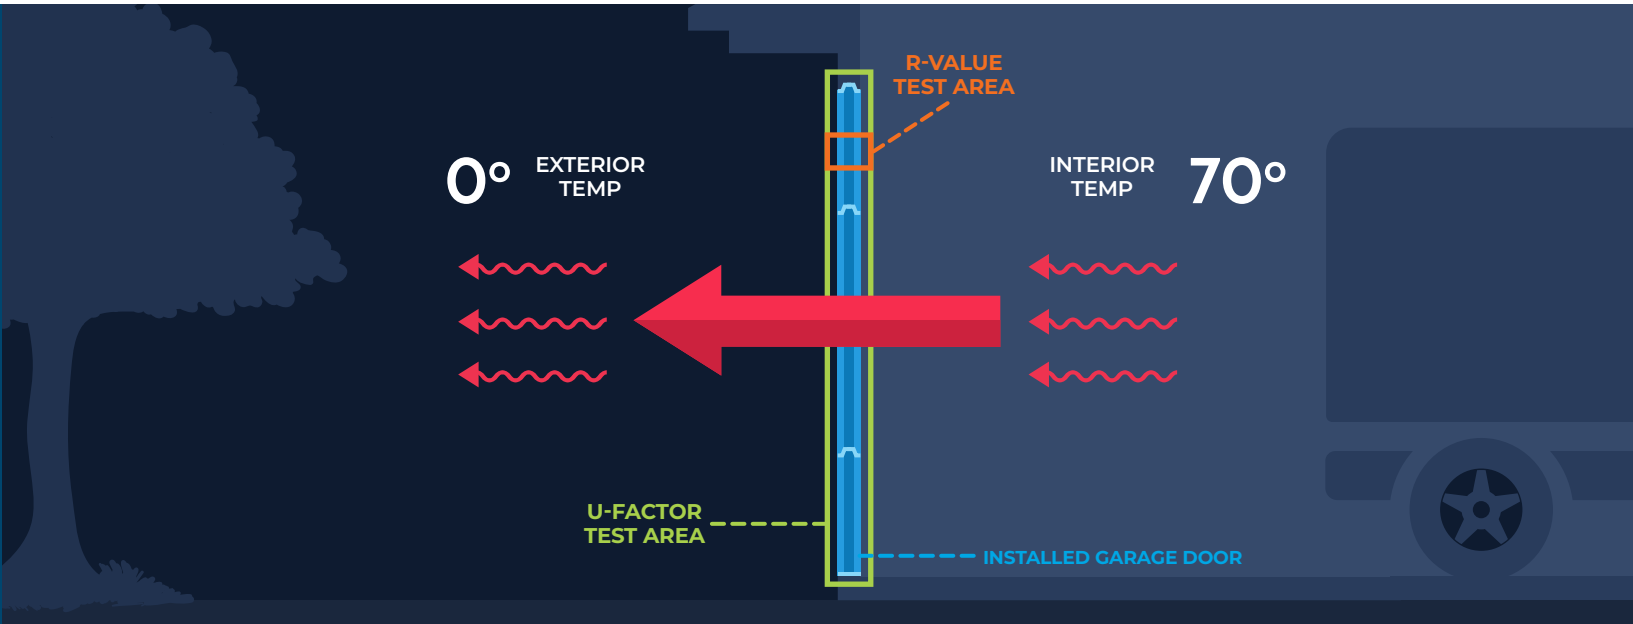

	U-FACTOR	R-VALUE
Measurement	Thermal Transmittance	Thermal Resistance
Definition	Measures how much heat loss occurs	Calculates how resistant the door is to heat loss
Testing Standards	Third party testing with strict guidelines and inspection	Unregulated with no standard guidelines
Testing Area	Entire installed garage door is tested	Small section is tested and used for resistance calculation
Values	Lower U-factor means better thermal performance	Higher R-value means better thermal performance
Best Application	Complex assemblies like windows and doors	Simple elements of building assemblies like insulation
Reflects Entire Door Performance	✓	
Verified By DASMA Door & Access Systems Manufacturers Association	✓	



THERMAL PERFORMANCE VERIFICATION PROGRAM

Is a program to certify and verify the thermal performance ratings of sectional doors. Products included in this program will have a badge, label or icon.





NORTH DAKOTA 800.437.4056

MINNESOTA 800.521.0047

NEBRASKA 800.533.8358

midlandgaragedoor.com



YOUR LOCAL GARAGE DOOR PROFESSIONAL

© 2024 MIDLAND GARAGE DOOR MFG. CO. INC. ALL RIGHTS RESERVED