
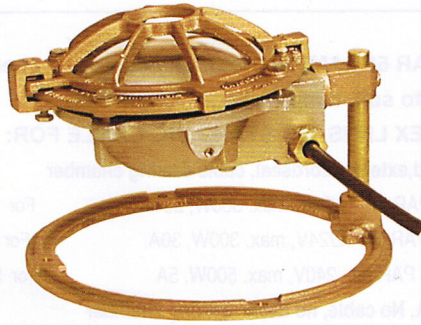



SUBMERSIBLE LIGHTFIXTURE **PEM E300**

Low Profile Lightfixtures with water cooled reflector
120V / 240V - Max. 500W , 12V / 100W , 24V / 150W

E300A + 10-6




E300A + 10-6 + B9




115mm
4.527"

E300A + 10-2

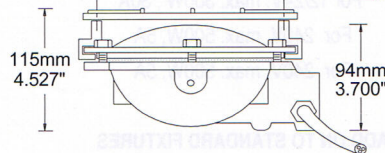


115mm
4.527"

E300A + B7S + B1S

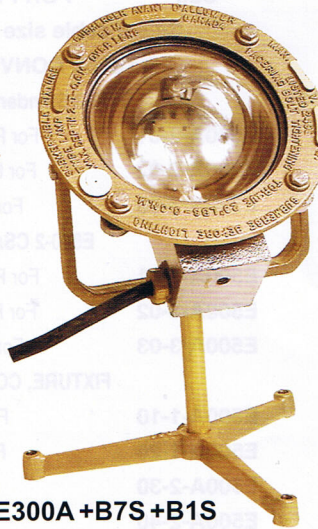

E300A



200mm
7.874"

E300A + B9



E300A + B9

CONSTRUCTION OF LIGHTFIXTURE:

FIXTURE HOUSING & Facing : Cast Bronze. Stainless Steel fitted.

'S' and 'F' type fixtures have water cooled & chromed parabolic integral reflector.

'S' Option has polished reflector with concentrated beam output: Spot Light.

'F' Option has diffused output with better color rendition: Flood Light.

-36 Option has machined fit for AR111 / PAR36 Lamps.

LAMP, Quartz Halogen - OPTIONAL.

S & F , 120V / 240V, Max. 500W, Mini Candelabra, T4-MC / E11 base.

JC , 12V or 24V 6.35-1.0 base, Max. 100W / 12V & 150W / 24 V.

-36 , 12V - AR111 max. 100W or PAR36 Lamps.

LAMP HOLDER:

For S & F, T4-MC: 120V / 240V fixtures: Ceramic, mini-candelabra E11

For JC fixtures: G 6.35-1.0, Bi Pin base.

For -36, Fork terminals for screw connection of lamps and (2) holding clamps.

LENS: 143mm / 5.625" Diameter. See Lightfixture Supplement, Lenses

STANDARD: Convex cast glass, heat resistant and tempered. Clear or 5 colors.

OPTIONAL: Convex Dichro Colour Lens, in 10 colours

LENS GASKET:

Custom molded 'U' shape made of approved material for the application.

LENS SHADE -0-5 :

OPTIONAL: Required for clean & even, dichro. color illumination.

THERMAL CUT OFF:

Optional integral to protect cable entry. 120V & 240V single cable fixtures only.


ELECTRICAL CABLE:

Approved for the purpose with integral epoxy encapsulated, compression type cable entry in factory assembled fixtures.

See Lightfixture Supplement for cable sizing

MOUNTING OPTIONS: Optional. See opposite Page


E300A + 10-7 + B9

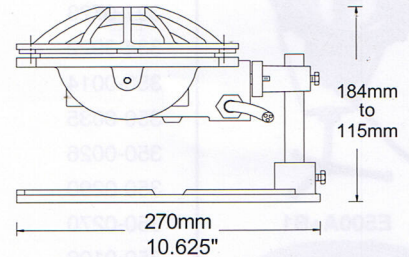

184mm
to
115mm

E300A + B60-1-2

Low Profile Niche

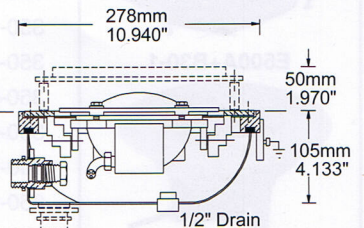


15° Tilt off centerline

CANDLE POWER

measured in open air 2m / 6.56 feet from clear lens without rockguard.

E300A-F - 500W / 120V



E300A-S - SP Adjusted - 500W / 120V

