

NOBLELIFT
Material Handling

OPL55N

Low-level Order picker



NEW / *Noblelift Products*
ARRIVAL

ISO9001 / ISO14001

//2020.06

NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD

www.nobleliftna.com

OPL55N

Low-level Order picker

OPL55N is a low-level order picker that has strong power and better stability when increasing or decreasing speed thanks to the German AC drive and Italian Controller. Plus its electric steering system and German REMA multi-functional handle provides driving comfort and increased efficiency.

4 point structure floating shock absorption platform and rubber pads minimize the vibration. The ergonomically curved backrest can eliminate driver fatigue. Side extraction battery compartment allows quick and easy battery replacement for multi-shift operations.

Fully upgraded features make picking easier and more efficient and it provides various optional configurations such as extension bracket, caution light, blue light, entry rollers, storage tray, double USB charging port. etc.



OPL55N Highlights

German handle to ensure precision handling




German REMA multifunctional handle

Reliable and ergonomically designed REMA handle' each button can be easily reached and controlled, which makes driving more comfortable.



USB charging port

Double USB charging port power up more equipment.

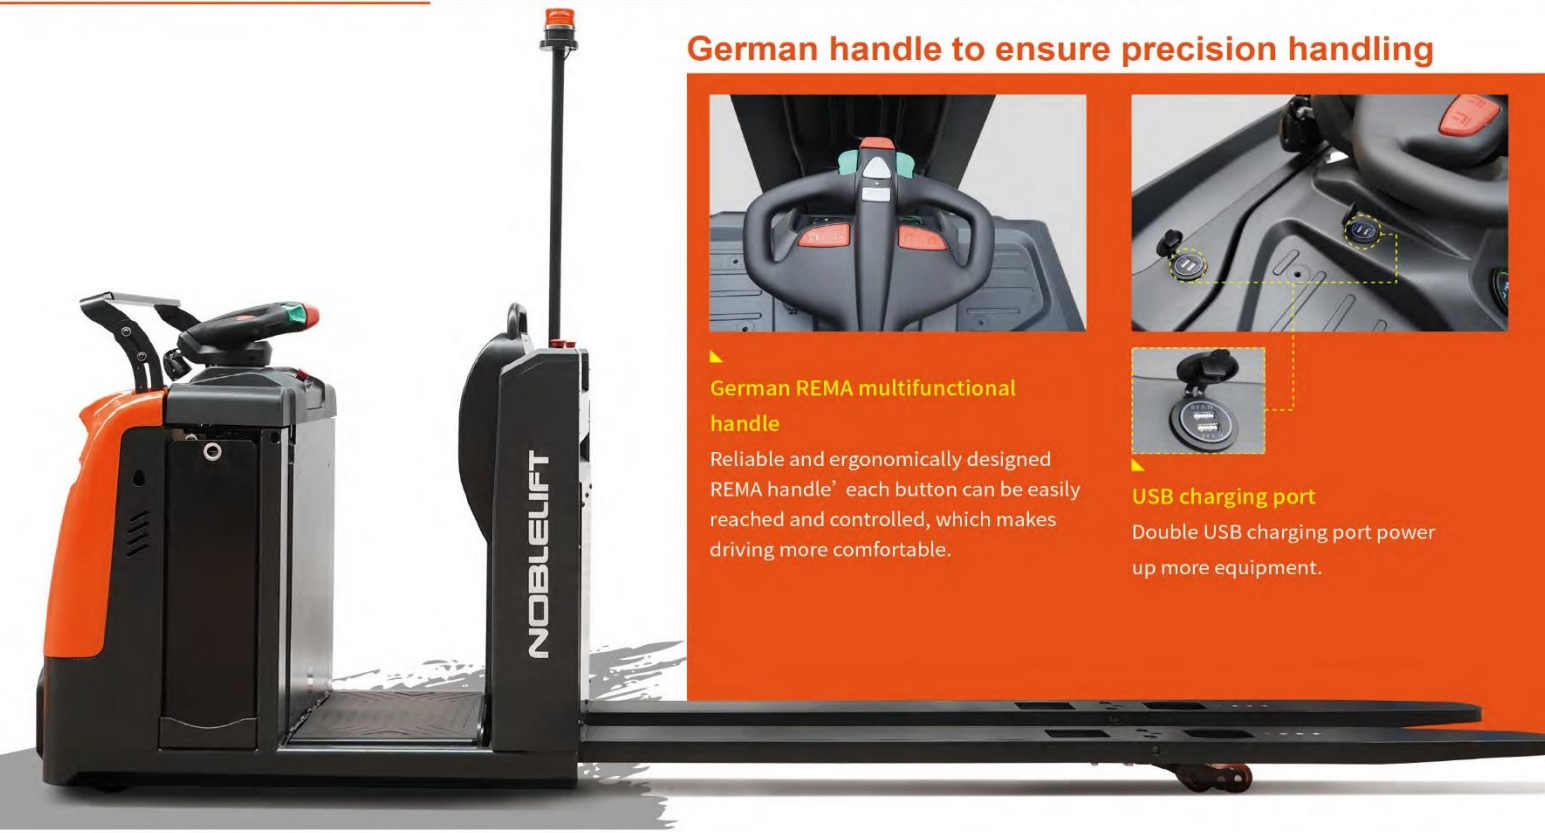

Well-designed and easy to maintain



Side extraction battery plus adjustable handling bracket makes battery replacement easier and quicker.



A variety of extension supports are available to meet the installation requirements of different extension equipment, such as WMS display, barcode scanner, storage tray, clipboards, etc.



The balance wheel is easily adjustable.



Easier to entry rollers.

Safe and comfortable, easy storage



The standard blue light is mounted in a way that highlights the path the truck is taking. Greatly improving pedestrian safety.



Safety flanks and non-slip materials on both sides of the backrest ensure operator safety during operations. Ergonomic handle to assist in entry and exit of operators compartment



Large storage tray can be used for storing stretch film, pens, tools, or other items needed for efficient operation.

Control Instrument and Multi-Function Handle



Robust and durable structure, high power and efficient driving technology



German AC drive technology

AC drive system performs perfectly thanks to its high power maintenance-free German Schab-muller AC drive motor and KORDEL gearbox while smoothly increasing or decreasing speed.



Italian ZAPI Controller

Provide clients with reliable, flexible and high-performance control system solution as adopting Italian ZAPI drive controller.




High power and performance pump

Lifting is easier and more efficient using powerful, high performance pump.



German drive wheel has a high load capacity, is durable and lasts longer than other comparable drive wheels.



Other optional parts

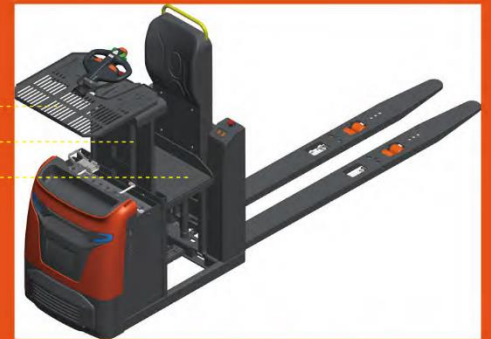

A: The storage shelf used while lifting operator's platform increases productivity for stock picking and re-stocking.

B: The operation platform can be lifted to the second rack which allows picking or retrieving more efficient.

C: Operator's platform can be lowered by using the foot switch, allowing operator use of hands.

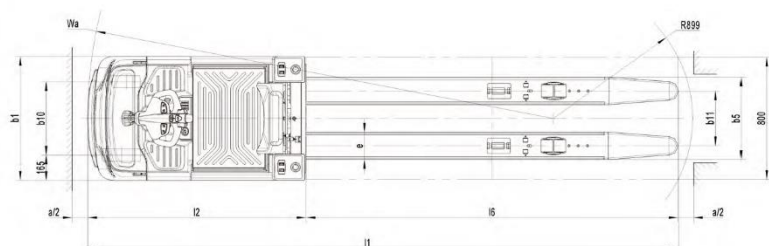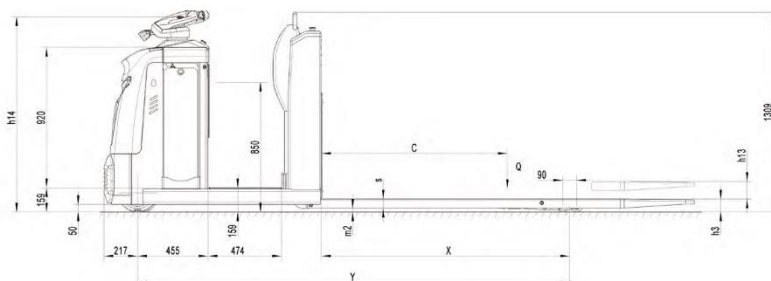

Type sheet for industrial truck acc. to VDI2198

Distinguishing mark				
1.2	Manufacturer's type designation			OPL55N
1.3	Drive			Battery
1.4	Operator type			Order-pucker
1.5	Load capacity/Rated load	Q (lbs)		5500
1.6	Load center distance	c (in)		48
1.8	Load distance, the centre of drive axle to fork	x (in)		60.4 ¹⁾
1.9	Wheelbase	y (in)		107 ¹⁾
Weight				
2.1	Service weight	lbs		2826
2.2	Axle loading, laden front/rear	lbs		2838/5566
2.3	Axle loading, unladen front/rear	lbs		2156/748
Tires, chassis				
3.1	Tires			Polyurethane(PU)
3.2	Tire size,front	Øxw (in)		Ø 250×80
3.3	Tire size,rear	Øxw (in)		Ø 82×82
3.4	Additional wheels(dimensions)	Øxw (in)		Ø 180×80
3.5	Wheels,number front/rear(x=driven wheels)			1+1x/4
3.6	Tread,front	b ₁₀ (in)		18.9
3.7	Tread,rear	b ₁₁ (in)		14.2
Dimensions				
4.4	Lift	h ₃ (in)		7.87
4.9	Height of tiller in drive position min./max.	h ₁₄ (in)		50.4
4.15	Height, lowered	h ₁₃ (in)		3.3
4.19	Overall length	l ₁ (in)		148.4 ²⁾
4.20	Length to face of forks	l ₂ (in)		53.9 ²⁾
4.21	Overall width	b ₁ (in)		31.9
4.22	Fork dimensions	s/e/l (in)		2.36/7/94.5
4.25	Width across forks	b ₅ (in)		21
4.32	Ground clearance, centre of wheelbase	m ₂ (in)		1
4.34	Aisle width for pallets 800 x1200 lengthways	Ast (in)		156.3 ³⁾⁴⁾
4.35	Turning radius	Wa (in)		116.7 ³⁾
Performance data				
5.1	Travel speed,laden unladen	km/h		5.6/7.4
5.2	Lift speed,laden/unladen	in/s		1.6/2.5
5.3	Lowering speed,laden/unladen	in/s		2.36/1.6
5.8	Max. gradeability, laden/unladen	%		6 / 12
5.10	Service brake			Eletromagnetic
Electric-engine				
6.1	Drive motor rating S2 60min	kW		3.5
6.2	Lift motor rating at S3 10%	kW		2.9
6.3	Battery acc. to DIN 43531/35/36A,B,C,norm			No,3PzS
6.4	Battery voltage,nominal capacity K5	V / Ah		24 / 465
6.5	Battery Weight	lbs		775
6.6	Energy consumption acc. to VDI cycle	kWh/h		0.94
Additional data				
8.1	Type of drive control			AC speed Control
8.4	Sound level at driver's ear acc. to EN 12053	dB(A)		<70

1)、After the fork is lowered x=63in, y=110in;

2)、When crash pad is installed, l1=150in, l2=55.5in

3)、When crash pad is installed, Wa=118.3in, Ast=158in

4)、According to the VDI diagonal algorithm Ast=original measurement+3.7in