

www.nobleliftna.com

NOBLELIFT
NORTH AMERICA

LITHIUM

PSE11CB SERIES

1,100 lbs. Capacity
Counterbalanced Stacker



Capacity
1100lb



Lithium Battery



Compact Size



Low
Service Weight




Efficient
Operation



Highly
Cost Effective



Easy
Maintenance



Low noise

Why choose between price and quality **WHEN YOU CAN HAVE BOTH!**



HIGHLIGHTS

- ▶ American Curtis Travel Controller with CAN-bus control
- ▶ 24V DC permanent magnetic drive motor
- ▶ Lithium battery: 24V/60Ah
- ▶ Built-in charger: 24V/25A 110V
- ▶ Fast charging 2.5 hours
- ▶ Centered drive motor for excellent stability and traction
- ▶ Operator protection plexiglass
- ▶ Smart handle with keyless pin-code panel, RFID card and LCD display with battery indicator and hour meter
- ▶ Pinwheel turning - drive with tiller in vertical position
- ▶ Ergonomic control handle with horn and emergency belly button
- ▶ Dual butterfly-style thumb controls for traveling
- ▶ Electric lifting and lowering buttons
- ▶ Travel speed: 2.9mph (unloaded), 2.8mph (loaded)
- ▶ Speed reduction in turns

PSE11CB SERIES

1,100 lbs. Capacity
Counterbalanced Stacker


The PSE11CB Lithium Counterbalanced Stackers have a compact design, a small turning radius and a low service weight. They are designed to work in confined spaces and are ideal for mezzanine applications. They offer strong gradeability, fast speed and their increased ground clearance allows them to work in rough floor conditions. The forks can be adjusted and can adapt to most pallets. Increase your work productivity with these highly maneuverable, very low maintenance counterbalanced stackers.

COMPACT MINI-COUNTERBALANCE STACKER



ERGONOMIC. SAFE. CONVENIENT.

Tiller and Smart Handle – The long ergonomic tiller is easier to steer and it allows operator to work at a safer distance. A multi-function Smart handle with a Curtis controller and CAN-bus technology delivers reliability and superior functionality.

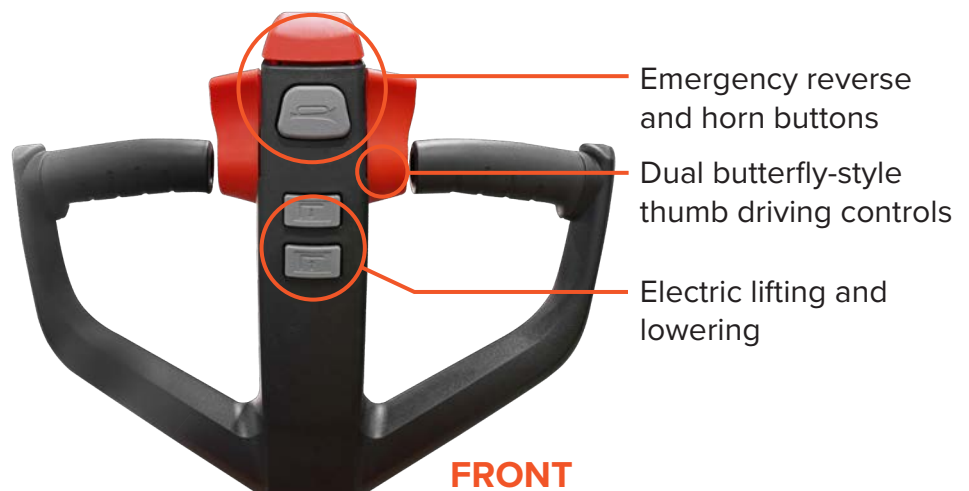

HIGH EFFICIENCY AND GREAT VISIBILITY



Built-in charger, emergency stop button, and USB connector for charging and powering of additional devices during operations.

The PSE11CB Lithium Counterbalanced Stacker can easily fit into a cargo lift.



Mast layout is optimized for a wide view and clear visibility while operating.

CAN-bus



CURTIS

Easily check condition and troubleshoot with Curtis controller and CAN-bus technology.

LONG LASTING AND SAFE LITHIUM POWER

NOBLELIFT uses Lithium-Iron Phosphate batteries, the longest lasting and safest lithium battery available. Our lithium batteries are equipped with a Battery Management System (BMS), thermal management system, and an automotive-grade DC high-voltage control system. BMS manages charging and discharging data to ensure safety throughout its life cycle.

PSE11CB Series Stackers have a 3 year or 6,000 hours warranty on the lithium battery cells.





ADVANTAGES OF LITHIUM POWER

LITHIUM BATTERY ADVANTAGES

Lead-Acid Battery		Lithium Battery
Lower fleet availability - Work is interrupted because battery needs to be fully charged before next use	Productivity - Memory Effect 	100% Fleet availability - Opportunity charging allows battery to be charged in between use
Periodic battery replacement	Service Life 	Batteries last 3 times longer and do not need to be replaced
Outsourced or in-house maintenance personnel required	Ongoing Maintenance 	No maintenance cost
8-10 Hours - 2 or more batteries per lift truck	Charge Duration 	2.5 Hours - 1 Battery per lift truck
Build an expensive battery room with ventilation	Battery Room 	No battery room needed
Releases hydrogen while charging - Can result in explosion - Acid burns can happen during maintenance	Dangerous Substances 	No dangerous substances
Power loss	Power Savings 	No power loss - Reduces energy consumption by 35%

Fast-charging maintenance-free Lithium battery is fully charged in 2.5 hours. Battery can be opportunity charged during user breaks and during shift changes which allows the truck to run continuously through multi-shift operations. No battery changes are necessary.

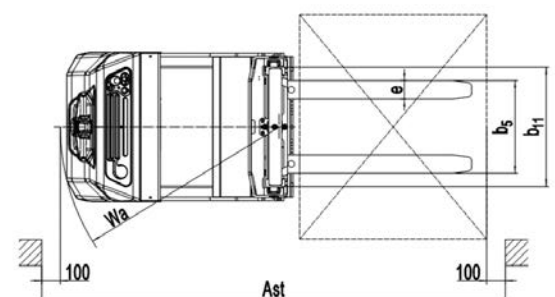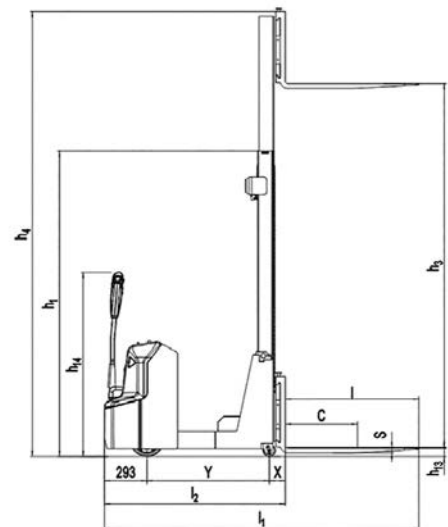

PSE11CB Series Counterbalanced Stacker					
Designation	Lowered mast height h1 (in)	Free lift height h2 (in)	Lift height h3 (in)	Extended mast height h4 (in)	Lift + fork height h3+h13 (in)
Single-stage mast	77.2	59.25	59.3	81.3	61.8
Two-stage mast	71.7	-	99.8	121.85	102.4
	77.2	-	111.6	133.66	114.2
	83.1	-	123.4	145.47	126

Identification						
1.2	Model		PSE11N-CB-62	PSE11N-CB-102	PSE11N-CB-114	PSE11N-CB-126
1.3	Drive (electric – battery or mains, diesel, petrol, fuel gas, manual)		Lithium			
1.4	Type of operation (hand, pedestrian, standing, seated, order picker)		Pedestrian			
1.5	Load capacity / rated load	Q (lb)	1,100			
1.6	Load center distance	c (in)	24			
1.8	Load distance, center of drive axle to fork	x (in)	4.3			
1.9	Wheel base	y (in)	33.3			
Weights						
2.1	Service weight	lb	2,497	2,541	2,585	2,629
2.3	Axle loading, laden front / rear	lb	660 / 3,250			
2.4	Axle loading, unladen front / rear	lb	1,631 / 959			
Wheels, Chassis						
3.1	Tires (solid rubber, superelastic, pneumatic, polyurethane)		Polyurethane (PU)			
3.2	Tire size, front	Øxw (in)	Ø 9.1 x 3			
3.3	Tire size, rear	Øxw (in)	Ø 3.3 x 2.8			
3.4	Additional wheels (dimensions)	Øxw (in)	/			
3.5	Wheels, number front / rear (x = driven wheels)		1x/4			
3.6	Tread, front	b ₁₀ (in)	/			
3.7	Tread, rear	b ₁₁ (in)	23.7			
Basic Dimensions						
4.2	Lowered mast height	h ₁ (in)	77.2	71.7	77.2	83.1
4.4	Lift	h ₃ (in)	59.3	99.8	111.6	123.4
4.5	Extended mast height	h ₄ (in)	81.3	121.85	133.66	145.47
4.9	Height of tiller in drive position min./max.	h ₁₄ (in)	29.5 / 45.87			
4.15	Height, lowered	h ₁₃ (in)	2.56			
4.19	Overall length	l ₁ (in)	85.24			
4.20	Length to face of forks	l ₂ (in)	49			
4.21	Overall width	b ₁ (in)	31.57			
4.22	Fork dimensions	s/e/l (in)	1.38 / 3.94 / 42			
4.25	Width over forks	b ₅ (in)	9.92 - 27.56			
4.32	Ground clearance, center of wheelbase	m ₂ (in)	2.17			
4.33	Right Angle Stack with 40x48 pallet	Ast (in)	103.54			
4.35	Turning radius	Wa (in)	46.26			
Performance Data						
5.1	Travel speed, laden / unladen	mph	2.8 / 2.9			
5.2	Lift speed, laden / unladen	ft/s	0.36 / 0.46			
5.3	Lowering speed, laden / unladen	ft/s	0.46 / 0.43			
5.8	Max. gradeability, laden / unladen	%	5 / 8			
5.10	Service brake		Electromagnetic			
E-Motor						
6.1	Drive motor rating S2 60 min	HP	1			
6.2	Lift motor rating at S3 10%	HP	3			
6.3	Battery acc. to DIN 43531 / 35 / 36 A, B, C, no		/			
6.4	Battery voltage, nominal capacity K5	V/Ah	24V/60Ah			
6.5	Battery weight	lb	37.4			
6.6	Energy consumption acc. to VDI cycle	HP*h	0.6			
Others						
8.1	Type of drive control		DC			
8.4	Sound level at driver's ear - acc. to EN 12053	dB(A)	<70			

A GLOBAL LEADER

NOBLELIFT is a global leader in Lithium Technology. We manufacture more than 200 categories and around 30 series of each product. Our products are designed to meet different application demands and are well accepted by our customers in more than 100 countries and regions in Europe, America, Asia, Africa and more.

Products include: sit-down forklifts, rough terrain forklifts, narrow aisle forklifts, walkie-stackers, order pickers, electric pallet trucks, scissor lifts, tuggers, tow tractors, scrubbers/sweepers, lift tables, manual pallet jacks and more.



FORKLIFTS



NARROW AISLE



STACKERS



POWERED PALLET TRUCKS



SCISSOR LIFTS



TUGGERS



SCRUBBERS

NOBLELIFT
NORTH AMERICA

2475 S. Wolf Road
Des Plaines, IL 60018
T: 847-595-7100
F: 847-595-7200
sales@nobeliftna.com
www.nobeliftna.com



Website

AUTHORIZED DEALER

