

PERFORMAX[®]

2024 RUBBER DOOR PRODUCT LINE



C.H.I. [®]
a **NUCOR** company

chiohd.com

MAXSPEED®

High Speed Springless Impactable Rubber Door



Impactable design and
breakaway bottom bar
minimize damage and lower
maintenance costs

Direct variable frequency
drive & springless operation
high speed rubber doors



The logo for MAXSPEED, with 'MAX' in red and 'SPEED' in black, followed by a registered trademark symbol.

High Speed Springless Impactable Rubber Door



SPECIFICATIONS

Standard Features

OPENING SPEED	Up to 48" per second
MAX SIZE	40' x 30'
DRIVE	Direct Variable Frequency Drive
CURTAIN	1/4" Reinforced Rubber Curtain
GUIDE WIDTH	5" Powder Coated Finish on Steel Components
SAFETY DEVICES	Wireless safety reversing edge, inertia brake, reflective photo eye
ELECTRICAL	460v / 3 Phase, Other Voltages Available

Optional Features

MECHANICAL	Hood & Motor Cover, 2" High Visibility Strip
SAFETY DEVICES	14" x 14" Vision Windows
ACTIVATION DEVICES	Light Curtain
CURTAIN COLORS	Floor Loops, Pull Cord, Falcon Eye Motion Sensors
APPLICATIONS	Black [standard], Blue, and Gray
	Transportation, Manufacturing Facilities, Heavy Industries


MAXPRO®

High Speed Springless Impactable Rubber Door



Low profile footprint,
perfect for rolling steel door
replacements

Corrosion resistant
galvanized side frames add
to product longevity

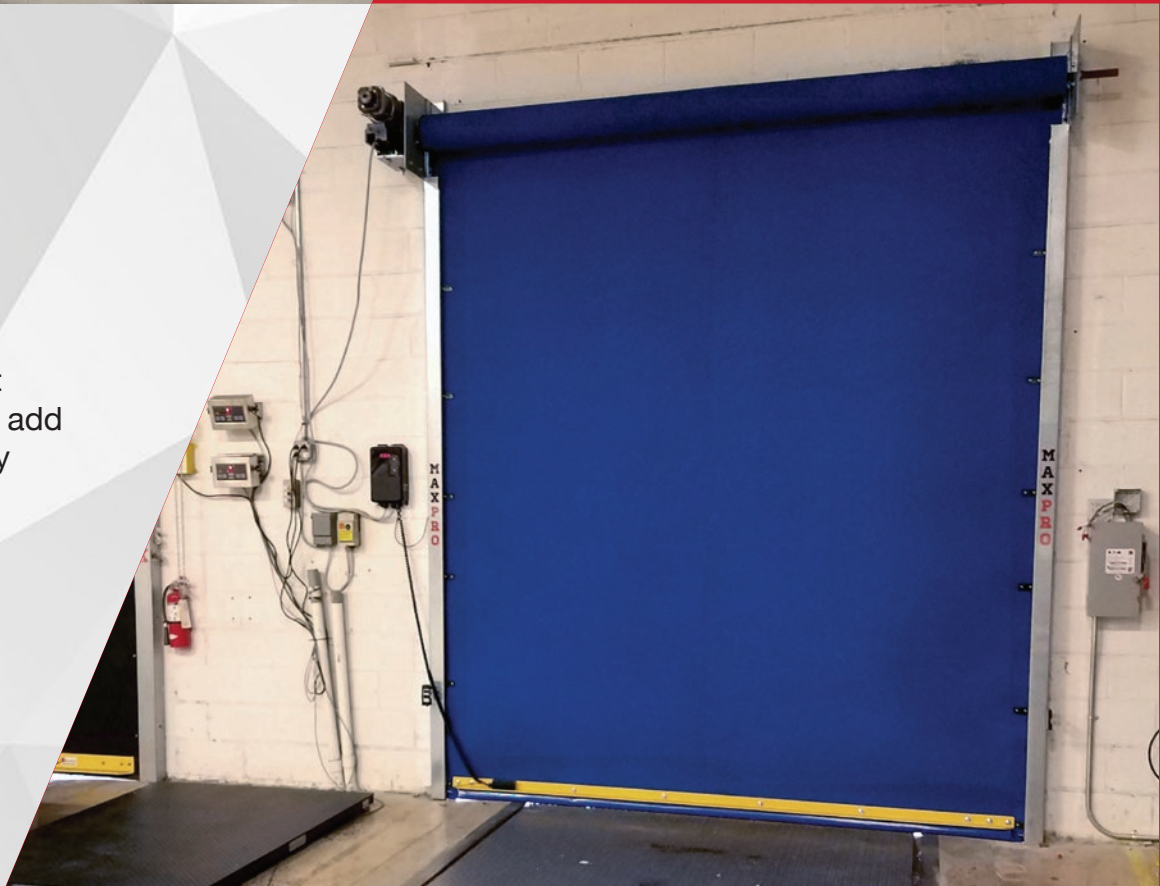

MAXPRO®

High Speed Springless Impactable Rubber Door



SPECIFICATIONS

Standard Features

MAX SIZE	18' x 18'
DRIVE	Direct Drive Single Speed Motor
CURTAIN	1/4" Reinforced rubber
GUIDE WIDTH	3-1/2" Powder coated guides
SAFETY DEVICES	Inertia brake, reflective photo eye
ELECTRICAL	575v / 3 Phase, 460v / 3 Phase, 230v / 3 Phase

Optional Features

MECHANICAL	Hood & Motor Cover, 2" High Visibility Strip, Manual Chain Hoist, 14" x 14" Vision Windows
SAFETY DEVICES	Electrical Safety Reversing Edge
ACTIVATION DEVICES	Floor Loops, Pull Cord, Motion Sensors
CURTAIN COLORS	Black [standard], Blue, and Gray

MAXDOCK®

High Speed Springless Impactable Rubber Door



Springless engineering
reduces safety concerns
promoting a safer
work environment

Tight sealing properties eliminate
air and light infiltration and
reduce energy costs





MAXDOCK®

High Speed Springless Impactable Rubber Door

SPECIFICATIONS

Standard Features

MAX SIZE	10'x12'
DRIVE	Direct Drive Single Speed Motor
CURTAIN	1/4" Reinforced rubber
GUIDE WIDTH	3-1/2" Powder coated guides
SAFETY DEVICES	Inertia brake, reflective photo eye
ELECTRICAL	575v / 3 Phase, 460v / 3 Phase, 230v / 3 Phase

Optional Features

MECHANICAL	Hood & Motor Cover, 2" High Visibility Strip, Manual Chain Hoist, 14" x 14" Vision Windows
SAFETY DEVICES	Electrical Safety Reversing Edge
CURTAIN COLORS	Black [standard], Blue, and Gray



ARCHITECT DESIGN RESOURCES



Fire Shutter, Coakley Brothers Water Tower Building - Milwaukee, WI

BE INSPIRED

CONNECT WITH A CONSULTANT

Sometimes you need expert advice on new or challenging design ideas. That's why C.H.I. Overhead Doors has an architectural design support team dedicated to assisting you in every state of the design process: from determining the appropriate closure option to choosing the best door for your design.

Your Local Garage Door Professional