



Dimension

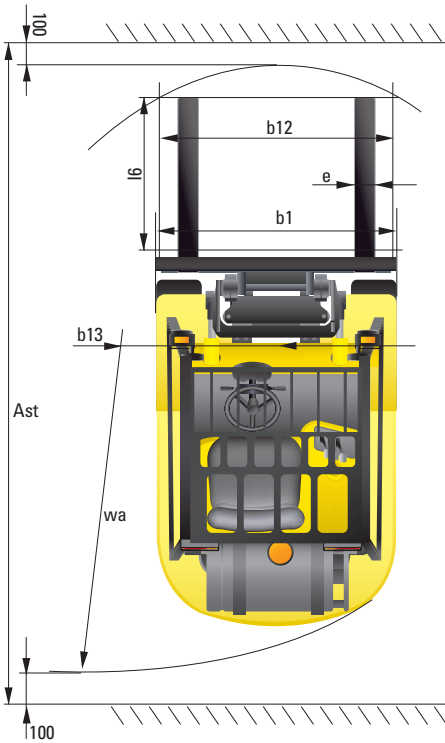

Specification

Identification				
1.1	Manufacturer	Hyundai	Hyundai	Hyundai
1.2	Manufacturer's type designation	15LC-7M	18LC-7M	20LC-7M
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas, manual	LP	LP	LP
1.4	Type of operation: hand, pedestrian, standing, seated, order-picker	seated	seated	seated
1.5	Load capacity / rated load	3,000	3,500	4,000
1.6	Load center distance	c (in)	24	24
1.8	Load distance, center of drive axle to fork	x (in)	15.5	15.7
1.9	Wheelbase	y (in)	49.2	49.2
Weights				
2.1	Service weight	lb	6,234.7	6,673
2.2	Axle loading, loaded front/rear	lb	8,093.2 / 1,448.4	8,913.3 / 1,618.21
2.3	Axle loading, unloaded front/rear	lb	2,425.1 / 3,809.6	2,284 / 4,389.4
Wheels, Chassis				
3.1	Tires: solid rubber, superplastic, pneumatic, polyurethane	Solid rubber	Solid rubber	Solid rubber
3.2	Tires size, front (Φ x width)	18 x 6 x 12.125	18 x 6 x 12.125	18 x 7 x 12.125
3.3	Tires size, rear (Φ x width)	14 x 5 x 10	14 x 5 x 10	14 x 5 x 10
3.5	Wheels, number front / rear (x=driven wheels)	x 2 / 2	x 2 / 2	x 2 / 2
3.6	Track width, front	(in)	32.6	33.9
3.7	Track width, rear	(in)	33.6	33.6
Basic Dimensions				
4.1	Mast / fork carriage tilt forward / backward(α / β)	degrees	6 / 8	6 / 8
4.2	Lowered mast height	h1 (in)	83.7	83.7
4.3	Free lift	h2 (in)	4.5	4.7
4.4	Lift height	h3 (in)	130.9	130.9
4.5	Extended mast height	h4 (in)	170.6	170.6
4.7	Overhead load guard (cab) height	h5 (in)	84.4	84.4
4.8	Seat height / standing height	h7 (in)	40.9	40.9
4.12	Coupling height	h10 (in)	9	9
4.19	Overall length	l1 (in)	117.8	119.2
4.20	Length to face of forks	l2 (in)	82.4	83.7
4.21	Overall width	b1 (in)	38.6	40.63
4.22	Fork dimensions	s / e / l (in)	1.4 x 3.9 x 35.4	1.4 x 3.9 x 35.4
4.23	Fork carriage ISO 2328, class / type A,B	II / A	II / A	II / A
4.24	Fork-carriage width	b12 (in)	35	35
4.31	Ground clearance, loaded, under mast	m1 (in)	3.54	3.66
4.32	Ground clearance, centre of wheelbase	m2 (in)	3.8	3.74
4.33	Aisle width for pallets 1000x1200 crossways	Ast (in)	137.3	138.4
4.34	Aisle width for pallets 800x1200 lengthways	Ast (in)	145.1	146.2
4.35	Turning radius	Wa (in)	74.5	75.6
4.36	Smallest pivot point distance	b13 (in)	20.8	20.8
Performance Data				
5.1	Travel speed, Unloaded	mph	10.5	10.5
5.2	Lift speed, Loaded / Unloaded	ft / min	128 / 133.9	128 / 133.9
5.3	Lowering speed, Loaded / Unloaded	ft / min	98.4 / 88.6	98.4 / 88.6
5.5	Drawbar pull, Loaded	lb	3,686	3,686
5.7	Gradient performance, Loaded	%	37.1	32.8
5.9	Acceleration time, loaded / unloaded (10m)	sec	NA	NA
5.10	Service brake	Mechanic / Hydraulic	Mechanic / Hydraulic	Mechanic / Hydraulic
Engine				
6.1	Engine manufacturer / type	MMC 2.0L	MMC 2.0L	MMC 2.0L
6.2	Engine power acc. to ISO 1585	PS	48	48
6.3	Rated speed	1 / min	2,300	2,300
6.4	No. of cylinder / cubic capacity	anz / cm³	4 / 1,997	4 / 1,997
6.5	Fuel consumption acc. to VDI cycle	liter / h	NA	NA
Other Details				
8.2	Type of drive control	Power Shift	Power Shift	Power Shift
8.3	Operating pressure(System / Attach)	bar	190 / 150	190 / 150
8.4	Oil volume	ℓ	30	30
8.5	Noise	db(A)	80	80

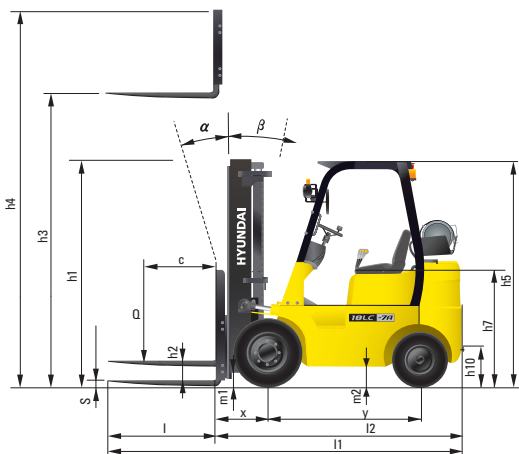

■ Some of the photos may include optional equipment.

HYUNDAI LPG FORKLIFT TRUCKS Applied Tier 4 Engine

15/18/20LC-7M

 **HYUNDAI**
MATERIAL HANDLING
6100 Atlantic Blvd Norcross, GA 30071
TEL (678) 823 7777 FAX (678) 823 7778

PLEASE CONTACT

www.hyundaiforkliftamericas.com 2018.04 Rev.2

 **HYUNDAI**
MATERIAL HANDLING

NEW criteria of Forklift Trucks

Hyundai introduces a new line of 7M series LPG forklift trucks.
Excellent power and performance make your business more profitable.



OPSS (Operator Presence Sensing System)
Mast tilting, lifting and lowering is inoperable when the operator is not in the seated position.

■ Some of the photos may include optional equipment.


Mast Specification

Mast Type		Maximum Fork Height (in)	Overall Height Lowered (in)	Tilt Angle (deg)		Free Lift (in)						Load Capacity w / o Integral Side Shift 24 in LC (lb)			Load Capacity w /Integral Side Shift 24 in LC (lb)			Truck Weight Unload (lb)		
						With Backrest			With / o Backrest			Single Tire			Single Tire			Single Tire		
				Fwd	Bwd	15LC-7M	18LC-7M	20LC-7M	15LC-7M	18LC-7M	20LC-7M	15LC-7M	18LC-7M	20LC-7M	15LC-7M	18LC-7M	20LC-7M	15LC-7M	18LC-7M	20LC-7M
2-Stage Limited Free Lift	V250	99.4	67.9	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	4,000	6,113	6,554	6,869
	V270	107.3	71.9	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	4,000	6,144	6,585	6,900
	V300	119.1	77.8	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	4,000	6,188	6,629	6,944
	*V330	130.9	83.7	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	4,000	6,232	6,673	6,989
	V350	138.8	87.6	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	4,000	6,263	6,704	7,017
	V370	146.7	91.5	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	4,000	6,292	6,733	7,048
	V400	158.5	97.4	6	8	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,500	3,950	6,347	6,788	7,101
	V450	178.1	111.2	6	6	4.5	4.5	4.7	4.5	4.5	4.7	3,000	3,500	4,000	3,000	3,350	3,800	6,493	6,933	7,249
	V500	197.8	121.1	6	6	4.5	4.5	4.7	4.5	4.5	4.7	3,000	2,850	3,300	2,525	2,700	3,125	6,567	7,008	7,321
	V550	217.5	130.9	6	5	4.5	4.5	4.7	4.5	4.5	4.7	2,425	2,200	1,870	2,271	2,075	1,750	6,612	7,052	7,368
3-Stage Full Free Lift	TF370 / TS370	147.0	71.1	6	6	30.2	30.2	30.6	50.0	50.0	50.3	3,000	3,500	4,000	3,000	3,500	4,000	6,464	6,905	7,213
	TF400 / TS400	158.9	75.0	6	6	34.2	34.2	34.5	53.9	53.9	54.2	3,000	3,500	4,000	3,000	3,500	3,900	6,506	6,947	7,262
	TF430 / TS430	170.7	78.9	6	6	38.1	38.1	38.4	57.8	57.8	58.1	3,000	3,500	4,000	3,000	3,500	3,800	6,548	6,989	7,304
	TF450 / TS450	178.5	82.9	6	6	42.0	42.0	42.4	61.8	61.8	62.1	3,000	3,500	3,990	3,000	3,475	3,750	6,590	7,030	7,346
	TF470 / TS470	186.4	84.8	6	6	44.0	44.0	44.3	63.7	63.7	64.1	3,150	3,500	3,925	2,975	3,425	3,700	6,616	7,057	7,372
	TF500 / TS500	198.2	88.8	6	6	48.0	48.0	48.3	67.7	67.7	68.0	3,075	2,850	3,850	2,875	2,700	3,625	6,660	7,101	7,416
	TF550 / TS550	217.9	96.7	6	5	55.8	55.8	56.1	75.6	75.6	75.9	2,775	2,075	2,600	2,600	1,650	2,450	6,742	7,183	7,498
	TF600 / TS600	237.6	104.5	6	5	63.7	63.7	64.0	83.4	83.4	83.7	1,650	1,150	1,425	1,550	1,050	1,325	6,900	7,341	7,657
	TF650 / TS650	257.3	112.4	3	3	71.6	71.6	71.9	91.3	91.3	91.6	1,425	1,100	1,325	990	1,000	1,000	7,000	7,440	7,756
	TF700 / TS700	277.0	120.3	3	3	79.4	79.4	79.8	99.2	99.2	99.5	1,100	770	660	990	675	550	7,079	7,520	7,835

* TS-Mast : Wide Visible 3 Stage Full Free Lift Mast with 2 Free Lift Cylinders.

* Standard

Load Capacity

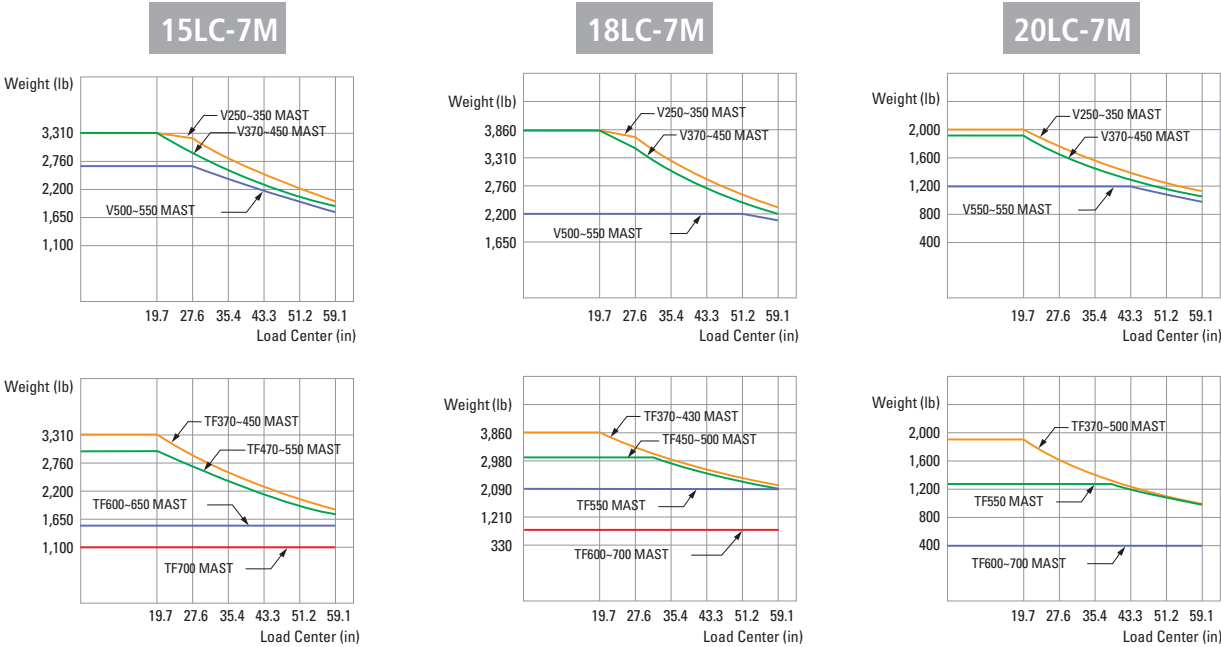

Optional Items

- **SIDE SHIFT**
- **INTEGRAL SIDE SHIFT**
- **FORK** : 29.5, 33.5, 41.3, 47.2, 53.1, 59.1 in (15/18LC-7M)
37.4, 39.4, 41.3, 45.3, 44.9, 47.2
53.1, 59.1, 63.0 in (20LC-7M)
- **OVER SHOE(Extension Fork)** : 51.2, 59.1, 66.9 in
- **TILTING** : 6/6° 6/5°, 3/3°
- **TIRE** : Cushion, Non marking
- **SEAT** : Pocket, Arm Rest, Hip Rest
- **M.C.V** : 4-Spool
- **ATTACH PIPING** : 3 Spool-piping, 4 Spool-piping
- **MASTER SWITCH**
- **BEACON LAMP**
- **HAZARD SWITCH**
- **WORK LAMP**


Designed for quick and easy service!

An ideal arrangement of component parts ensures easy access and convenience for maintenance.




Easy Change Air Cleaner

The air filter is readily accessible for cleaning or replacement. (6inch Cyclone Type)

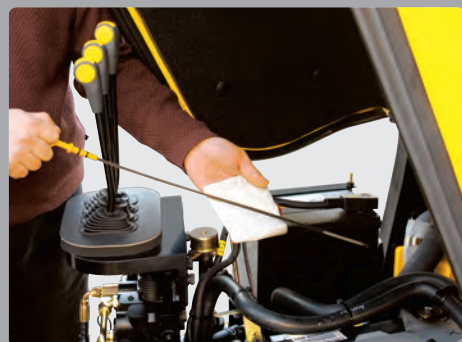

Fast Service Access for Daily Fluids Check



Rotating Battery Tray



One Touch, No Tool Floor Plate



Aluminum Radiator with Superb Protection Against Heat




Easy Access to Electric Parts

Various electric parts centralized in the dash board provide quick access for troubleshooting.



Easy Maintenance Oil Check

The T/M oil level can be checked easily without any disassembly.



Brake Fluid Reservoir With Level Switch

When the brake oil level become lower than Min. level, the warning lamp on the clusters comes on.




An Accessible, Compact Fuse Box for Easy Inspection



The new master on the job-site!

Smooth running, efficient and ergonomically designed, 15/18/20LC-7M series are made to meet your needs.

47HP/ 2,300rpm

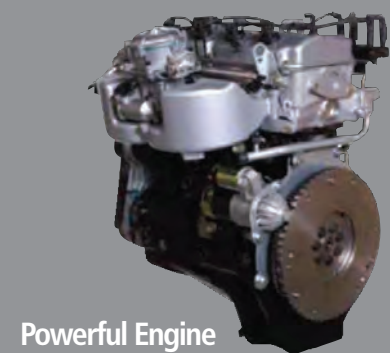

Powerful Engine MMC 2.0L Engine


Market approved quality of MMC 2.0L engine ensures incomparable performance, durability and additional value to the machine. This powerful and efficient engine provides excellent fuel economy and excellent torque for improved operation.(EPA/CARB Tier-IV Certified)

Fast and Stable Performance

Quick and responsive lift and tilt functions improve your productivity. When the truck is fully loaded, mast lowering speed is carefully controlled to ensure safety by the down control valve. Mast, Lift and Tilt Lock System is standard.



■ Some of the photos may include optional equipment.

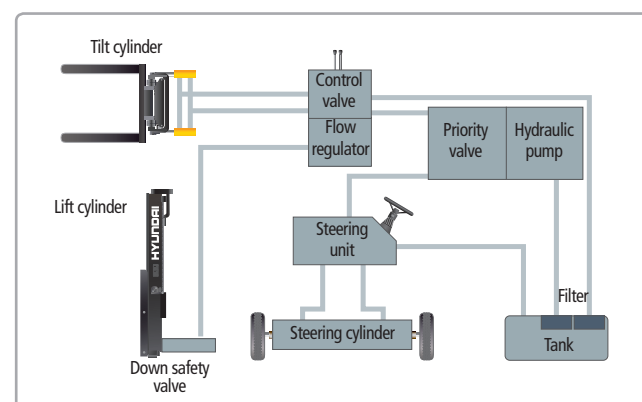

State-of-the-art Hydraulic System

The large-capacity hydraulic system responds quickly during operation, and a low-noise control valve increases both efficiency and durability.



Fully Hydrostatic Power Steering

The hydraulic steering system provides smooth and flexible steering, preventing overrun and kick-back.



Heavy Duty Single Unit Frame

Heavy duty single unit type frame, designed on the basis of accurate structural analysis, guarantees durability and safety.



Bright, Protected Headlights

Bright, Protected head lights are positioned for exceptional visibility.



Rear Safety Lamp

Rear combination lamps with turn signs, rear lights and brake lights are positioned for a high level of safety.

Built for safety and durability!

Safety and durability are priorities in design of the equipment.



Strong Overhead Guard
The safety overhead guard meets ISO 6055 regulation and protects the operator during hazardous jobs.



Parking Brake
Ratchet type parking brake is durable and easy for the operator to set.

Highly Durable Split type Drive Axle with Wet Disc Brakes

The optimized power transfer parts smoothly deliver desired torque to the drive wheels. Wet disc brakes are standard and provide long life with minimal maintenance required.



Large Footboard & Hand Grip
Wide "open" step offers convenience and safety when entering and exiting truck.



Expansion Bellows
The expansion bellows absorbs vibration and reduces noise generated from the exhaust system and also extends the life cycle of exhaust system.



Electrically Monitored Air Filter
Air cleaner sensor alerts the operator of a restricted air filter and allows replacement before damage.



Increased Mast Tilting Angle
Utilizing the mast tilting angle of 6 degrees forward and 8 degrees backward, the operator can safely and rapidly perform loading and unloading jobs.

Faster Travel Speed & Better Gradability

The powerful high-output engine provides greater acceleration, better gradability and faster travel speed on any tough terrains or slopes.



Gradability(Loaded)

- 15LC-7M: 37.1%
- 18LC-7M: 32.8%
- 20LC-7M: 30.6%

Travel Speed(Unloaded)

- 15LC-7M: 10.5 mph
- 18LC-7M: 10.5 mph
- 20LC-7M: 10.5 mph

High Power
Low Noise




Some of the photos may include optional equipment.

Ergonomic operator friendly compartment design!

Our design, based on human engineering, helps reduce fatigue and increase operator efficiency.

Operator Friendly Gauges and Water-resistant Monitor Panel

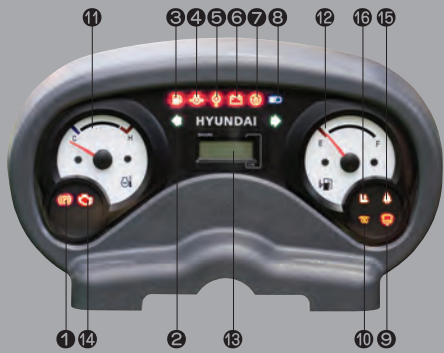

- 1 Parking brake lamp

2 Directional indicators

3 Fuel warning lamp

4 Engine oil warning lamp

5 Transmission oil temperature warning lamp
- 6 Battery charging warning lamp

7 Air cleaner filter warning light

8 Working light indicator

9 Water separator lamp

10 Pre-heater indicator

11 Water temperature gauge
- 12 Fuel gauge

13 Hour meter

14 Engine check lamp

15 Seat belt warning

16 OPS warning



Full Suspension Seat
The adjustable seat with armrests provides great comfort, safety and durability.



New High Visibility for Safe Operation
The operator is able to work with increased safety and accuracy due to a wide view through the mast, standard mirrors and spacious compartment.



■ Some of the photos may include optional equipment.

Travel Speed Control System (Option)



- ← Indoor : Customer Selection
- ← Outdoor : Max Vehicle Travel Speed



Ergonomically Positioned Pedals
Based on human engineering, the accelerator, brake and inching pedals are optimally positioned for convenience while operating the equipment.



Cup Holder & Console Box
Additional storage spaces are located inside the operating space for operator's convenience.



Quick Response of Operating Control Levers
Only minimal operator's effort is required for precise, safe and productive control.



Adjustable Steering Wheel
Steering wheel with horn button can be adjusted by a lever on the right-hand side for the most comfortable operator position.



Easy and Safe Shift Lever
A single lever on the left side of the steering column gives the operator fast, easy control of direction. The lever must be in the neutral position before the engine can be started.



Secondary Horn
Secondary Horn gives access to lights and horn