

Diesel Sit-Down Forklift

D-9 Series

35/40/45D-9, 50DA-9

8,000-11,000 lbs. capacities



HYUNDAI
MATERIAL HANDLING
NO ONE DELIVERS MORE

Get more of what you're looking for: THE 35, 40, 45D-9, 50DA-9 FROM HYUNDAI

When it comes to your toughest jobs you need a forklift that offers you more than just brute strength. The Hyundai 9 Series diesels are engineered to bring you outstanding performance matched with greater reliability and the durability to withstand even the most demanding environments. At the heart of the 9 Series is a powerful, proven Cummins engine that meets all EPA Tier 4 and EU Stage IV emissions regulations while delivering outstanding travel and lift/lower speeds.

But when you take a deeper dive into the 9 Series, you discover a machine built for greater operator comfort, simpler servicing, and maximum productivity and profitability in every application.



POWERFUL, PROVEN CUMMINS DIESEL

The 101 HP Cummins QSF3.8 turbocharged engine is built for power, reliability, and economy. Beyond low emissions, it delivers:

- High torque at low RPMs
- Outstanding gradeability
- Fast travel speeds up to 16.5 MPH
- Excellent fuel economy



SPACIOUS OPERATOR'S CABIN

Our deluxe cab provides more space for operators, with a low entrance height for easy entry and exit, outstanding visibility all around, plus:

- Grammer™ full suspension seat
- Low effort, quick response control levers
- Optimized pedal positions
- Adjustable, tilting steering wheel



ADVANCED, INFORMATION RICH CLUSTER

The dash display consolidates important equipment information, real-time data, onboard diagnostics, data logging, safety features, maintenance tracking and more for complete system control. All information is clearly displayed for easy reading by your operators and includes an optional weight indicator for added safety.



HYDROSTATIC POWER STEERING

The fully hydrostatic power steering provides smooth and precise handling and outstanding control.




MAINTENANCE MANAGEMENT

Displayed on the dash, this indicator alerts operators and technicians when maintenance items need to be replaced before a possible failure.



RUGGED DRIVE AXLE

Designed to withstand years of punishing service, the drive axle includes an innovative ring gear that reduces noise and virtually maintenance-free wet disc brakes for more consistent braking. The drive axle is paired with a durable, smooth shifting transmission that offers reduced vibration with less maintenance.

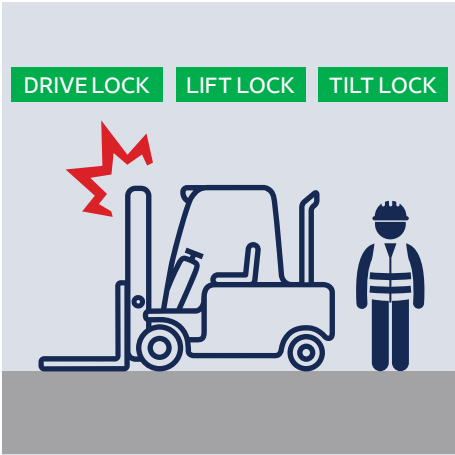

OPERATOR PRESENCE SENSING SYSTEM

For maximum safety, the 9 Series features an advanced Operator Presence Sensing System that requires the operator to be in the seat to have the use of the travel and hydraulic functions, including tilt, lift and lower. Another key safety feature is an overhead guard that exceeds CEE and ANSI regulations.

The 9 Series brings you even more advantages.

- An easy lifting hood reveals a large workspace for faster, easier servicing and reduced downtime
- Maximum speed limit function allows operators to set safe speed limits without affecting lift speeds and acceleration
- Optional load weight indicator provides a digital readout of the load weight and warns if the maximum capacity is reached
- Halogen headlights and rear LED lights offer superior illumination of the workplace for added safety
- Machine inclination warning system provides grade and slope status information for greater operating safety
- Standard panoramic mirror package expands the driver's view when backing up
- Password setting function prevents unauthorized use and theft
- Optional rear-view camera and monitor helps ensure a safer working environment
- Down safety valve prevents forks from dropping in the event of damage to the hydraulic line
- Standard rear tire cover protects the radiator and other key components from damage caused by foreign materials

ONLY HYUNDAI OFFERS YOU SUCH A COMPREHENSIVE,
FULLY INTEGRATED TELEMATICS SYSTEM.

HiMATE



HI-MATE MANAGEMENT SYSTEM

Hi-Mate is one of the industry’s most advanced remote management system. With continuous data collection, Hi-Mate delivers more communication, control, and ability to track, monitor, maintain, and manage your forklift fleet. It is the proven way to efficiently coordinate both your equipment and human resources.

Hi-Mate works by collecting key data from sensors mounted to your equipment that track operation of the forklift, relaying that information to your computer or mobile device in real time. By monitoring key components, such as the engine, electric system, and hydraulics, Hi-Mate can help you evaluate machine and operator performance, create preventive maintenance programs, and help you minimize downtime as you maximize productivity.

Equipment operation management

Real-time monitoring and follow-up management of individual pieces of equipment or equipment fleet deliver essential operational status and information, including:

- Key-on time, travel hours, work hours, and GPS location

Equipment status management

Vital diagnostic and maintenance data is relayed as alerts, while Hi-Mate Premium provides tracking of pre-shift checklists to help reduce downtime and ensure OSHA compliance:

- Alerts are sent for DTCs, system warning, and required maintenance

Safe traveling control

An impact monitor provides alerts, accountability, and follow-up management of safety incidents involving equipment during operation:


- The system logs the number and severity of impacts as well as the operator who was logged into the unit at the time of the incident

Human resource management


Hi-Mate Premium can control who operates equipment via a pin pad and RFID reader:

- Provided information can be used to evaluate productivity, efficiency, and workforce safety
- Tracking the weight load indicator captures operator productivity

Data Flow

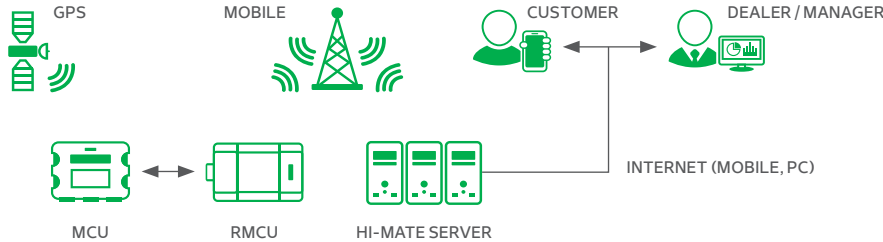

Dimensions

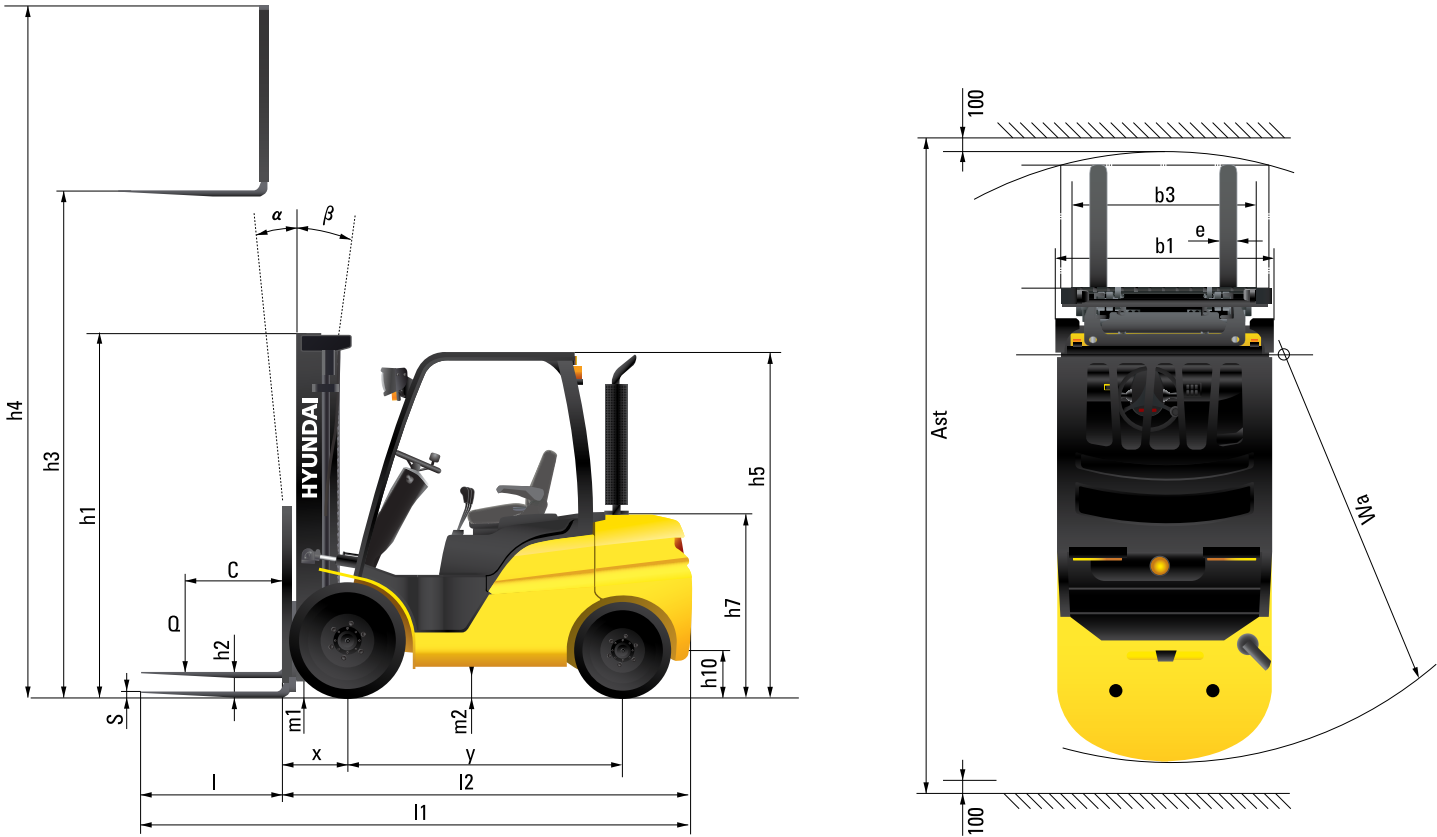

Specifications

Identification						
1.1	Manufacturer		Hyundai			
1.2	Manufacturer's Type Designation		35D-9	40D-9	45D-9	50DA-9
1.3	Drive: Electric (Battery or Mains), Diesel, Petrol, Fuel Gas, Manual		Diesel	Diesel	Diesel	Diesel
1.4	Type of Operation : Hand, Pedestrian, Standing, Seated, Order-Picker		Seated	Seated	Seated	Seated
1.5	Load Capacity / Rated Load	Q	lb	8,000	9,000	10,000
1.6	Load Center Distance	c	in	24	24	24
1.8	Load Distance, Center of Front Axle to Fork	x	in	22	22	22
1.9	Wheelbase	y	in	78.8	78.8	78.8
Weights						
2.1	Service Weight		lb	13,082.23	14,294.7	15,211.9
2.2	Axle Loading, Loaded Front/Rear		lb	17,947.8 / 2,850.5	20,077.5 / 3,033.5	21,805.9 / 3,326.7
2.3	Axle Loading, Unloaded Front/Rear		lb	5,756.3 / 7,325.9	6,144.2 / 8,148.2	6,131 / 9,080.8
Wheels, Chassis						
3.1	Tires			Pneumatic	Pneumatic	Pneumatic
3.2	Tires Size, Front (ø x Width)	Single		8.25 x 15 x 14PR	300 x 15 x 18PR	300 x 15 x 18PR
		Double		7.5 x 16 x 12PR	7.5 x 16 x 12PR	7.5 x 16 x 12PR
3.3	Tires Size, Rear (ø x Width)			7 x 12 x 14PR	7 x 12 x 14PR	7 x 12 x 14PR
3.4	Wheels, Number Front Rear (x=Driven Wheels)			2 x 2	4 x 2	4 x 2
3.6	Track Width, Front	Single	In	44.5	44	44
		Double	in	50.4	50.4	50.4
3.7	Track Width, Rear		in	44.9	44.8	44.8
Basic Dimensions						
4.1	Mast/Fork Carriage Tilt Forward / Backward		deg	8 / 10	8 / 10	8 / 10
4.2	Lowered Mast Height	h1	In	87.9	87.4	87.4
4.3	Free Lift	h2	In	4.7	4.7	4.7
4.4	Lift Height	h3	In	118.8	118.8	118.8
4.5	Extended Mast Height	h4	In	166.6	166.6	166.6
4.7	Overhead Load Guard (Cab) Height	h5	In	92.52 (92.91)	92.13 (92.52)	92.13 (92.52)
4.8	Seat Height / Standing Height	h7	In	51.6	51.1	51.1
4.12	Coupling Height	h10	In	14.8	14.8	14.9
4.19	Overall Length	l1	in	169	169	176.5
4.20	Length to Face of Forks	l2	In	127	127	128.6
4.21	Overall Width	Single	b1	in	53.9	55.8
		Double	b1	in	68.7	68.7
4.22	Fork Dimensions / Hook Type	L x W x H	in	42 x 4.8 x 2	42 x 4.8 x 2	48 x 5.9 x 1.9
4.23	Fork Carriage ISO 2328, Class / Type A,B			III / A	III / A	IV / A
4.24	Fork-Carriage Width	b3	in	51.1	62.9	62.9
4.31	Ground Clearance, Loaded, Under Mast	m1	in	6.7	6.1	6.1
4.32	Ground Clearance, Center of Wheelbase	m2	In	6.4	6.2	6.1
4.33	Aisle Width for Pallets 39.3 x 47.2 Crossways	Ast	in	185.4	185.4	187
4.34	Aisle Width for Pallets 31.5 x 47.2 Lengthways	Ast	in	193.3	193.3	194.9
4.35	Turning Radius	Wa	in	116.1	116.1	117.7
4.36	Smallest Pivot Point Distance		in	39.7	39.7	39.7
Performance Data						
5.1	Travel Speed, Loaded / Unloaded (80v)		mph	15.3 / 16.6	15.1 / 16	15 / 15.9
5.2	Lift Speed, Loaded / Unloaded (80v)		fpm	100 / 106	98 / 106	96 / 106
5.3	Lowering Speed, Loaded / Unloaded		fpm	99 / 89	98 / 106	99 / 99
5.6	Max. Drawbar Pull, Loaded / Unloaded		lbf	8,751 / 8,295	8,806 / 8,566	8,818 / 8,547
5.7	Max. Gradeability, Loaded / Unloaded		%	40.9 / 24	36.4 / 23.6	33.2 / 22.1
5.10	Service Brake			Hydraulic	Hydraulic	Hydraulic
Engine						
6.1	Engine Manufacturer / Type			CUMMINS QSF3.8	CUMMINS QSF3.8	CUMMINS QSF3.8
6.2	Engine Power Acc. to ISO 1585		hp / rpm	100.6 / 2,200	100.6 / 2,200	100.6 / 2,200
6.3	Maximum Torque		lbf / rpm	306 / 1,600	306 / 1,600	306 / 1,600
6.4	Number of Cylinders / Displacement		EA/cc	4 / 3,726	4 / 3,726	4 / 3,726
Additional Data						
8.1	Type of Drive Control			Power Shift 2/2	Power Shift 2/2	Power Shift 2/2
8.2	Operating Pressure, System / Attachments		psi	3,000 / 2,130	3,000 / 2,130	3,000 / 2,130
8.3	Oil volume for attachments		gpm	20	20	20

*All specifications in this catalog are subject to change according to the optional items.


35D-9														
Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free Lift Height		Mast Tilt Angle		Load capacity w/o Sideshift		Load capacity with Sideshift		Truck Weight (Unloaded)	
					Without Load Backrest	With Load Backrest	Fwd	Bwd	Single Tire	Dual tire	Single Tire	Dual Tire	Single Tire	Dual Tire
			in	Single Tire	Dual Tire	in	in	deg	deg	lb	lb	lb	lb	lb
2-Stage Limited Free Li ft	V270	107.1	82.1	81.5	4.7	4.7	8	10	8,000	8,000	8,000	8,000	12,901	13,229
	V300*	118.9	88.0	87.4	4.7	4.7	8	10	8,000	8,000	8,000	8,000	12,967	13,295
	V330	130.7	93.9	93.3	4.7	4.7	8	10	8,000	8,000	8,000	8,000	13,050	13,378
	V350	138.6	99.8	99.2	4.7	4.7	8	10	8,000	8,000	8,000	8,000	13,101	13,429
	V370	146.5	103.7	103.1	4.7	4.7	8	10	8,000	8,000	8,000	8,000	13,145	13,473
	V400	158.3	112.0	111.4	4.7	4.7	8	10	8,000	8,000	7,480	7,590	13,237	13,565
	V430	170.1	117.9	117.3	4.7	4.7	8	10	8,000	8,000	7,370	7,480	13,303	13,631
	V450	178.0	121.9	121.3	4.7	4.7	8	6	8,000	8,000	7,260	7,370	13,486	13,814
	V500	197.6	131.7	131.1	4.7	4.7	8	6	7,480	8,000	7,040	7,150	13,598	13,926
2-Stage Full Free Lift	VF280	110.4	84.1	83.5	49.5	36.7	8	8	8,000	8,000	8,000	8,000	13,028	13,361
	VF300	118.3	88.0	87.4	53.5	40.6	8	8	8,000	8,000	8,000	8,000	13,086	13,418
	VF315	124.2	91.5	90.9	57.0	44.1	8	8	8,000	8,000	8,000	8,000	13,127	13,462
3-Stage Full Free Lift	TF/TS370	146.9	80.1	79.5	45.2	32.4	8	8	8,000	8,000	7,370	7,590	13,438	13,765
	TF/TS400	158.7	84.1	83.5	49.2	36.3	8	8	8,000	8,000	7,260	7,480	13,504	13,831
	TF/TS430	170.5	88.0	87.4	53.1	40.2	8	8	8,000	8,000	7,150	7,370	13,631	13,900
	TF/TS450	177.6	90.4	90.2	55.5	42.6	8	8	8,000	8,000	7,040	7,260	13,614	13,941
	TF/TS470	185.8	93.9	94.1	59.0	46.1	8	8	7,480	8,000	6,930	7,150	13,693	14,021
	TF/TS500	197.6	97.8	97.2	63.0	50.1	8	6	7,260	7,480	6,820	7,040	13,743	14,071
	TF/TS550	217.3	104.9	104.3	70.0	57.2	8	6	7,040	7,260	6,270	6,820	13,880	14,208
	TF/TS600	237.4	112.0	111.4	77.1	64.3	8	6	6,820	7,040	5,390	6,600	13,963	14,351
	TF/TS650	257.5	119.1	118.5	84.2	71.3	8	6	6,600	6,600	5,170	6,380	14,214	14,542

45D-9														
Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free Lift Height		Mast Tilt Angle		Load capacity w/o Sideshift		Load capacity with Sideshift		Truck Weight (Unloaded)	
					Without Load Backrest	With Load Backrest	Fwd	Bwd	Single Tire	Dual tire	Single Tire	Dual Tire	Single Tire	Dual Tire
									24 in LC	24 in LC	24 in LC	24 in LC		
		in	Single Tire	Dual Tire	in	in	deg	deg	lb	lb	lb	lb	lb	lb
2-Stage Limited Free Lift	V270	107.1	82.1	81.5	4.7	4.7	8	10	10,000	10,000	10,000	10,000	14,744	15,101
	V300*	118.9	88.0	87.4	4.7	4.7	8	10	10,000	10,000	10,000	10,000	14,810	15,167
	V330	130.7	93.9	93.3	4.7	4.7	8	10	10,000	10,000	10,000	10,000	14,894	15,250
	V350	138.6	99.8	99.2	4.7	4.7	8	10	10,000	10,000	10,000	10,000	14,945	15,301
	V370	146.5	103.7	103.1	4.7	4.7	8	10	10,000	10,000	9,680	9,680	14,989	15,345
	V400	158.3	112.0	111.4	4.7	4.7	8	10	10,000	10,000	9,570	9,570	15,081	15,437
	V430	170.1	117.9	117.3	4.7	4.7	8	10	10,000	10,000	9,460	9,460	15,147	15,503
	V450	178.0	121.9	121.3	4.7	4.7	8	6	10,000	10,000	9,240	9,240	15,330	15,686
	V500	197.6	131.7	131.1	4.7	4.7	8	6	9,680	9,680	8,910	8,910	15,442	15,798
2-Stage Full Free Lift	VF280	110.4	84.1	83.5	56.8	33.6	8	8	10,000	10,000	10,000	10,000	14,826	15,125
	VF300	118.3	88.0	87.4	60.7	37.5	8	8	10,000	10,000	10,000	10,000	14,883	15,182
	VF315	124.2	91.5	90.9	63.1	41.1	8	8	10,000	10,000	10,000	10,000	14,925	15,224
3-Stage Full Free Lift	TF/TS370	146.9	80.1	79.5	43.9	31.3	8	8	10,000	10,000	9,570	9,570	15,248	15,547
	TF/TS400	158.7	84.1	83.5	47.8	35.3	8	8	10,000	10,000	9,460	9,460	15,314	15,613
	TF/TS430	170.5	88.0	87.4	51.7	39.2	8	8	10,000	10,000	9,240	9,240	15,382	15,682
	TF/TS450	177.6	90.4	89.8	54.1	41.6	8	8	10,000	10,000	9,130	9,130	15,424	15,723
	TF/TS470	185.8	93.9	93.3	58.4	45.1	8	8	9,680	9,680	9,020	9,020	15,503	15,803
	TF/TS500	197.6	97.8	97.2	61.6	49.1	8	6	9,460	9,460	8,800	8,800	15,554	15,853
	TF/TS550	217.3	104.9	104.3	68.7	56.1	8	6	9,240	9,240	8,470	8,470	15,690	15,990
	TF/TS600	237.4	112.0	111.4	75.7	63.2	8	6	8,800	8,800	7,150	8,250	15,833	16,133
	TF/TS650	257.5	119.1	118.5	82.8	70.3	8	6	8,580	8,580	6,930	8,030	16,025	16,324

40D-9														
Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free Lift Height		Mast Tilt Angle		Load capacity w/o Sideshift		Load capacity with Sideshift		Truck Weight (Unloaded)	
					Without Load Backrest	With Load Backrest	Fwd	Bwd	Single Tire	Dual tire	Single Tire	Dual Tire	Single Tire	Dual Tire
									24 in LC	24 in LC	24 in LC	24 in LC	Single Tire	Dual Tire
		in	Single Tire	Dual Tire	in	in	deg	deg	lb	lb	lb	lb	lb	lb
2-Stage Limited Free Lift	V270	107.1	82.1	81.5	4.7	4.7	8	10	9,000	9,000	9,000	9,000	13,842	14,098
	V300*	118.9	88.0	87.4	4.7	4.7	8	10	9,000	9,000	9,000	9,000	13,908	14,164
	V330	130.7	93.9	93.3	4.7	4.7	8	10	9,000	9,000	9,000	9,000	13,992	14,247
	V350	138.6	99.8	99.2	4.7	4.7	8	10	9,000	9,000	9,000	9,000	14,043	14,298
	V370	146.5	103.7	103.1	4.7	4.7	8	10	9,000	9,000	8,888	8,888	14,087	14,342
	V400	158.3	112.0	111.4	4.7	4.7	8	10	9,000	9,000	8,775	8,775	14,181	14,436
	V430	170.1	117.9	117.3	4.7	4.7	8	10	9,000	9,000	8,663	8,663	14,245	14,500
	V450	178.0	121.9	121.3	4.7	4.7	8	6	9,000	9,000	8,550	8,550	14,428	14,683
	V500	197.6	131.7	131.1	4.7	4.7	8	6	8,775	9,000	8,325	8,325	14,540	14,795
2-Stage Full Free Lift	VF280	110.4	84.1	83.5	48.9	36.1	8	8	9,000	9,000	9,000	9,000	13,970	14,181
	VF300	118.3	88.0	87.4	52.9	40.0	8	8	9,000	9,000	9,000	9,000	14,027	14,238
	VF315	124.2	91.5	90.9	56.4	43.5	8	8	9,000	9,000	9,000	9,000	14,069	14,280
3-Stage Full Free Lift	TF/TS370	146.9	80.1	79.5	44.6	31.8	8	8	9,000	9,000	8,775	8,888	14,379	14,509
	TF/TS400	158.7	84.1	83.5	48.6	35.7	8	8	9,000	9,000	8,663	8,663	14,445	14,575
	TF/TS430	170.5	88.0	87.4	52.5	39.6	8	8	9,000	9,000	8,550	8,550	14,513	14,643
	TF/TS450	177.6	90.4	90.2	54.9	42.0	8	8	9,000	9,000	8,550	8,550	14,555	14,685
	TF/TS470	185.8	93.9	94.1	58.4	45.6	8	8	9,000	9,000	8,325	8,438	14,637	14,764
	TF/TS500	197.6	97.8	97.2	62.4	49.5	8	6	8,775	8,775	8,100	8,213	14,687	14,815
	TF/TS550	217.3	104.9	104.3	69.4	56.6	8	6	8,325	8,550	7,370	7,700	14,821	14,951
	TF/TS600	237.4	112.0	111.4	76.5	63.7	8	6	7,920	7,920	6,490	7,480	14,967	15,094
	TF/TS650	257.5	119.1	118.5	83.6	70.7	8	6	7,700	7,700	6,270	7,260	15,156	15,286

50DA-9														
Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free Lift Height		Mast Tilt Angle		Load capacity w/o Sideshift		Load capacity with Sideshift		Truck Weight (Unloaded)	
					Without Load Backrest	With Load Backrest	Fwd	Bwd	Single Tire	Dual tire	Single Tire	Dual Tire	Single Tire	Dual Tire
									24 in LC	24 in LC	24 in LC	24 in LC	24 in LC	24 in LC
		in	Single Tire	Dual Tire	in	in	deg	deg	lb	lb	lb	lb	lb	lb
2-Stage Limited Free Lift	V260	103.5	82.1	81.5	4.7	4.7	8	10	11,000	11,000	11,000	11,000	15,734	16,001
	V290*	115.4	88.0	87.4	4.7	4.7	8	10	11,000	11,000	11,000	11,000	15,789	16,056
	V320	127.2	93.9	93.3	4.7	4.7	8	10	11,000	11,000	11,000	11,000	15,844	16,111
	V340	135.0	99.8	99.2	4.7	4.7	8	10	11,000	11,000	10,890	10,890	15,899	16,166
	V360	142.9	103.7	103.1	4.7	4.7	8	10	11,000	11,000	10,780	10,780	15,935	16,201
	V390	154.7	112.0	111.4	4.7	4.7	8	10	11,000	11,000	10,560	10,560	16,014	16,280
	V440	174.4	121.9	121.3	4.7	4.7	8	6	10,780	11,000	10,230	10,230	16,240	16,599
	V490	194.1	131.7	131.1	4.7	4.7	8	6	10,560	10,780	9,900	9,900	16,333	15,686
2-Stage Full Free Lift	VF270	106.4	84.1	83.5	48.1	35.6	8	8	11,000	11,000	10,340	10,450	15,657	15,924
	VF290	114.3	88.0	87.4	52.1	39.6	8	8	11,000	11,000	10,230	10,340	15,715	15,981
	VF305	120.2	91.5	90.9	55.6	43.1	8	8	11,000	11,000	10,010	10,120	15,756	16,023
3-Stage Full FreeLift	TF/TS360	144.6	80.1	79.5	42.3	31.8	8	8	11,000	11,000	10,340	10,560	16,166	16,432
	TF/TS390	156.4	84.1	83.5	46.2	35.7	8	8	11,000	11,000	10,230	10,340	16,222	16,489
	TF/TS420	168.2	88.0	87.4	50.2	39.6	8	8	10,780	11,000	10,010	10,120	16,278	16,544
	TF/TS440	175.3	90.4	89.8	52.5	42.0	8	8	10,560	11,000	9,900	10,010	16,313	16,579
	TF/TS460	183.5	93.9	93.3	56.1	45.5	8	8	10,340	10,780	9,790	9,900	16,366	16,632
	TF/TS490	195.4	97.8	97.2	60.0	49.5	8	6	10,120	10,560	9,570	9,790	16,421	16,687
	TF/TS540	215.0	104.9	104.3	67.1	56.6	8	6	9,900	10,340	9,350	9,460	16,535	16,801
	TF/TS590	235.1	112.0	111.4	74.2	63.6	8	6	9,680	10,120	9,020	9,240	16,623	16,889
	TF/TS640	255.2	119.1	118.5	81.3	70.7	8	6	9,460	9,900	8,800	9,020	16,812	17,079

Load Capacity

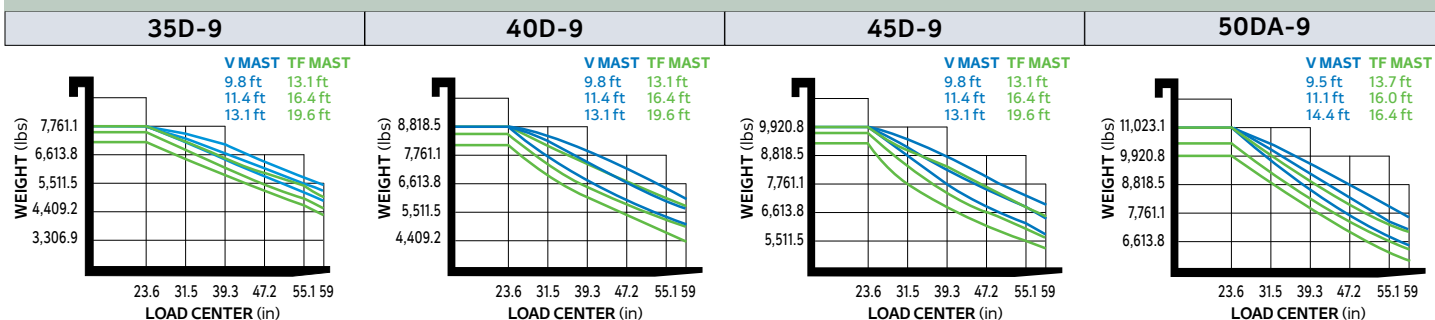

35/40/45D-9, 50DA-9 Series Options

ENGINE		
	STD	OPT
CUMMINS QSF 3.8 Engine	●	
EGR (exhaust gas recirculation)	●	
SCR (selective catalyst reduction)	●	
POWER DRIVE		
Clutch Protection System	●	
Drive Axle	●	
Fully Hydrostatic Power Steering	●	
Wet Disk Brakes	●	
LOAD HANDLING		
2-Stage Wide View Mast		●
2-Stage Full Free Mast		●
3-Stage Full Free Mast		●
3-Spool/Lever Main Control Valve (option: up to 5 spool/lever)	●	
Integrated Side Shifter		●
Hook-On Side Shifter		●
Synchronized Fork-Positioner		●
Independent Fork-Positioner		●
Auto Fork Leveling System	●	
Load Sensing & Indicator	●	
Wide Type Carriage (for double tires)		●
Carriage Backrest		●
LOAD SENSING & INDICATOR		
HAC (hillstart-assistance control)		●
Fork Safety System (preventing sudden drop)	●	
Truck Inclination Warning System	●	
OPSS (operator presence sensing system)	●	
Password Starting System	●	
Maximum Speed Limit System	●	
Back-Up Alarm	●	
Rear View Camera		●

BODY		
	STD	OPT
Press Type Overhead Guard	●	
Flat Bar Type Overhead Guard		●
O.h.g with Raincover		●
Cabin		●
Cabin with Heater and Air-Conditioner		●
5.6" LCD Monitor	●	
Grammer Seat	●	
Grammer Full Suspension Seat		●
Belly Pan - Under Cover		●
Belly Pan - Rear Tire Mud Cover		●
Pneumatic Single Tire	●	
Solid Single Tire		●
Non-Marking Single Tire		●
Brake Booster	●	
Pre-Cleaner	●	
Panoramic Mirror	●	
Side Mirror		●
Tilt Steering Column	●	
Parking Brake Switch	●	
Rear Handle with Horn		●
Horn&Directional Switch		●
Explosion Proof		●
Oil for Special Environment (hot/cold weather)		●
Master Switch	●	
LIGHTS AND LAMPS		
Halogen Head Lights	●	
LED Rear Combination Lamps	●	
Turn Signal Lights	●	
Rear Reflectors	●	
Beacon Lamp (bulb or LED)		●

**NO ONE
DELIVERS MORE**



HD HYUNDAI
XITESOLUTION | MATERIAL HANDLING

6100 Atlantic Blvd.
Norcross, GA 30071
hyundaimaterialhandling.com

678-823-7777