

Electric Sit-Down Forklift

# B-9 Series

40/45/50B-9

8,000-10,000 lbs. capacities



**HYUNDAI**  
MATERIAL HANDLING  
NO ONE DELIVERS MORE

Get more of what you're looking for:  
**THE B-9 FROM HYUNDAI**

The Hyundai B-9 Series of electric forklifts has been designed to increase your productivity and your operation's profitability through a combination of innovative features, greater operator comfort, simplified maintenance, durable construction, and enhanced reliability. With its powerful dual drive motor and outstanding gradeability, it offers an environmentally friendly alternative to IC-powered forklifts and can tackle your toughest jobs indoors and out.

But that's only the beginning of all that a B-9 offers. Just consider some of the key features and benefits you'll find, and you'll understand why we say that **No One Delivers More** than Hyundai.



**MULTIFUNCTION CLUSTER OPTIMIZES PERFORMANCE**

This advanced digital system displays essential operational information in real time. It also includes buttons for easy setting of travel speed and most operating speeds to match work conditions. You'll find innovations everywhere

- Onboard diagnostics, data logging, safety features, and maintenance tracking keep operators and technicians fully informed
- Speed, direction and operating hours are clearly shown
- Load weight indicator with overload warning system



**POWERFUL, LOW MAINTENANCE DUAL DRIVE MOTOR**

The reliable AC system delivers optimum performance in all kinds of environments, over uneven and wet pavements, as well as an outstanding gradeability range from 22-25% with a max speed of 10.6 MPH. Other features include:

- Curve control that limits travel speed giving the operators greater confidence navigating the workplace
- Optional auto fork leveling to protect loads
- Optimized lift cylinder arrangement for greater visibility
- Enhanced brake oil reservoir with an electronic level sensor



**SPACIOUS OPERATOR COMPARTMENT**

The roomy, comfortable operator's compartment is designed for more precise handling and reduced operator fatigue. It includes a standard Grammer™ full suspension seat that adjusts to the operator's body weight and adjustable armrests and lumbar support. There is also a fully adjustable steering wheel, optimized pedal position, and large entrance step.




**EASY BATTERY REPLACEMENT**

The B-9 Series is engineered to reduce downtime and simplify maintenance. Battery replacement is quick and easy through the side of the forklift without the need for expensive equipment like a crane. There is also easy access to key components. For example, no tools are required to access the AC controller which is conveniently located for any required servicing.



**HIGH PERFORMANCE LI-ION BATTERY**

The optional Li-ion battery features rapid charging in just 2 hours and delivers outstanding performance with a low cost of ownership. It requires no daily maintenance and eliminates the need to swap batteries at shift changes. It offers up to 15% savings on electric bills, while delivering fast lift and travel speeds. All without the harmful emissions of lead acid batteries.

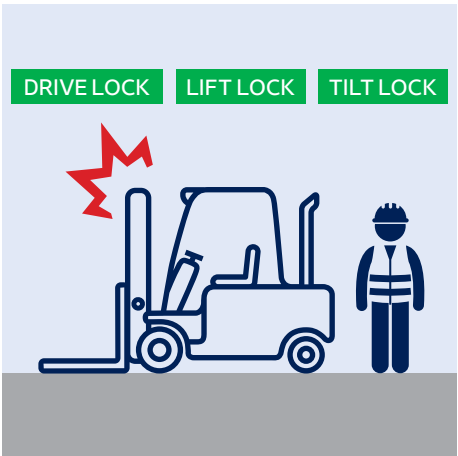

**OPERATOR PRESENCE SAFETY SYSTEM (OPSS)**

The OPSS requires operators to be present, in their seats, to have use of the travel and lifting and tilting functions. Together, with its outstanding visibility, curve control and hill assist control, the B-9 Series offers a comprehensive safety package to protect operators, employees working around your forklifts, the machine itself, your inventory and facility.

**The B -9 Series brings you even more advantages.**

- Optional hill assist control to prevent the machine from rolling back after coming to a stop on inclines or declines
- Strong overhead guard exceeds CEE and ANSI regulations
- Outstanding lighting package includes LED combination lights and halogen headlines
- Fork safety features, including a down-control valve that maintains a controlled lowering speed and a down-safety valve that prevents forks from suddenly dropping if the hydraulic line is damaged
- Panoramic mirror that expands the driver's view during operation
- Performance modes set on the cluster, including High, Normal, Economic, and Turtle modes
- Full compatibility with Hyundai's exclusive Hi-Mate remote management system



ONLY HYUNDAI OFFERS YOU SUCH A COMPREHENSIVE,  
FULLY INTEGRATED TELEMATICS SYSTEM.

HiMATE



HI-MATE MANAGEMENT SYSTEM

Hi-Mate is one of the industry’s most advanced remote management system. With continuous data collection, Hi-Mate delivers more communication, control, and ability to track, monitor, maintain, and manage your forklift fleet. It is the proven way to efficiently coordinate both your equipment and human resources.

Hi-Mate works by collecting key data from sensors mounted to your equipment that track operation of the forklift, relaying that information to your computer or mobile device in real time. By monitoring key components, such as the engine, electric system, and hydraulics, Hi-Mate can help you evaluate machine and operator performance, create preventive maintenance programs, and help you minimize downtime as you maximize productivity.



**Equipment operation management**

Real-time monitoring and follow-up management of individual pieces of equipment or equipment fleet deliver essential operational status and information, including:

- Key-on time, travel hours, work hours, and GPS location



**Equipment status management**

Vital diagnostic and maintenance data is relayed as alerts, while Hi-Mate Premium provides tracking of pre-shift checklists to help reduce downtime and ensure OSHA compliance:

- Alerts are sent for DTCs, system warning, and required maintenance



**Safe traveling control**

An impact monitor provides alerts, accountability, and follow-up management of safety incidents involving equipment during operation:

- The system logs the number and severity of impacts as well as the operator who was logged into the unit at the time of the incident




**Human resource management**



Hi-Mate Premium can control who operates equipment via a pin pad and RFID reader:

- Provided information can be used to evaluate productivity, efficiency, and workforce safety
- Tracking the weight load indicator captures operator productivity

Data Flow

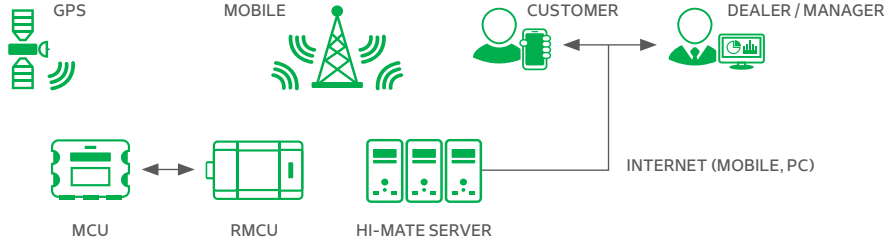

Dimensions

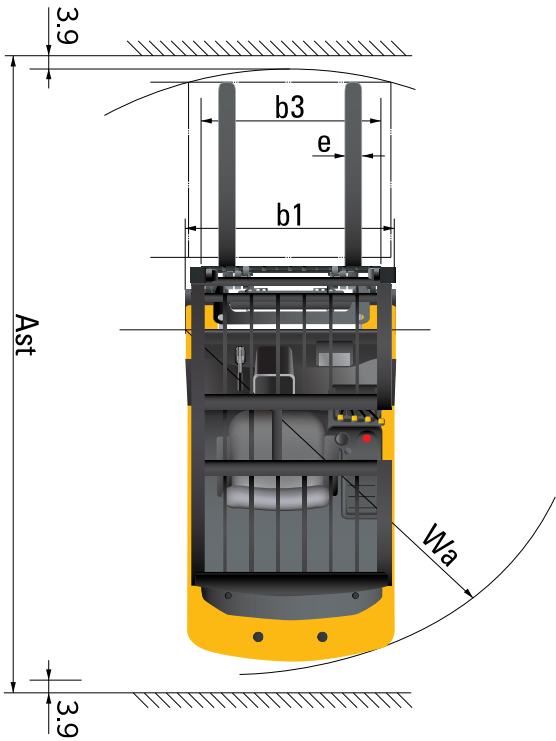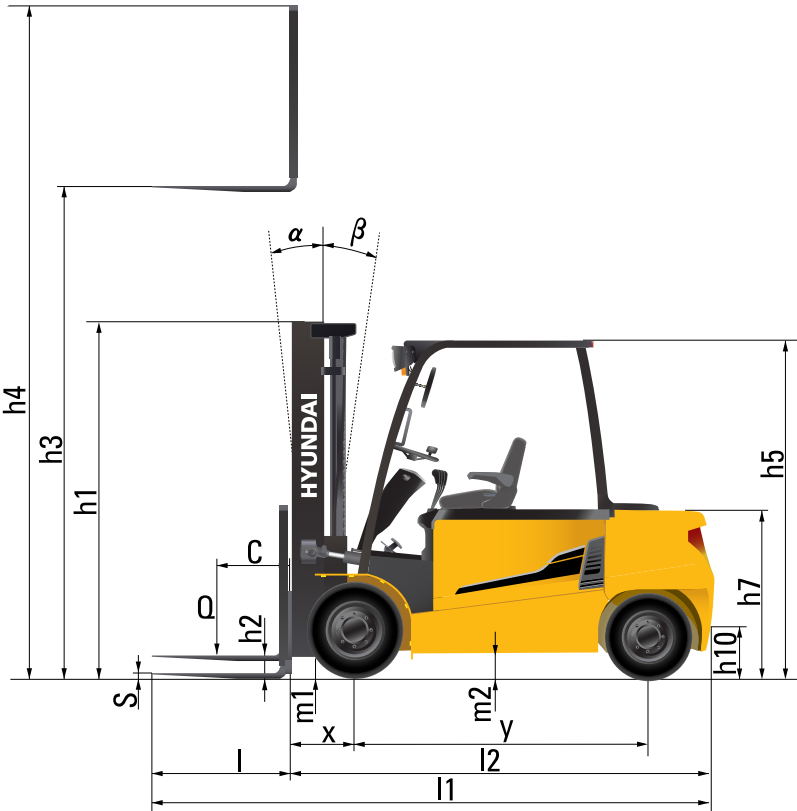

Specifications

| Identification   |                                                                          |           |     |                      |                      |
|------------------|--------------------------------------------------------------------------|-----------|-----|----------------------|----------------------|
| 1.1              | Manufacturer                                                             |           |     | Hyundai              |                      |
| 1.2              | Manufacturer's Type Designation                                          |           |     | 40B-9                | 50B-9                |
| 1.3              | Drive: Electric (Battery or Mains), Diesel, Petrol, Fuel Gas, Manual     |           |     | Electric             | Electric             |
| 1.4              | Type of Operation : Hand, Pedestrian, Standing, Seated, Order-Picker     |           |     | Seated               | Seated               |
| 1.5              | Load Capacity / Rated Load                                               | Q         | lb  | 9,000                | 10,000               |
| 1.6              | Load Center Distance                                                     | c         | in  | 19.68                | 19.68                |
| 1.8              | Load Distance, Center of Front Axle to Fork                              | x         | in  | 24                   | 24                   |
| 1.9              | Wheelbase                                                                | y         | in  | 79.72                | 79.72                |
| Weights          |                                                                          |           |     |                      |                      |
| 2.1              | Service Weight                                                           |           | lb  | 15,112.69            | 16,192.95            |
| 2.2              | Axle Loading, Loaded Front/Rear                                          |           | lb  | 21,049.74 / 2,881.44 | 23,051.53 / 3,062.22 |
| 2.3              | Axle Loading, Unloaded Front/Rear                                        |           | lb  | 7,725 / 7,387.69     | 8,060.1 / 8,132.85   |
| Wheels, Chassis  |                                                                          |           |     |                      |                      |
| 3.1              | Tires: Solid Rubber(V), Superelastic(SE), Pneumatic(P), Polyurethane(PE) |           |     | SE, P                | SE, P                |
| 3.2              | Tires Size, Front (ø x Width)                                            |           |     | 250-15               | 250-15               |
| 3.3              | Tires Size, Rear (ø x Width)                                             |           |     | 23×9-10              | 23×9-10              |
| 3.5              | Wheels, Number Front Rear (x=Driven Wheels)                              |           |     | 2×/2                 | 2×/2                 |
| 3.6              | Track Width, Front                                                       | b10       | in  | 44.9                 | 44.9                 |
| 3.7              | Track Width, Rear                                                        | b11       | in  | 43.2                 | 43.2                 |
| Basic Dimensions |                                                                          |           |     |                      |                      |
| 4.1              | Mast/Fork Carriage Tilt Forward / Backward                               |           | deg | 6/10                 | 6/10                 |
| 4.2              | Lowered Mast Height                                                      | h1        | In  | 87.6                 | 87.6                 |
| 4.3              | Free Lift                                                                | h2        | In  | 4.72                 | 4.72                 |
| 4.4              | Lift Height                                                              | h3        | In  | 118.89               | 118.89               |
| 4.5              | Extended Mast Height                                                     | h4        | In  | 166.29               | 166.29               |
| 4.7              | Overhead Load Guard (Cab) Height                                         | h5        | In  | 91.33                | 91.33                |
| 4.8              | Seat Height / Standing Height                                            | h7        | In  | 50.6                 | 50.6                 |
| 4.12             | Coupling Height                                                          | h10       | In  | 18.11                | 18.11                |
| 4.19             | Overall Length                                                           | l1        | in  | 165.94               | 165.94               |
| 4.20             | Length to Face of Forks                                                  | l2        | In  | 117.91               | 117.91               |
| 4.21             | Overall Width                                                            | b1        | in  | 54.17                | 54.17                |
| 4.22             | Fork Dimensions                                                          | L x W x H | in  | 42 × 5 × 2           | 42 × 5 × 2           |
| 4.23             | Fork Carriage ISO 2328, Class / Type A,B                                 |           |     | III /A               | III /A               |
| 4.24             | Fork-Carriage Width                                                      | b3        | in  | 54.17                | 54.17                |
| 4.31             | Ground Clearance, Loaded, Under Mast                                     | m1        | in  | 6.29                 | 6.29                 |
| 4.32             | Ground Clearance, Center of Wheelbase                                    | m2        | In  | 5.9                  | 5.9                  |
| 4.33             | Aisle Width for Pallets 1000x1200 Crossways                              | Ast       | in  | 173.42               | 173.42               |
| 4.34             | Aisle Width for Pallets 800x1200 Lengthways                              | Ast       | in  | 181.29               | 181.29               |
| 4.35             | Turning Radius                                                           | Wa        | in  | 105.11               | 105.11               |
| Performance Data |                                                                          |           |     |                      |                      |
| 5.1              | Travel Speed, Loaded / Unloaded (80v)                                    |           | mph | 11.2 / 11.2          | 11.2 / 11.2          |
| 5.2              | Lift Speed, Loaded / Unloaded (80v)                                      |           | fpm | 70.9 / 102.4         | 65 / 98.4            |
| 5.3              | Lowering Speed, Loaded / Unloaded                                        |           | fpm | 99 / 89              | 99 / 89              |
| 5.6              | Max. Drawbar Pull, Loaded / Unloaded                                     |           | fpm | 6,336 / 6,535        | 6,443 / 6,520        |
| 5.8              | Max. Gradient Performance, Loaded / Unloaded                             |           | %   | 23 / 25              | 21 / 23              |
| 5.10             | Service Brake                                                            |           |     | Hydraulic            | Hydraulic            |
| Motor & Battery  |                                                                          |           |     |                      |                      |
| 6.1              | Drive Motor Rating S2 60min (48v)                                        |           | hp  | 13.4 × 2             | 13.4 × 2             |
| 6.2              | Lift Motor Rating at S3 20%( S2 10min) (48v)                             |           | hp  | 37.5                 | 37.5                 |
| 6.4              | Battery Voltage, Nominal Capacity K5 (Option)                            |           | Ah  | 80 / 700             | 80 / 700             |
| 6.5              | Battery Compartment                                                      | L x W x H | in  | 40.7 × 39.5 × 30.9   | 40.7 × 39.5 × 30.9   |
| 6.6              | Battery Weight                                                           |           | lb  | 4,618-5,368          | 4,618-5,368          |
| Additional Data  |                                                                          |           |     |                      |                      |
| 8.1              | Type of Drive Control                                                    |           |     | AC                   | AC                   |

\* All specifications in this catalog are subject to change according to the optional items.

| 40B-9                      |       |                     |                          |                    |                       |                 |     |                                 |           |                              |           |                         |           |
|----------------------------|-------|---------------------|--------------------------|--------------------|-----------------------|-----------------|-----|---------------------------------|-----------|------------------------------|-----------|-------------------------|-----------|
| Mast Type                  |       | Maximum Fork Height | Overall Height (Lowered) | Free Lift Height   |                       | Mast Tilt Angle |     | Load capacity without Sideshift |           | Load capacity with Sideshift |           | Truck Weight (Unloaded) |           |
|                            |       |                     |                          | With Load Backrest | Without Load Backrest | Fwd             | Bwd | Single Tire                     | Dual tire | Single Tire                  | Dual Tire | Single Tire             | Dual Tire |
|                            |       | in                  | in                       | in                 | in                    | deg             | deg | lb                              | lb        | lb                           | lb        | lb                      | lb        |
| 2 Stage Limited Free Li ft | V270  | 107.08              | 81.69                    | 4.72               | 4.72                  | 6               | 10  | 8,818.49                        | 8,818.49  | 8,024                        | 7,958     | 15,064.19               | 15,655.03 |
|                            | V300  | 118.89              | 87.59                    | 4.72               | 4.72                  | 6               | 10  | 8,818.49                        | 8,818.49  | 8,024                        | 7,958     | 15,112.69               | 15,710.14 |
|                            | V330  | 130.70              | 93.50                    | 4.72               | 4.72                  | 6               | 10  | 8,818.49                        | 8,818.49  | 8,024                        | 7,958     | 15,176.62               | 15,767.46 |
|                            | V350  | 138.58              | 99.40                    | 4.72               | 4.72                  | 6               | 10  | 8,818.49                        | 8,818.49  | 8,024                        | 7,958     | 15,229.53               | 15,857.85 |
|                            | V370  | 146.45              | 103.34                   | 4.72               | 4.72                  | 6               | 10  | 8,818.49                        | 8,818.49  | 8,024                        | 7,918     | 15,267.01               | 15,935.01 |
|                            | V400  | 158.26              | 111.61                   | 4.72               | 4.72                  | 6               | 10  | 8,818.49                        | 8,818.49  | 8,024                        | 7,958     | 15,344.17               | 15,769.67 |
|                            | V450  | 177.95              | 121.45                   | 4.72               | 4.72                  | 6               | 6   | 8,598                           | 8,818.49  | 7,826                        | 7,958     | 15,436.77               | 16,027.61 |
|                            | V500  | 197.63              | 131.29                   | 4.72               | 4.72                  | 6               | 6   | 8,377                           | 8,708     | 7,605                        | 7,870     | 15,531.57               | 16,120.2  |
| 3 Stage Full Free Lift     | TF370 | 146.85              | 79.72                    | 44.84              | 31.96                 | 6               | 6   | 8,818.49                        | 8,818.49  | 8,046                        | 8,267     | 15,727.78               | 16,292.16 |
|                            | TF400 | 158.66              | 83.66                    | 48.77              | 35.90                 | 6               | 6   | 8,818.49                        | 8,818.49  | 8,046                        | 7,980     | 15,785.1                | 16,349.48 |
|                            | TF430 | 170.47              | 87.59                    | 52.71              | 39.84                 | 6               | 6   | 8,598                           | 8,708     | 7,826                        | 7,870     | 15,840.21               | 16,404.6  |
|                            | TF450 | 177.55              | 89.96                    | 55.07              | 42.20                 | 6               | 6   | 8,487                           | 8,598     | 7,738                        | 7,782     | 15,875.49               | 16,439.87 |
|                            | TF470 | 185.82              | 93.50                    | 58.62              | 45.74                 | 6               | 6   | 8,377                           | 8,487     | 7,627                        | 7,672     | 15,926.19               | 16,490.58 |
|                            | TF500 | 197.63              | 97.44                    | 62.55              | 49.68                 | 6               | 6   | 8,267                           | 8,267     | 7,517                        | 7,473     | 15,983.51               | 16,547.9  |
|                            | TF550 | 217.32              | 104.52                   | 69.64              | 56.77                 | 6               | 6   | 7,936                           | 8,046     | 7,209                        | 7,253     | 16,095.95               | 16,660.33 |
|                            | TF600 | 237.40              | 111.61                   | 76.73              | 63.85                 | 6               | 6   | 7,716                           | 7,716     | 7,101                        | 6,944     | 15,963.67               | 16,746.31 |

\* TF-Mast : Wide Visible 3-Stage FullFree Lift Mast with 1Free Lift Cylinders.

\* Standard

| 45B-9                     |       |                     |                          |                    |                       |                 |     |                                 |           |                              |           |                         |           |
|---------------------------|-------|---------------------|--------------------------|--------------------|-----------------------|-----------------|-----|---------------------------------|-----------|------------------------------|-----------|-------------------------|-----------|
| Mast Type                 |       | Maximum Fork Height | Overall Height (Lowered) | Free Lift Height   |                       | Mast Tilt Angle |     | Load capacity without Sideshift |           | Load capacity with Sideshift |           | Truck Weight (Unloaded) |           |
|                           |       |                     |                          | With Load Backrest | Without Load Backrest | Fwd             | Bwd | Single Tire                     | Dual tire | Single Tire                  | Dual Tire | Single Tire             | Dual Tire |
|                           |       | in                  | in                       | in                 | in                    | deg             | deg | lb                              | lb        | lb                           | lb        | lb                      | lb        |
| 2 Stage Limited Free Lift | V270  | 107.08              | 81.69                    | 4.72               | 4.72                  | 6               | 10  | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,135.63               | 16,609.63 |
|                           | V300  | 118.89              | 87.59                    | 4.72               | 4.72                  | 6               | 10  | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,212.79               | 16,666.95 |
|                           | V330  | 130.70              | 93.50                    | 4.72               | 4.72                  | 6               | 10  | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,248.07               | 16,724.27 |
|                           | V350  | 138.58              | 99.40                    | 4.72               | 4.72                  | 6               | 10  | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,303.18               | 16,777.18 |
|                           | V370  | 146.45              | 103.34                   | 4.72               | 4.72                  | 6               | 10  | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,338.46               | 16,814.66 |
|                           | V400  | 158.26              | 1116.45                  | 4.72               | 4.72                  | 6               | 10  | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,417.82               | 16,891.82 |
|                           | V450  | 177.95              | 121.45                   | 4.72               | 4.72                  | 6               | 6   | 9,920.8                         | 9,920.8   | 8,928                        | 8,884     | 16,510.42               | 16,984.41 |
|                           | V500  | 197.63              | 131.29                   | 4.72               | 4.72                  | 6               | 6   | 9,700                           | 9,810     | 8,730                        | 8,774     | 16,603.01               | 17,081.42 |
| 3 Stage Full Free Lift    | TF370 | 146.85              | 79.72                    | 44.84              | 31.96                 | 6               | 6   | 9,920.8                         | 9,920.8   | 8,950                        | 8,906     | 16,618.45               | 17,182.83 |
|                           | TF400 | 158.66              | 83.66                    | 48.77              | 35.90                 | 6               | 6   | 9,810                           | 9,810     | 8,840                        | 8,796     | 16,675.77               | 17,240.15 |
|                           | TF430 | 170.47              | 87.59                    | 52.71              | 39.84                 | 6               | 6   | 9,700                           | 9,590     | 8,752                        | 8,598     | 16,733.09               | 17,297.47 |
|                           | TF450 | 177.55              | 89.96                    | 55.07              | 42.20                 | 6               | 6   | 9,590                           | 9,369     | 8,624                        | 8,399     | 16,766.16               | 17,330.54 |
|                           | TF470 | 185.82              | 93.503                   | 58.62              | 45.74                 | 6               | 6   | 9,479                           | 9,259     | 8,531                        | 8,289     | 16,819.07               | 17,383.45 |
|                           | TF500 | 197.63              | 97.44                    | 62.55              | 49.68                 | 6               | 6   | 9,259                           | 9,038     | 8,333                        | 8,090     | 16,876.39               | 17,440.77 |
|                           | TF550 | 217.32              | 104.52                   | 69.64              | 56.77                 | 6               | 6   | 9,038                           | 8,818     | 8,135                        | 7,870     | 16,991.03               | 17,555.41 |
|                           | TF600 | 237.40              | 111.61                   | 76.73              | 63.85                 | 6               | 6   | 8,708                           | 8,598     | 7,826                        | 7,672     | 17,077.01               | 17,641.39 |


\* TF-Mast : Wide Visible 3-Stage FullFree Lift Mast with 1Free Lift Cylinders.

\* Standard

| 50B-9                     |       |                     |                          |                    |                       |                 |     |                                 |           |                              |           |                         |           |
|---------------------------|-------|---------------------|--------------------------|--------------------|-----------------------|-----------------|-----|---------------------------------|-----------|------------------------------|-----------|-------------------------|-----------|
| Mast Type                 |       | Maximum Fork Height | Overall Height (Lowered) | Free Lift Height   |                       | Mast Tilt Angle |     | Load capacity without Sideshift |           | Load capacity with Sideshift |           | Truck Weight (Unloaded) |           |
|                           |       |                     |                          | With Load Backrest | Without Load Backrest | Fwd             | Bwd | Single Tire                     | Dual tire | Single Tire                  | Dual Tire | Single Tire             | Dual Tire |
|                           |       | in                  | in                       | in                 | in                    | deg             | deg | lb                              | lb        | lb                           | lb        | lb                      | lb        |
| 2 Stage Limited Free Lift | V260  | 103.14              | 81.88                    | 4.72               | 4.72                  | 6               | 10  | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,151.96               | 17,469.43 |
|                           | V290  | 114.96              | 87.79                    | 4.72               | 4.72                  | 6               | 10  | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,207.08               | 17,526.75 |
|                           | V320  | 126.77              | 93.70                    | 4.72               | 4.72                  | 6               | 10  | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,264.4                | 17,581.87 |
|                           | V340  | 134.64              | 99.60                    | 4.72               | 4.72                  | 6               | 10  | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,319.52               | 17,636.98 |
|                           | V360  | 142.51              | 103.54                   | 4.72               | 4.72                  | 6               | 10  | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,356.99               | 17,672.25 |
|                           | V390  | 154.33              | 111.81                   | 4.72               | 4.72                  | 6               | 10  | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,434.16               | 17,751.62 |
|                           | V440  | 174.01              | 121.65                   | 4.72               | 4.72                  | 6               | 6   | 11,001.07                       | 11,001.07 | 9,942                        | 9,898     | 17,526.75               | 17,844.22 |
|                           | V490  | 193.7               | 131.49                   | 4.72               | 4.72                  | 6               | 6   | 10,802                          | 10,802    | 9,744                        | 9,700     | 17,621.55               | 17,939.01 |
| 3 Stage Full Free Lift    | TF360 | 144.17              | 79.921                   | 42.28              | 31.77                 | 6               | 6   | 11,001.07                       | 11,001.07 | 9,964                        | 10,251    | 17,509.11               | 17,941.22 |
|                           | TF390 | 155.98              | 83.85                    | 46.22              | 35.7                  | 6               | 6   | 11,001.07                       | 11,001.07 | 9,964                        | 9,898     | 17,566.43               | 17,998.54 |
|                           | TF420 | 167.79              | 87.79                    | 50.15              | 39.64                 | 6               | 6   | 10,802                          | 10,802    | 9,766                        | 9,722     | 17,623.75               | 18,055.86 |
|                           | TF440 | 174.88              | 90.15                    | 52.51              | 42                    | 6               | 6   | 10,692                          | 10,692    | 9,656                        | 9,612     | 17,659.03               | 18,088.93 |
|                           | TF460 | 183.14              | 93.70                    | 56.06              | 45.55                 | 6               | 6   | 10,582                          | 10,471    | 9,568                        | 9,413     | 17,709.73               | 18,141.84 |
|                           | TF490 | 194.96              | 97.63                    | 60                 | 49.48                 | 6               | 6   | 10,361                          | 10,251    | 6,369                        | 9,215     | 17,767.05               | 18,199.16 |
|                           | TF540 | 214.64              | 104.72                   | 67.08              | 56.18                 | 6               | 6   | 10,031                          | 9,920     | 9,061                        | 8,906     | 17,879.49               | 18,311.6  |
|                           | TF590 | 234.72              | 111.81                   | 74.17              | 63.66                 | 6               | 6   | 9,700                           | 9,700     | 8,752                        | 8,708     | 17,967.67               | 18,399.78 |

\* TF-Mast : Wide Visible 3-Stage FullFree Lift Mast with 1Free Lift Cylinders.

\* Standard

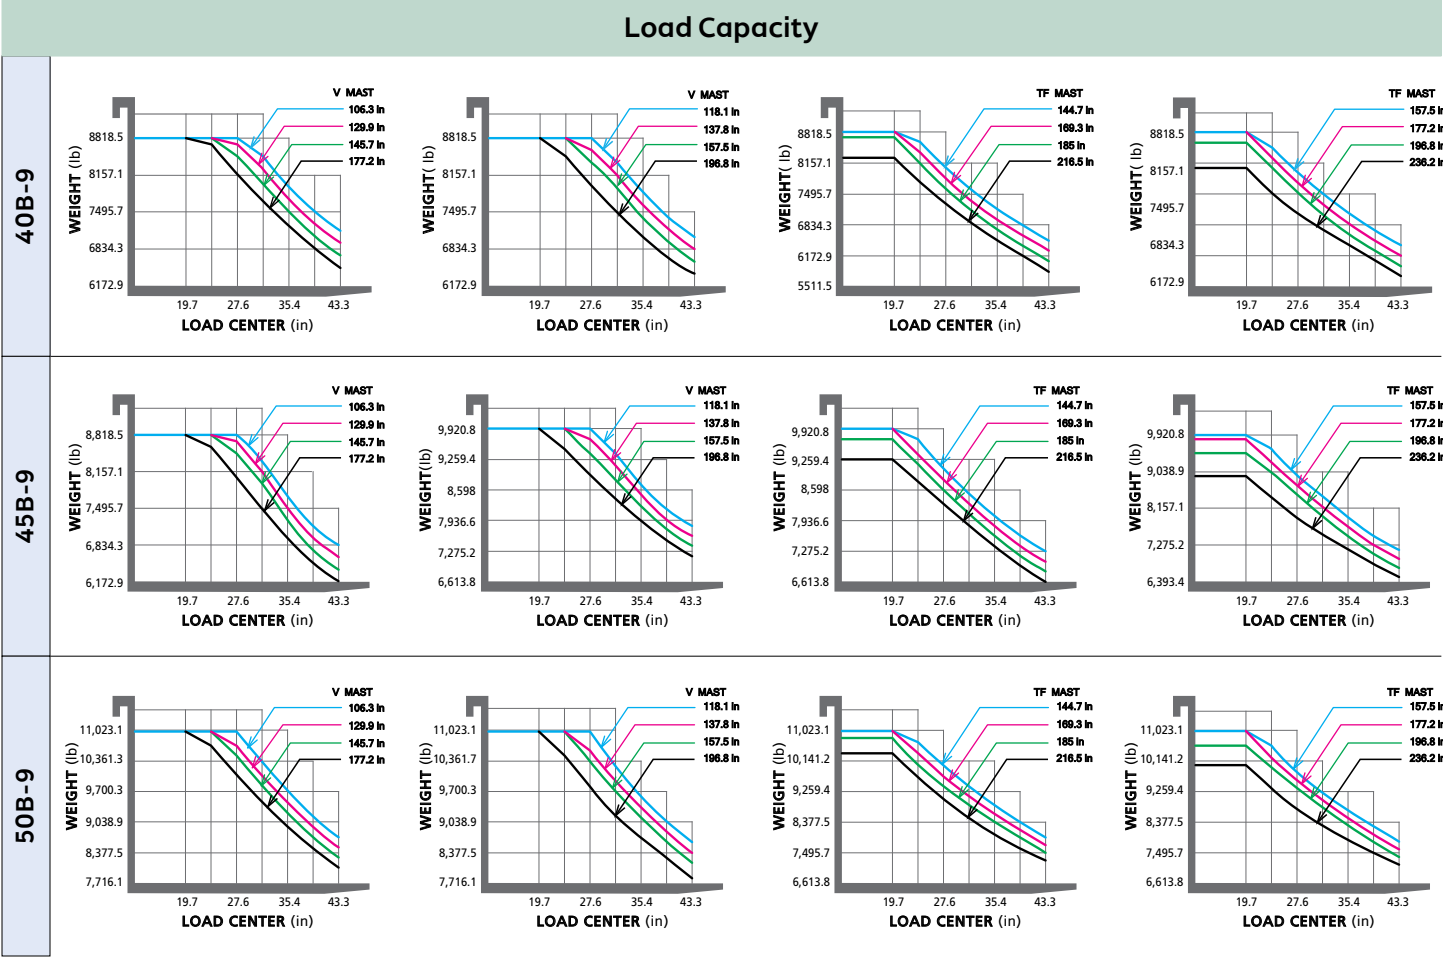

## B-9 Series Options

### Mast

- Refer to the Mast Specification

### Fork Length (in)

#### 40B-9

- 42, 48 (std), 53.9, 59.8, 65.7, 71.6, 77.6, 83.5, 94.5

#### 45B-9

- 42, 48 (std), 53.9, 59.8, 65.7, 71.6, 77.6, 86.6, 94.5

#### 50B-9

- 42, 48 (std), 53.9, 65.7, 71.6, 77.6, 86.6, 94.5

### Sideshift

### Tire

- Solid (std) / Non-marking / Pneumatic / Double Tire

### Fingertip Control

### Cold Storage (for -22° cold working environments)

### Auto Fork Leveling

### M.C.V

- 2-Spool (std)
- 3-Spool
- 4-Spool

### Load Indicator

### Side Battery Removal

### Direction Switch on Lever

### Side Mirror

### Cabin (one door specification)

- Front + Roof
- Front + Roof + Rear
- Front + Roof + Rear + Door
- Front + Roof + Rear + Door + Heater
- Front + Roof + Rear + Door + Heater + Audio



## THE 40/45/50B-9 COMES WITH OUR BEST-IN-CLASS WARRANTY

When you build better equipment, you can back them better. That's why Hyundai forklifts come with a 3-year, 4,000-hour warranty that sets a new standard for overall lowest cost of ownership.

**NO ONE  
DELIVERS MORE**



6100 Atlantic Blvd.  
Norcross, GA 30071  
[hyundaimaterialhandling.com](http://hyundaimaterialhandling.com)

678-823-7777