


STOP!! **USE ONLY DURING POWER OUTAGE!**

How to Operate your Rolling Shutter Crank Override

Step 1

Fit the provided tool over the lowering mechanism. Roll-down shutters come with a crank rod to lower and raise them during a power outage. The tool is a long, metal bar with a crank on one end. The other end fits over the lowering mechanism, which is located on the interior of the unit near the top corner of the window (left or right side).

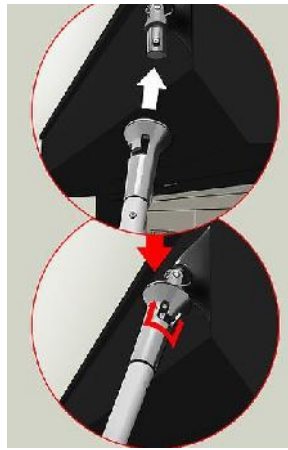

Step 2

Once the tool is in place, spin the crank slowly to the left or the right to lower the shutter. If you see the shutter coming down, continue spinning until the shutter has lowered completely over the window. If the shutter does not come down after a few cranks, spin the crank in the opposite direction until you see it start to come down.

