

# GALLERY® STEEL

## garage doors

3-LAYER CONSTRUCTION

**Clopay®**

America's Favorite Garage Doors®



Model GD2SU; Shown in Black with SQ22 Windows

# GALLERY® STEEL

The Gallery® Steel three-layer construction provides exceptional strength, energy efficiency and dent resistance as well as a beautiful carriage house appearance. The 2" or 1-3/8" thickness of Intellicore® polyurethane or bonded polystyrene insulation and thermal break makes these doors heat and cold resistant while the tongue-and-groove joint helps seal out wind, rain and snow. Available in short and long panels with multiple window options, the three-layer Gallery® Steel is virtually maintenance-free, so the first fabulous impression becomes a lasting impression.



## 3-Layer Construction

GD2SU  
& GD2LU  
MODELS




2"

POLYURETHANE  
INSULATION

R-VALUE

**18.4**

GD1SU  
& GD1LU  
MODELS



1 3/8"

POLYURETHANE  
INSULATION

R-VALUE

**12.9**

GD2SP  
& GD2LP  
MODELS




2"

POLYSTYRENE  
INSULATION

R-VALUE

**9.0**

GD1SP  
& GD1LP  
MODELS



1 3/8"

POLYSTYRENE  
INSULATION

R-VALUE

**6.5**

**intellicore®**  
insulation technology

### Warmer. Quieter. Stronger.

Gallery® Steel garage doors featuring Intellicore® insulation technology represent the ultimate smart choice for homeowners. Clopay's Intellicore® insulation is a proprietary polyurethane foam that is injected into a garage door, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, and with one of the industry's leading R-values of 18.4, it provides year-round comfort and improved energy efficiency. Smart, indeed.

Calculated door section R-value is in accordance with DASMA TDS-163.  
Models with Ultra-Grain® finish and Black paint options are 25 gauge steel.



Model GD1LU; Shown in  
Ultra-Grain® Oak Slate Finish  
with Grille on ARCH1 Windows

# VINTAGE style with updated APPEAL

## COLORS



- Exterior steel on standard color doors has a natural woodgrain texture.
- Doors can be painted to match the home's exterior using a high-quality latex exterior paint. Do not use oil-based paint.

\*Popular in select markets. Glacier White is a brighter white.

†Additional charges apply.

Due to the printing process, colors may vary.

## CUSTOM PAINT OPTION




Color Blast® finish offers more than 1,500 Sherwin-Williams® color options to complement your home. Clopay's durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

## ULTRA-GRAIN® FINISH OPTION



Ultra-Grain® Oak  
Medium Finish



Ultra-Grain® Oak  
Dark Finish



Ultra-Grain® Oak  
Walnut Finish



Ultra-Grain® Oak  
Slate Finish

- Painted steel surface simulates a real stained door without the need of staining and the ongoing maintenance of wood.
- Oak woodgrain runs horizontal on stiles and vertical on panels for an authentic, natural look.
- Available in Medium, Dark, Walnut or Slate finishes that complement Clopay Entry Doors, shutters and other exterior stained wood products.
- Exterior steel surface on an Ultra-Grain® finish door has a stucco texture to create a more natural woodgrain appearance.
- Window frames, grilles and inserts are color matched to coordinate with the Ultra-Grain® finish patterns. All window options are available.


Additional charges apply.

## SHORT PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

Doors range from 6'0" to 16'0" high and 6'2" to 20'0" wide. Consult your Clopay Dealer for size options.

### MODELS

GD1SP, GD1SU,  
GD2SP AND GD2SU

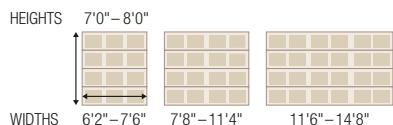

Illustrations simplified for clarity.

9'0"-10'0"

10'6"-12'0"

#### Long Top Section



#### Plain Short



#### Plain Long



#### REC12



#### REC14



#### SQ22



#### SQ24



#### Trenton® Short<sup>†</sup>



#### Trenton® Long<sup>†</sup>



#### Kristin® Short<sup>†</sup>



#### Kristin® Long<sup>†</sup>



#### Wrought Iron Short<sup>††</sup>



#### Wrought Iron Long<sup>††</sup>



<sup>\*</sup>Acrylic

<sup>†</sup>Complements Clopay Entry Door glass.

Note: Due to stile width restrictions, some odd size door widths may allow only for the installation of a single handle. See your Clopay Dealer for details.

#### ARCH1



#### Vertical Grille on ARCH1



#### Grille on ARCH1



#### ARCH2



#### Vertical Grille on ARCH2



#### Grille on ARCH2



#### ARCH3



#### Vertical Grille on ARCH3




#### Grille on ARCH3



#### Clayton™ Short<sup>†</sup>



#### Clayton™ Long<sup>†</sup>



#### Wrought Iron Arch<sup>\*†</sup>




# LONG PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

Doors range from 6'0" to 16'0" high and 7'8" to 20'0" wide. Consult your Clopay Dealer for size options.

## MODELS

GD1LP, GD1LU,  
GD2LP AND GD2LU

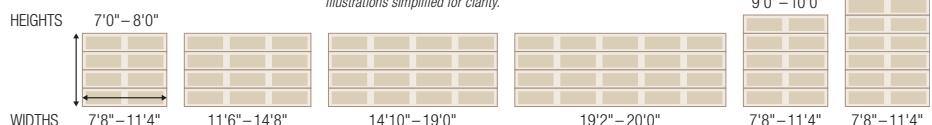

\*Acrylic

<sup>†</sup>Complements Clopay Entry Door glass.

Note: Due to stile width restrictions, some odd size door widths may allow only for the installation of a single handle. See your Clopay Dealer for details.

# Windows

## GLASS




\*Complements Clopay Entry Door glass.

Long and short windows may be used in any Gallery® Steel 3-layer model. Double-strength glass is standard.

Optional obscure, 3/4" insulated and 3/4" insulated obscure glass is available on all Gallery® Steel 3-layer models.

Additional charges for optional glass apply.

## ACRYLIC



Acrylic windows require special cleaning. Never use products that contain ammonia or petroleum products to clean acrylic. Please visit [www.clopaydoor.com/acrylic](http://www.clopaydoor.com/acrylic) for complete details.

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs. Clear acrylic also available.



## Additional Features



Large authentic arch window designs. Ultra-Grain® finish window frames, grilles and inserts are color coordinated to Medium, Dark, Walnut and Slate finishes.



2" thick polystyrene doors and all Intellicore® polyurethane insulation doors come standard with 10-ball roller and heavy-duty 14 gauge steel hinges.



Energy-efficient thermal break. Polyurethane model shown.

- Hot-dipped galvanized steel interior and exterior skins with a baked-on primer and top coat help ensure a virtually maintenance-free door with long-lasting beauty.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 2" thick polystyrene doors and all Intellicore® polyurethane insulation doors comply with 2015 IECC air infiltration requirement of 0.40 cfm/ft<sup>2</sup> or less (IECC, Section C402.5.2).
- See your Clopay Dealer for WINDCODE® door availability.


## Decorative Hardware

### STANDARD



Note: Decorative hardware options vary based on door widths. Standard hardware is not provided if a lock is chosen. See your Clopay Dealer for details.

### OPTIONAL

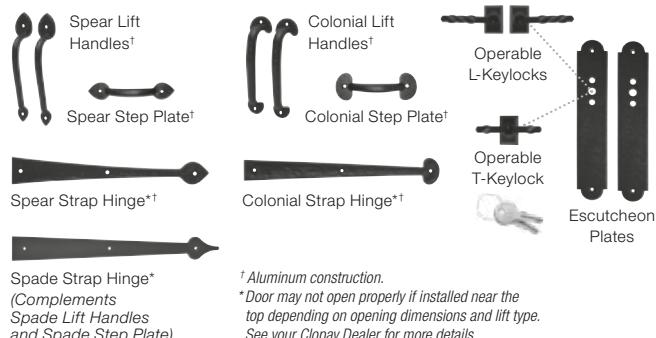

Spear Strap Hinge\*  
(Complements Spade Lift Handles and Spade Step Plate)

<sup>†</sup> Aluminum construction.  
\*Door may not open properly if installed near the top depending on opening dimensions and lift type. See your Clopay Dealer for more details.

## Warranties



## Environmental Assurance

Clopay doors are compliant with environmental laws and regulations. Clopay doors do not contain HFCs. All Clopay doors are compliant with:

- California SB 1013
- New Jersey A-5583/S-3919 – Greenhouse Gas Bill
- Washington HB 1112 – Hydrofluorocarbon Greenhouse Gas Emissions
- Canadian regulations amending the ozone-depleting substances and halocarbon alternatives regulations



Visit [clopaydoor.com](http://clopaydoor.com) or call 1-800-2CLOPAY (225-6729) for more information on Clopay, America's Favorite Garage Doors.

Follow us on



©2022 Clopay Corporation. All rights reserved.

RSDR-GALLERY3LAYERSS-10\_REV0422

imagine



DESIGN YOUR DOOR  
OPEN CAMERA  
AND POINT!