

BE POWER®
EQUIPMENT

CANADA BEST
MANAGED
COMPANIES



35TH
ANNIVERSARY
PRODUCT CATALOG

PRESSURE WASHERS

INVERTERS & GENERATORS

WATER PUMPS

POWERED by
HONDA™



CENTURION PUMP

THE NEW STANDARD IN PRESSURE WASHER PERFORMANCE

From workshop to industrial, the new Centurion Pump Series delivers relentless power and durability in every class.

- CP pumps exceed the toughest performance demands, setting a new benchmark for reliability and efficiency.
- Every model carries an industry-leading 7-year warranty, proving the quality in design and longevity.
- From compact axial units to heavy-duty triplex systems, CP Pumps are built to dominate any demanding commercial or industrial application.



CENTURION PUMP

Unmatched Performance.
Unrivaled Quality.



EXPLORE THE FULL CENTURION PUMP SERIES

Scan the code to see specs, features, and model comparisons.



11 PRESSURE WASHERS

- 13** Cold Water Pressure Washers
- 29** Electric Pressure Washers
- 43** Hot Water Pressure Washers
- 69** Soft Wash Pressure Washers
- 73** European Program

79 INVERTERS & GENERATORS

- 82** Inverters
- 86** Generators

91 WATER TRANSFER PUMPS

- 94** Water Transfer Pumps
- 96** Semi-Trash Transfer Pumps
- 97** Full Trash Transfer Pumps
- 98** Chemical Transfer Pumps
- 99** High Pressure Transfer Pumps

107 POWEREASE ENGINES

111 REPLACEMENT PUMPS

129 ACCESSORIES & PARTS

130	Foam Cannon & Cleaning Solutions	139	Hose Reels	145	Telescoping Wand & Whirl-A-Way Guns
131	Chemical Injectors	140	Whirl-A-Way Surface Cleaners	146	Gun & Wand Assemblies
131	Oils & Pump Saver	143	Water Brooms Surface Cleaners	147	Telescoping Wands
133	Nozzles	144	Gutter Cleaners	148	Sewer Jetter
135	Fittings & Couplers	144	Ball Valve kits	150	Sandblast Kit
136	Pressure Relief Valve, Thermal Valves & Pressure Gauge	145	High Temperature Shut-Off Guns	151	Coupler O-Rings
138	Hoses			151	Garden Hose Attachments

THE POWER YOU NEED FOR EVERY JOB

Choose the series that fits your work. Whether it's light cleaning around the house, dependable equipment for daily use, or industrial-grade machines for nonstop performance.

WORKSHOP

SERIES

FOR HOMEOWNERS AND SMALL BUSINESSES WITH LIGHT, OCCASIONAL PROJECTS.

Perfect for cleaning driveways, siding, decks, vehicles, and other small jobs around the house or shop. These units are compact, lightweight, and affordable.

COMMON FEATURES:

- Powerease 225 Engine
- Axial Pump
- Powder-coated steel frame
- M22 or quick-connect fittings
- 25' Hose

COMMERCIAL

SERIES

FOR CONTRACTORS AND BUSINESSES WHO NEED DEPENDABLE EQUIPMENT EVERY DAY.

Ideal for garages, shops, property maintenance, and job sites. Designed for frequent use with powerful options that can handle tough daily tasks.

COMMON FEATURES:

- Honda GX or Powerease Engine
- Triplex Pump
- Powder-coated steel, stainless steel, or aluminum frame
- Quick-connect fittings
- 50' Hose

INDUSTRIAL

SERIES

FOR PROFESSIONALS WHO DEMAND MAXIMUM POWER AND PERFORMANCE.

Engineered for critical, high-duty jobs where reliability matters most. Industrial machines deliver power and durability to take on the toughest conditions all day, every day.

COMMON FEATURES:

- Honda GX Engine
- Triplex Pump
- Belt Drive
- Powder-coated steel or aluminum frame
- Quick-connect fittings
- 50' Hose

BREAKING DOWN A PRESSURE WASHER

Understand the key parts that deliver the power you need.

A pressure washer is more than an engine and pump, it's a system of components working together to deliver cleaning power. Using the acronym **THE POWER YOU NEED**, here are the essential elements that define performance, durability, and ease of use.

THE POWER YOU NEED

T TEMPERATURE

WATER TEMPERATURE

Cold water tackles dirt and mud, while hot water cuts through grease and oil for demanding jobs.

H HOSE


PRESSURE HOSE

The hose delivers water under pressure. Length, fittings, and build quality affect ease of use, durability, and safety.

E ENDS

INLET AND OUTLET FITTINGS

Fittings connect hoses, guns, and nozzles. Quick-connect is fast and convenient, while M22 thread is common on workshop units.

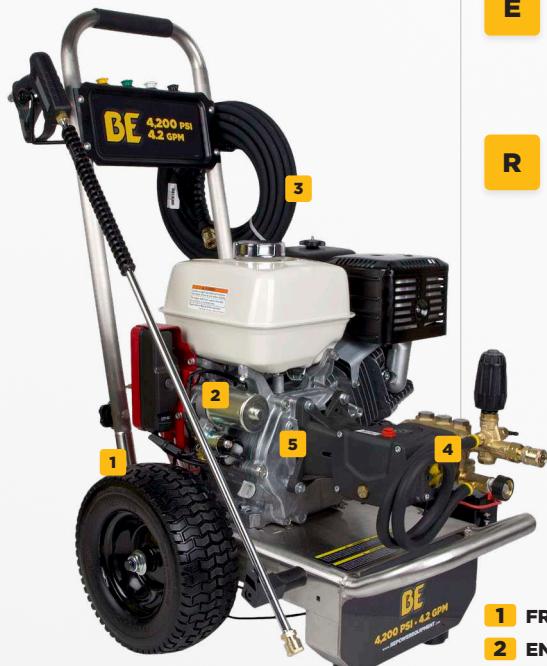

P PUMP

PUMP TYPES

The pump generates water pressure. Axial pumps are compact and economical, and triplex pumps are stronger and longer lasting.

O OUTPUT

PSI

Pounds per Square Inch measures pressure output. Higher PSI means greater cleaning force.

W WATER FLOW

GPM

Gallons per Minute measures flow rate. More GPM moves dirt faster and improves rinsing.

E ENGINE

GAS OR ELECTRIC

Engines and motors drive the pump. More horsepower or displacement delivers more pressure and flow.

R REPAIRS

SERVICE & SUPPORT

Regular service extends machine life. A network of certified service centers keep your pressure washer working longer.

Y YOUR MAINTENANCE

OWNER CARE

Changing oil, replacing filters, and proper winterizing prevent costly downtime and keep performance reliability high.

O OPERATION

APPLICATION NEEDS

Choose a pressure washer matched to your needs such as light home use, regular commercial jobs, or daily industrial cleaning.

U UNLOADER

PRESSURE CONTROL

The unloader regulates PSI and GPM, and protects the pump when the trigger is released.

N NOZZLES

SPRAY TIPS

Different spray angles and sizes customize pressure and cleaning power for each job.

E ENVIRONMENT

USAGE SETTING

Electric units are quieter and emission-free indoors use, and gas models provide more power and mobility outdoors.

E ENGINEERING

BUILD QUALITY

Every BE pressure washer is engineered and tested for reliable performance and value.

D DRIVE

DRIVE SYSTEM

Direct drive is compact and cost-effective, while belt drive runs cooler and lasts longer.

1 FRAME & TIRE GUIDE: PAGE 8

2 ENGINE GUIDE: PAGE 6

3 HOSE GUIDE: PAGE 7

4 PUMP & UNLOADER GUIDE: PAGE 7

5 DRIVE SYSTEMS GUIDE: PAGE 6

DRIVE SYSTEMS

DIRECT DRIVE

A direct drive pump connects directly to the engine shaft with a hollow shaft design. Because the pump spins at the same speed as the engine, these units are compact, simple, and cost-effective. They're ideal for lighter-duty use where low maintenance and portability matter most.



BELT DRIVE

A belt drive pump uses pulleys and belts to reduce the pump speed. Running at a lower RPM means less heat, less vibration, and a much longer service life. Belt drive units are preferred for frequent or professional use, where durability and cooler operation are critical.



WATCH A VIDEO ABOUT
OUR DRIVE SYSTEMS

ENGINES

The engine is the powerhouse of every pressure washer, and reliability starts here. That's why we use overhead valve (OHV) engines, known for efficiency, durability, and easier servicing compared to side-valve designs. Their horizontal shaft setup also allows better alignment with the pump, making installation and maintenance simpler.



WATCH A VIDEO ABOUT
OUR ENGINES

DIRECT DRIVE

SERIES	WORKSHOP	COMMERCIAL	INDUSTRIAL
PRICE	\$\$\$\$	\$\$\$\$	\$\$\$\$\$
WEIGHT / SIZE	★★	★★	★★★★
MAX PSI	★★★★	★★★★	★★★★
HEAT MANAGEMENT	★★	★★	★★★
EASE OF MAINTENANCE	★★★	★★★	★★
LIFE SPAN	★★	★★	★★★

BENEFITS:

- Compact design
- Lower cost
- Easy to maintain

BELT DRIVE

BENEFITS:

- Better heat management
- Less vibration
- Longer lifespan

POWERAISE
ENGINES



POWERED by
HONDA™



POWERAISE SERIES

SERIES	WORKSHOP	COMMERCIAL	COMMERCIAL	INDUSTRIAL
VALVE TYPE	★★★★	★★★★	★★★★	★★★★
LIFE SPAN	★★★★	★★★★	★★★★	★★★★
WARRANTY	★★★★	★★★★	★★★★	★★★★
SERVICE CENTER TYPE	★★★	★★★	★★★	★★★
STANDARD WARRANTY	3 Years		3 Years	3 Years
REGISTERED WARRANTY	5 Years		N/A	N/A
SERVICE CENTER	BE Repair Center		Honda	

Engines: Page 108

PUMPS AND UNLOADERS

The pump is the heart of a pressure washer, while the unloader acts as its safety valve. The pump sets the pressure and flow, and the unloader regulates it to protect the pump. Knowing pump types and how unloaders work will help you choose the right machine.

WATCH A VIDEO ABOUT PUMPS AND UNLOADERS



AXIAL



TRIPLEX



TRIPLEX

SERIES	WORKSHOP SERIES	WORKSHOP SERIES	COMMERCIAL SERIES	COMMERCIAL SERIES	INDUSTRIAL SERIES
HEAD	Aluminum / Brass Head		Brass Head		Brass Head
UNLOADER TYPE	Built-In Unloader		Built-In Unloader		External Unloader
PRICE	\$		\$\$		\$\$\$\$
FITTINGS	Quick Connect		Quick Connect		Quick Connect
MAX PSI	★★		★★★★		★★★★
HEAT MANAGEMENT	★★		★★★		★★★
REBUILDABLE	★		★★★		★★★★
LIFE SPAN	★★		★★★		★★★★
REPLACEMENT PUMP CLASS	P1, P2		P3, P4, P5		P3+, P4+, P6-P11
	Axial (wobble plate) pumps are compact, affordable, and lightweight. Best suited for light and medium-duty applications, they offer good performance at a lower cost but have a shorter lifespan than triplex designs.		Triplex pumps use a crankshaft and piston system to deliver greater efficiency, power, and durability. They are the choice for medium to heavy-duty use where long life and higher performance are required.		
		BUILT-IN UNLOADER	• Compact design, saves space	EXTERNAL UNLOADER	• Bolted separately to pump head
		• Lower cost	• Internal parts serviceable	• Faster replacement and service	• Greater PSI/GPM capacity
					• Improved heat management

Pumps: Page 112

HOSES

Using the correct hose and nozzle size keeps your washer performing at its best and prevents excess strain on the pump and engine. Regular care extends hose life and reduces the risk of blowouts. High pressure and heat make maintenance a safety priority.

TIPS FOR MAINTAINING HOSES

- Use Correct Attachments:** Always match fittings, couplers, and adapters.
- Don't Drag or Kink:** Avoid pulling hoses around sharp corners or rough surfaces.
- Don't Flatten:** Braided layers can break and cause blowouts.
- Use Within Limits:** Stay within rated temperature and PSI.
- Store Safely:** Use reels or store off the ground to prevent damage.
- Keep Clean:** Rinse after use; remove water before freezing temps.



MATERIAL	H1	H2	H3	H5
MAX TEMP	60°C / 140°F	100°C / 212°F	149°C / 300°F	154°C / 310°F
INSIDE DIAMETER	1/4"	1/4"	3/8"	3/8"
LENGTH	25'	25'	50'	50'/100'
MAX PSI	3,200	4,500	4,500	6,000
WIRE BRAID LAYERS	0	1	1	2
FITTINGS	M22	Quick Connect Brass	Quick Connect Brass	Quick Connect Stainless Steel
COLOUR	Black	Black	Black / Grey	Black / Grey



WATCH A VIDEO ABOUT HOSES

Hoses: Page 138

FRAMES

Frames are the foundation of every pressure washer. The material and design affect durability, mobility, storage, and corrosion resistance. Choosing the right frame ensures your machine is easier to move, longer-lasting, and better suited to your work.

WATCH A VIDEO
ABOUT OUR FRAMES



116 + 129
ALUMINUM
DEALER FRAME

088
ALUMINUM BELT
DRIVE DEALER
FRAME

124S + 125S
STAINLESS STEEL
DEALER FRAME

238
TRUCK MOUNT
BELT DRIVE
DEALER FRAME

SERIES	WORKSHOP SERIES	WORKSHOP SERIES	COMMERCIAL SERIES	COMMERCIAL SERIES	INDUSTRIAL SERIES
MATERIAL	Powder Coated Steel	Powder Coated Steel	Aluminum	Stainless Steel	Powder Coated Steel
STYLE	Tilt Back	Tilt Back	Pull Up	Tilt Back	Truck Mount
PURCHASE PRICE	\$	\$\$	\$\$\$	\$\$\$\$	\$
CORROSION RESISTANCE	★★	★★	★★★★	★★★★	★★★★★
MOBILITY	★★	★★	★★★	★★	N/A
HANDLING / TRANSPORT	★★★	★★★	★★	★★★	N/A
STORAGE	★★★★★	★★★	★★	★★★	N/A
HOSE REEL MOUNTABLE	No	Yes	Yes	Yes	No
TIRES UP TO 225CC	11" Standard	10" Premium	10" Premium	10" Premium	N/A
TIRES OVER 225CC	N/A	12" Premium	12" Premium	12" Premium	N/A

DISCOVER MORE WITH QR CODES

EXTRA DETAILS MADE SIMPLE

Throughout this catalog you'll find QR codes that link directly to product pages on the BE website. Scan them to see full specifications, product images, comparison charts, infographics, and more.



PART NUMBER SEQUENCE

Every BE pressure washer part number follows a simple structure. Each letter and number represents important details such as frame style, pressure, engine, and pump type. Learning how to read these codes makes it easy to identify exactly what a model includes.

B 42 13 H E S A S

FRAME STYLE

- **Single letter** ➤ Commercial Frame
- **Double letter** ➤ Consumer/Retail Frame

PSI RATING

- Shown in hundreds of PSI
- Example: **32** ➤ 3,200 PSI
- **42** ➤ 4,200 PSI

HORSE POWER

- Indicates engine power (see legend below)

ENGINE BRAND

- **P** ➤ Powerease
- **H** ➤ Honda

UNLOADER UPGRADE OPTION

- **S** ➤ Separate Mount Unloader (External)
- **No letter** ➤ Built-in Unloader

PUMP STYLE

- **X** ➤ Centurion Pump Axial
- **A** ➤ Centurion Pump Triplex
- **J** ➤ Cat Triplex
- **G** ➤ General Pump Triplex

FRAME UPGRADE OPTION

- **A** ➤ Aluminum
- **S** ➤ Stainless
- **AB** ➤ Aluminum Belt Drive
- **TB** ➤ Truck Mount Belt Drive
- **R** ➤ Roll Cage
- **No letter** ➤ Standard Powder Coated

START SYSTEM UPGRADE

- **E** ➤ Electric Start
- **No letter** ➤ Default Recoil Start

HORSE POWER DIGITS

- **7** ➤ 7 HP 212CC ➤ Powerease 212
- **75** ➤ 7.5 HP 223CC ➤ Powerease 225
- **15** ➤ 15 HP 420CC ➤ Powerease 420
- **65** ➤ 6.5 HP 196CC ➤ Honda GX200
- **9** ➤ 9 HP 270CC ➤ Honda GX270
- **13** ➤ 13 HP 389CC ➤ Honda GX390
- **24** ➤ 24 HP 688CC ➤ Honda GX690
- **28** ➤ 28 HP 779CC ➤ Honda IGX800

EXAMPLE PART NUMBERS

BE 32 7 P X

- **Frame Style:** BE (Consumer Frame)
- **PSI Rating:** 3,200 PSI
- **Horsepower:** 7 HP (Powerease 212)
- **Engine Brand:** Powerease
- **Pump Brand:** Centurion Pump Axial

B 42 13 H E S A S

- **Frame Style:** B (Commercial Frame)
- **PSI Rating:** 4,200 PSI
- **Horsepower:** 13 HP (Honda GX390)
- **Engine Brand:** Honda
- **Start System:** Electric
- **Frame Option:** Belt Driven
- **Pump Brand:** Centurion Pump Triplex
- **Unloader Option:** Separate Mount Unloader (External)

INDUSTRY LEADING WARRANTY

**PROTECT YOUR INVESTMENT.
EXTEND YOUR COVERAGE.
REGISTER TODAY.**

WHY REGISTER?

When you register your product online, you unlock extra value that goes beyond your standard warranty. Select engines and models qualify for up to 5 years of coverage, ensuring you get the most from your BE equipment.

- ✓ **Additional Warranty:** Gain up to 3 extra years on qualifying products.
- ✓ **Priority Support:** Fast access to warranty and technical help when you need it.
- ✓ **Exclusive Offers:** Registered customers are eligible for special promotions and contests.

SAFEGUARDING YOUR WARRANTY

Your receipt and product information are stored in our secure database, so you'll never worry about lost paperwork. With details at hand, warranty requests are faster, easier, and stress-free.

CONTESTS AND PROMOTIONS

From time to time, registered customers get access to exclusive promotions and prize draws. It's our way of saying thanks for making registration part of your ownership experience.



LIFETIME COIL WARRANTY

Now standard on all BE hot water pressure washers. Details on page 42.



REGISTRATION IS EASY

- 1 Go to: [bepowerequipment.com/
product-registration](http://bepowerequipment.com/product-registration)
- 2 Enter your product details and
upload your proof of purchase.
- 3 That's it! Your product is securely
registered in our system.



SCAN FOR A QUICK
STEP-BY-STEP
TUTORIAL

COLD WATER PRESSURE WASHERS



POWERED by
HONDA™

BE
4,200 PSI • 4.2 GPM
www.BEPOWEREQUIPMENT.com

#THEPOWERYOU NEED

FROM SPACE WALL TO **WOW SPACE**



STOP WASTING SHOWROOM REAL ESTATE

Upload your space, and we'll design a planogram to turn dead space into profit space.

1 Scan the code
and login to your
planogram account.

2 Upload photos and
provide measurements
of your showroom.

3 New showroom?
Tell us how much
space is dedicated
to BE product.

4 We'll do the rest and
provide a custom-
designed planogram.

WORKSHOP SERIES

122

RETAIL FRAME

AXIAL PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • INTEGRATED SOAP TANK

Scan for full specs and product comparisons

**BE327PX**

ENGINE	Powerease 212 / 212CC
START TYPE	Recoil
PSI / GPM	3,200 / 2.5
PUMP TYPE	Axial
PUMP	CP CAG1
PUMP CLASS	P2
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING	80 lbs • 24" x 20" x 21"
(WHT & LxWxH)	

RRP ECOM

**BE3475PX**

ENGINE	Powerease 225 / 223CC
START TYPE	Recoil
PSI / GPM	3,400 / 2.5
PUMP TYPE	Axial
PUMP	CP CAG1
PUMP CLASS	P2
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING	80 lbs • 24" x 21" x 24"
(WHT & LxWxH)	

RRP ECOM

IN THE BOX

35' x QC THERMOPLASTIC HOSE

36" QC GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAPER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

RRP Retail Ready Packaging ECOM Ecom Ready Product New CP Pump



BE3475PX

- 1** RUBBER GRIP
- 2** QUICK CONNECT NOZZLE GROMMETS
- 3** HOSE/WAND HOLDER
- 4** REPOSITION HANDLE FOR EASY STORAGE
- 5** POWDER COATED STEEL FRAME
- 6** 3.6 L (0.95 GAL) GAS TANK
- 7** AXIAL PUMP WITH BUILT-IN UNLOADER
- 8** 11" STANDARD WHEELS
- 9** INTEGRATED SOAP TANK



COLD WATER PRESSURE WASHERS

WORKSHOP
SERIES

124 DEALER FRAME

AXIAL PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 10" PREMIUM WHEELS



B327PX

ENGINE	Powerease 212 / 212CC
START TYPE	Recoil
PSI / GPM	3,200 / 2.5
PUMP TYPE	Axial
PUMP	CP CAG1
PUMP CLASS	P2
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING	80 lbs • 24" x 21" x 24"
(WHT & LxWxH)	

RRP



B3475PX

ENGINE	Powerease 225 / 223CC
START TYPE	Recoil
PSI / GPM	3,400 / 2.5
PUMP TYPE	Axial
PUMP	CP CAG1
PUMP CLASS	P2
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING	80 lbs • 24" x 21" x 24"
(WHT & LxWxH)	

RRP ECOM

IN THE BOX

25' x 1/4" QC
STEEL BRAIDED
RUBBER HOSE

36" QC GUN/
WAND ASSEMBLY

15°, 25°, 40° & SOAKER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

RRP Retail Ready Packaging ECOM Ecom Ready Product New CP Pump

Scan for full specs and
product comparisons



- 1** RUBBER GRIP
- 2** QUICK CONNECT NOZZLE GROMMETS
- 3** HOSE/WAND HOLDER
- 4** POWDER COATED STEEL FRAME
- 5** 3.6 L (0.95 GAL) GAS TANK
- 6** AXIAL PUMP WITH BUILT-IN UNLOADER
- 7** 10" PREMIUM FLAT FREE WHEELS/TIRES
- 8** STABILIZING RUBBER FEET

COMMERCIAL SERIES

124

DEALER FRAME

TRIPLEX PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 10" PREMIUM WHEELS

Scan for full specs and product comparisons



B3865HA

ENGINE Honda GX200 / 196CC

START TYPE Recoil

PSI / GPM 3,800 / 2.5

PUMP TYPE Triplex

PUMP CP CTG1

PUMP CLASS P3

UNLOADER Built-In

INJECTOR Fixed

WARRANTY 3 Yrs

SHIPPING (WHT & LxWxH) 110 lbs • 25" x 23" x 24"

RRP ECOM



B3875PA

ENGINE Powerease 225 / 223CC

START TYPE Recoil

PSI / GPM 3,800 / 2.5

PUMP TYPE Triplex

PUMP CP CTG1

PUMP CLASS P3

UNLOADER Built-In

INJECTOR Fixed

WARRANTY 3 Yrs / 5 Yrs Reg

SHIPPING (WHT & LxWxH) 110 lbs • 25" x 23" x 24"

RRP ECOM

IN THE BOX

50' 3/8" QC STEEL BRAIDED RUBBER HOSE

36" QC GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAPER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

RRP Retail Ready Packaging ECOM Ecom Ready Product New CP Pump



1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 POWDER COATED STEEL FRAME

5 3.1 L (0.9 GAL) GAS TANK

6 TRIPLEX PUMP WITH BUILT-IN UNLOADER

7 10" PREMIUM FLAT FREE WHEELS/TIRES

8 STABILIZING RUBBER FEET



COLD WATER PRESSURE WASHERS

COMMERCIAL
SERIES

116 ALUMINUM DEALER FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 10" PREMIUM WHEELS

Scan for full specs and
product comparisons



B3165HAAS

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	3,100 / 3.1
PUMP TYPE	Triplex
PUMP	CP CTG1S
PUMP CLASS	P3+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	110 lbs • 31" x 23" x 23"
(WHT & LxWxH)	



B3165HAGS

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	3,100 / 3.1
PUMP TYPE	Triplex
PUMP	General TP2530
PUMP CLASS	P3+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	110 lbs • 31" x 23" x 23"
(WHT & LxWxH)	



B3165HAAS



- 1** RUBBER GRIP
- 2** HOSE/WAND HOLDER
- 3** QUICK CONNECT NOZZLE GROMMETS
- 4** ALUMINUM FRAME
- 5** 3.1 L (0.9 GAL) GAS TANK
- 6** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 7** 10" PREMIUM FLAT FREE WHEELS/TIRES
- 8** STABILIZING RUBBER FEET

IN THE BOX

50' x 3/8" QC
STEEL BRAIDED
RUBBER HOSE

36" QC INSULATED
GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

Ecom Ecom Ready Product New CP Pump

COMMERCIAL SERIES

Scan for full specs and product comparisons



124S

STAINLESS STEEL DEALER FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 10" PREMIUM WHEELS



B3165HSAS

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	3,100 / 3.1
PUMP TYPE	Triplex
PUMP	CP CTG1S
PUMP CLASS	P3+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	110 lbs • 31" x 23" x 23"
(WHT & LxWxH)	

ECOM 

B3165HSGS

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	3,100 / 3.1
PUMP TYPE	Triplex
PUMP	General TP2530
PUMP CLASS	P3+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	110 lbs • 31" x 23" x 23"
(WHT & LxWxH)	

IN THE BOX

 50' x 3/8" QC STEEL BRAIDED RUBBER HOSE

 36" QC INSULATED GUN/WAND ASSEMBLY

 15°, 25°, 40° & SOAKER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

ECOM Ecom Ready Product  New CP Pump

1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 STAINLESS STEEL FRAME

5 3.1 L (0.9 GAL) GAS TANK

6 TRIPLEX PUMP WITH EXTERNAL UNLOADER

7 10" PREMIUM FLAT FREE WHEELS/TIRES

8 STABILIZING RUBBER FEET



COLD WATER PRESSURE WASHERS

COMMERCIAL
SERIES

125 DEALER FRAME

TRIPLEX PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 12" PREMIUM WHEELS



B4213HA

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTG2
PUMP CLASS	P4
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs
SHIPPING	(WHT & LxWxH)

152 lbs • 32" x 25" x 27"

ECOM



B4415PA

ENGINE	Powerease 420 / 420CC
START TYPE	Recoil
PSI / GPM	4,400 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTG2
PUMP CLASS	P4
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING	(WHT & LxWxH)

153 lbs • 32" x 25" x 27"

RRP ECOM

IN THE BOX

50' x 3/8" QC
STEEL BRAIDED
RUBBER HOSE

36" QC INSULATED
GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

RRP Retail Ready Packaging **ECOM** Ecom Ready Product New CP Pump

Scan for full specs and
product comparisons



1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 POWDER COATED STEEL FRAME

5 6.1 L (1.5 GAL) GAS TANK

6 TRIPLEX PUMP WITH BUILT-IN UNLOADER

7 12" PREMIUM FLAT FREE WHEELS/TIRES

8 STABILIZING RUBBER FEET

COMMERCIAL SERIES

125

DEALER FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" PREMIUM WHEELS

Scan for full specs and product comparisons

**B4213HAS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTG2S
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	(WHT & LxWxH) 152 lbs • 32" x 25" x 27"

ECOM

**B4213HGS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	General EZ4040
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	(WHT & LxWxH) 152 lbs • 32" x 25" x 27"

IN THE BOX


50' 3/8" QC STEEL BRAIDED RUBBER HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

ECOM Ecom Ready Product New CP Pump

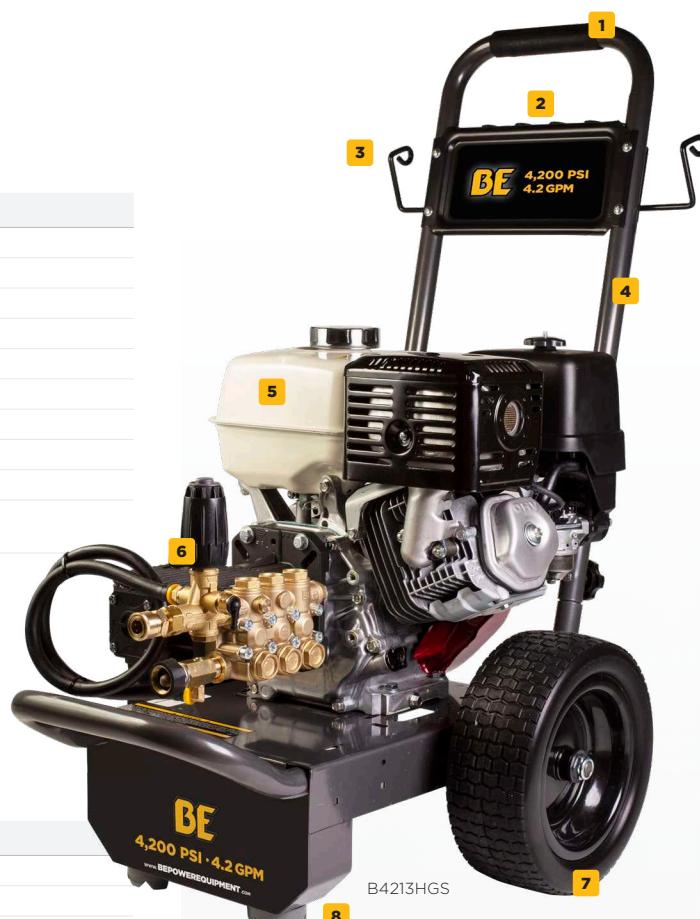

B4213HGS

- 1 RUBBER GRIP**
- 2 QUICK CONNECT NOZZLE GROMMETS**
- 3 HOSE/WAND HOLDER**
- 4 POWDER COATED STEEL FRAME**
- 5 6.1 L (1.5 GAL) GAS TANK**
- 6 TRIPLEX PUMP WITH EXTERNAL UNLOADER**
- 7 12" PREMIUM FLAT FREE WHEELS/TIRES**
- 8 STABILIZING RUBBER FEET**

129

ALUMINUM DEALER FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" PREMIUM WHEELS



B4213HAAS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTG2S
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	144 lbs • 32" x 25" x 27"



B4213HAGS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	General EZ4040
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	145 lbs • 32" x 25" x 27"

IN THE BOX

50' x 3/8" QC
STEEL BRAIDED
RUBBER HOSE


36" QC INSULATED
GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

Ecom Ecom Ready Product  New CP Pump

Scan for full specs and
product comparisons

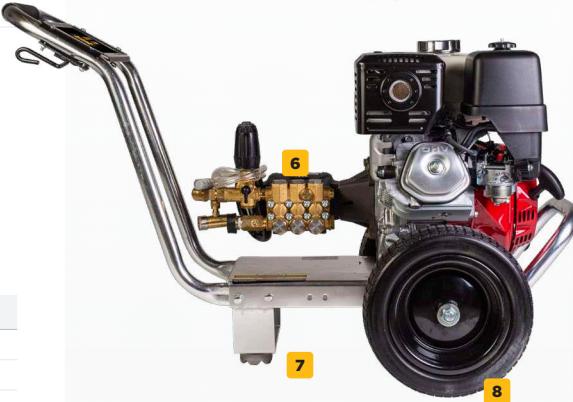

1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 ALUMINUM FRAME

5 6.1 L (1.5 GAL) GAS TANK

6 TRIPLEX PUMP WITH EXTERNAL UNLOADER

7 STABILIZING RUBBER FEET

8 12" PREMIUM FLAT FREE WHEELS/TIRES

COMMERCIAL SERIES

125S

STAINLESS STEEL DEALER FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS

Scan for full specs and product comparisons

**B4213HSAS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTG2S
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	147 lbs • 32" x 25" x 27"

**B4213HSGS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	General EZ4040
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	158 lbs • 32" x 25" x 27"

**B4213HESAS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil & Electric
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTG2S
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	152 lbs • 32" x 25" x 27"

**IN THE BOX**

50' 3/8" QC STEEL BRAIDED RUBBER HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAPER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

Electric Start (with battery & bracket) New CP Pump

**1 RUBBER GRIP****2 HOSE/WAND HOLDER****3 QUICK CONNECT NOZZLE GROMMETS****4 STAINLESS STEEL FRAME****5 6.1 L (1.5 GAL) GAS TANK****6 TRIPLEX PUMP WITH EXTERNAL UNLOADER****7 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES****8 STABILIZING RUBBER FEET**



COLD WATER PRESSURE WASHERS

COMMERCIAL
SERIES

125S STAINLESS STEEL DEALER FRAME

TRIPLEX PUMP • UNLOADER OPTIONS • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS



B4213HSJ

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CAT 67DX39GII
PUMP CLASS	P4
UNLOADER	Built-In
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	
(WHT & LxWxH)	156 lbs • 32" x 25" x 27"



B4213HSJS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	CAT 66DX40GII
PUMP CLASS	P4+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	
(WHT & LxWxH)	162 lbs • 32" x 25" x 27"

ECOM

IN THE BOX

50' x 3/8" QC STEEL BRAIDED RUBBER HOSE


36" QC INSULATED GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

ECOM Ecom Ready Product

Scan for full specs and product comparisons

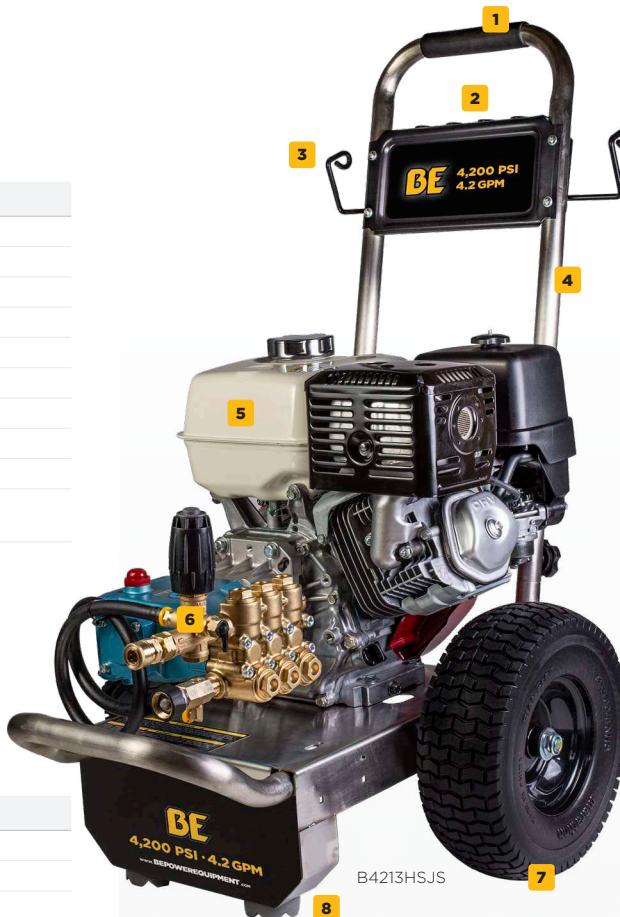

- 1** RUBBER GRIP
- 2** HOSE/WAND HOLDER
- 3** QUICK CONNECT NOZZLE GROMMETS
- 4** STAINLESS STEEL FRAME
- 5** 6.1 L (1.5 GAL) GAS TANK
- 6** TRIPLEX PUMP
- 7** 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 8** STABILIZING RUBBER FEET

INDUSTRIAL SERIES

088A

ALUMINUM BELT DRIVE DEALER FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS

Scan for full specs and product comparisons



B3213HABAS

B4213HABAS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	3,200 / 5.5
PUMP TYPE	Triplex
PUMP	CP CTB4S
PUMP CLASS	P8
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	174 lbs • 34" x 28" x 26"



B4213HABGS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	4,200 / 4.2
PUMP TYPE	Triplex
PUMP	General TSS1511
PUMP CLASS	P8
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	174 lbs • 34" x 28" x 26"

IN THE BOX

50' x 3/8" QC STEEL BRAIDED RUBBER HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

Ecom Ready Product New CP Pump



1 QUICK CONNECT NOZZLE GROMMETS

2 HOSE/WAND HOLDER

3 6.1 L (1.5 GAL) GAS TANK

4 TRIPLEX PUMP WITH EXTERNAL UNLOADER

5 ALUMINUM FRAME

6 BELT DRIVEN FOR LONGEVITY WITH LESS WEAR AND TEAR

7 2.5:1 BELT DRIVE RATIO

8 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES

9 STABILIZING RUBBER FEET

238

TRUCK MOUNT BELT DRIVE DEALER FRAME

Scan for full specs and
product comparisonsTMR / TRUCK
MOUNT
READY

TRIPLEX PUMP • EXTERNAL UNLOADER • TRUCK MOUNT READY • QUICK CONNECT FITTINGS

**B3213HTBAS****B4213HTBGS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / GPM	3,200 / 5.5
PUMP TYPE	Triplex
PUMP	CP CTB4S
PUMP CLASS	P8
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	158 lbs • 32" x 25" x 27"

Honda GX390 / 389CC

Recoil

4,200 / 4.2

Triplex

General TSS1511

P8

External

Adjustable

3 Yrs

158 lbs • 32" x 25" x 27"

**B3213HETBAS****B4213HETBGS**

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil & Electric
PSI / GPM	3,200 / 4.2
PUMP TYPE	Triplex
PUMP	CP CTB4S
PUMP CLASS	P8
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	158 lbs • 32" x 25" x 27"

Honda GX390 / 389CC

Recoil & Electric

4,200 / 4.2

Triplex

General TSS1511

P8

External

Adjustable

3 Yrs

158 lbs • 32" x 25" x 27"



IN THE BOX

 50' x 3/8" QC
STEEL BRAIDED
NON-MARKING
RUBBER HOSE

 36" QC INSULATED
GUN/WAND ASSEMBLY

 15°, 25°, 40° & SOAPER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

 Electric Start  New CP Pump

- 1** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 2** TRUCK MOUNT READY FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 3** POWDER COATED STEEL BASE PLATE
- 4** 6.1 L (1.5 GAL) GAS TANK
- 5** BELT DRIVEN FOR LONGEVITY WITH LESS WEAR AND TEAR
- 6** VENTED ALUMINUM BELT GUARD ATTACHED TO FRAME
- 7** VIBRATION-ABSORBING FEET

INDUSTRIAL SERIES

238

TRUCK MOUNT BELT DRIVE DEALER FRAME

Scan for full specs and
product comparisons

TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • TRUCK MOUNT READY • QUICK CONNECT FITTINGS




B4024HETBGS

B4024HETBGS

ENGINE	Honda GX690 / 688CC
START TYPE	Electric
PSI / GPM	4,000 / 8.2
PUMP TYPE	Triplex
PUMP	General TSF2021
PUMP CLASS	P10
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	185 lbs • 32" x 25" x 27"

B4224HETBAS

ENGINE	Honda GX690 / 688CC
START TYPE	Electric
PSI / GPM	4,200 / 8.5
PUMP TYPE	Triplex
PUMP	CP CTB2S
PUMP CLASS	P10
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	185 lbs • 35" x 25" x 27"

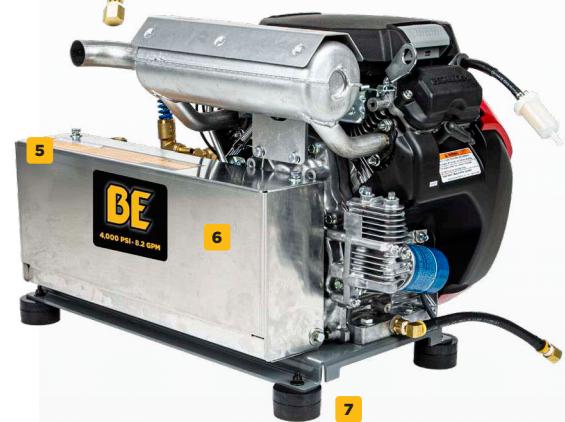

B5024HETBAS

B3528HETBGS

ENGINE	Honda GX690 / 688CC
START TYPE	Electric
PSI / GPM	5,000 / 5.0
PUMP TYPE	Triplex
PUMP	CP CTB3S
PUMP CLASS	P11
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	190 lbs • 35" x 25" x 27"

ENGINE	Honda IGX800 / 779CC
START TYPE	Electric
PSI / GPM	3,500 / 10.0
PUMP TYPE	Triplex
PUMP	General TSF2421
PUMP CLASS	P10
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	195 lbs • 32" x 25" x 27"



1 TRIPLEX PUMP WITH EXTERNAL UNLOADER

2 ELECTRIC START

3 TRUCK MOUNT READY FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES

4 POWDER COATED STEEL BASE PLATE

5 BELT DRIVEN FOR LONGEVITY WITH LESS WEAR AND TEAR

6 ALUMINUM BELT GUARD ATTACHED TO FRAME

7 VIBRATION-ABSORBING FEET

⚠ UNIT ONLY

Units are not equipped with accessories, fuel tank, and battery.

Electric Start New CP Pump



COLD WATER PRESSURE WASHERS

INDUSTRIAL
SERIES

204

4-WHEEL ROLL CAGE CONTRACTOR FRAME

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS



B5024HEBAS

ENGINE	Honda GX690 / 688CC
START TYPE	Electric
PSI / GPM	5,500 / 5.5
PUMP TYPE	Triplex
PUMP	CP CTB3S
PUMP CLASS	P11
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	(WHT & LxWxH)

426 lbs • 48" x 32" x 34"



B5024HEBAS



- 1** GUN/WAND HOLDER
- 2** 12V AGM DEEP CYCLE BATTERY
- 3** QUICK CONNECT NOZZLE GROMMETS
- 4** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 5** POWDER COATED STEEL FRAME
- 6** ANTI-ROLL BRAKE
- 7** 22.7 L (6 GAL) GAS TANK
- 8** BELT DRIVEN FOR LONGEVITY WITH LESS WEAR AND TEAR
- 9** 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES

IN THE BOX

50' x 3/8" QC
STEEL BRAIDED
RUBBER HOSE

36" QC INSULATED
GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

ECOM Ecom Ready Product Electric Start (with battery & bracket) New CP Pump

Scan for full specs and
product comparisons



COMMERCIAL SERIES

000

ROLL CAGE DEALER FRAME

Scan for full specs and
product comparisons



TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS



B3165HRAS

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	3,100 / 3.1
PUMP TYPE	Triplex
PUMP	CP CTG1S
PUMP CLASS	P3+
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING	106 lbs • 31" x 23" x 22"
(WHT & LxWxH)	



B3165HRAS

- 100' HOSE REEL
- QUICK CONNECT NOZZLE GROMMETS
- POWDER COATED STEEL ROLL CAGE FRAME
- 3.1 L (0.9 GAL) GAS TANK
- TRIPLEX PUMP WITH EXTERNAL UNLOADER
- TRUCK MOUNT READY FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES

IN THE BOX

50' x 3/8" QC
STEEL BRAIDED
RUBBER HOSE

36" QC INSULATED
GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAPER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

New CP Pump

SMELL GAS?

A SLIGHT GAS ODOR
DURING FUELING IS
COMPLETELY NORMAL.

WE RIGOROUSLY TEST
EVERY UNIT FOR PEAK
PERFORMANCE, THAT'S
WHAT MAKES US THE
BEST IN THE BUSINESS.



DISCOVER HOW A HINT
OF FUMES MEANS OUR
COMMITMENT TO QUALITY.

SCAN THE CODE TO WATCH OUR
PERFORMANCE TEST IN ACTION!



NOTICE / AVIS

SMELL GAS FUMES?
TO ENSURE THE HIGHEST LEVEL OF PERFORMANCE ON OUR EQUIPMENT, THERE IS A STRINGENT TESTING PROTOCOL THAT CAN LEAVE A TRACE RESIDUAL ODOR OF FUEL

VOUS SENTEZ DES VAPEURS D'ESSENCE ?
AFIN DE GARANTIR LE PLUS HAUT NIVEAU DE PERFORMANCE DES ÉQUIPEMENTS, NOUS AVONS UN PROTOCOLE DE TEST STRICT POUVANT LAISSER UNE TRACE D'ODEUR RÉSIDUELLE DE CARBURANT.

BEFORE USE • AVANT UTILISATION

- 1 ADD GAS
AJOUTER DE L'ESSENCE
- 2 ADD ENGINE OIL
AJOUTER DE L'HUILE À MOTEUR

ELECTRIC PRESSURE WASHERS



#THEPOWERYOU NEED

QUIET, EFFICIENT, AND BUILT TO PERFORM

BE electric pressure washers are ideal for indoor or noise-sensitive areas while delivering the power for tough outdoor jobs. From portable home units to heavy-duty dealer frames, there's a model for every need.

CONVENIENT AND USER-FRIENDLY

Auto start/stop motors conserve energy and extend pump life. Long power cords with GFCI plugs ensure safe operation.

PORTABLE TO PROFESSIONAL

Choose from lightweight workshop models with easy transport wheels, to rugged powder-coated steel frames and wall-mounted commercial units.

DURABLE PUMPS

Reliable axial pumps power the compact units, while premium triplex pumps provide long-lasting performance in professional and dealer-grade systems.

VERSATILE OPTIONS

Models include features like 2-in-1 carry/wall-mount designs, hose reels, soap tanks, and high-pressure foam cannons for specialized cleaning.

BUILT FOR DEMANDING APPLICATIONS

Commercial frames with Baldor motors and triplex pumps handle continuous use, with multiple voltage options to fit your facility.

CLEAN POWER

Electric models produce zero emissions, run quietly, and deliver consistent pressure, making them as efficient as they are effective.



WORKSHOP SERIES

DELTA

LIGHTWEIGHT & PORTABLE • POWEREASE MOTOR • AUTO START/STOP • AXIAL PUMP

DELTA

**P1715EN**

MOTOR	Powerease
HP / PHASE / AMP / RPM	1.3 / 1 / 11 / 3,450
VOLTAGE	120V
PSI / GPM	1,700 / 1.7
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	M22
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	19 lbs • 14" x 12" x 18"

P1915EN

MOTOR	Powerease
HP / PHASE / AMP / RPM	1.3 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	2,000 / 1.7
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	M22
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	25 lbs • 15" x 14" x 23"

RRP ECOM

RRP ECOM

DELTA+

**P2115EN**

MOTOR	Powerease
HP / PHASE / AMP / RPM	1.5 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	2,150 / 1.6
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	M22
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	35 lbs • 15" x 14" x 33"

RRP ECOM

IN THE BOX

Delta 20' x 1/4" PVC HOSE

SPLIT LANCE TRIGGER

15° & FOAM CANNON QC NOZZLES

Delta+ 25' x 1/4" PVC HOSE

SPLIT LANCE TRIGGER

15°, 25°, ROTARY TURBO & FOAM CANNON QC NOZZLES

RRP Retail Ready Packaging ECOM Ecom Ready Product

Scan for full specs and product comparisons



P2115EN



1 PULL ALONG HANDLE

2 NOZZLE GROMMETS

3 HOSE HOLDER

4 ON/OFF SWITCH

5 35' CORD LENGTH

6 GFCI PLUG

7 AXIAL PUMP WITH BUILT-IN UNLOADER

8 HIGH PRESSURE GUN LANCE

9 HIGH PRESSURE FOAM CANNON

10 6" WHEELS

SLIDER

LIGHTWEIGHT & PORTABLE • POWEREASE MOTOR • AUTO START/STOP • AXIAL PUMP

Scan for full specs and product comparisons



P2018EN

MOTOR

HP / PHASE / AMP / RPM

PowerEase

1.3 / 1 / 13 / 3,450

VOLTAGE

120V

PSI / GPM

2,000 / 1.8

PUMP TYPE

Axial

POWER CORD / PLUG

35' / GFCI

STARTER TYPE

Auto Start/Stop

FITTINGS

M22

UNLOADER

Built-In

INJECTOR

High Pressure Foam Cannon

WARRANTY

1 Yr / 5 Yrs Reg

SHIPPING (WHT & LxWxH)

33 lbs • 15" x 14" x 33"

RRP ECOM



P2018EN



PORTABLE DESIGN

The easy motion wheel system of the Slider provides smooth movement and reliable positioning.



- 1** HIGH PRESSURE GUN LANCE
- 2** HOSE HOLDER
- 3** AXIAL PUMP WITH BUILT-IN UNLOADER
- 4** SWIVEL WHEELS
- 5** 35' CORD LENGTH
- 6** GFCI PLUG
- 7** HIGH PRESSURE FOAM CANNON
- 8** 8" WHEELS

IN THE BOX

25' x 1/4" PVC HOSE

SPLIT LANCE TRIGGER

0°, 15°, 25°, 40°, ROTARY TURBO & FOAM CANNON QC NOZZLES

RRP Retail Ready Packaging **ECOM** Ecom Ready Product

WORKSHOP SERIES

DELTA DUO

2-IN-1 HAND CARRY DESIGN • POWEREASE MOTOR • AUTO START/STOP • AXIAL PUMP

Scan for full specs and product comparisons



P2314EN

MOTOR	PowerEase
HP / PHASE / AMP / RPM	1.6 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	2,300 / 1.7
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	M22
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	37 lbs • 25" x 16" x 17"

RRP ECOM



2-IN-1 DESIGN

The Delta Duo can stay mounted on the frame or be detached for portable use.



- 1 RUBBER GRIP
- 2 POWDER COATED STEEL FRAME
- 3 HIGH PRESSURE GUN LANCE
- 4 HOSE HOLDER
- 5 35' CORD LENGTH WITH GFCI PLUG
- 6 ON/OFF SWITCH
- 7 AXIAL PUMP WITH BUILT-IN UNLOADER
- 8 CARRY HANDLE
- 9 HIGH PRESSURE FOAM CANNON
- 10 ROTARY TURBO NOZZLE
- 11 8" WHEELS

IN THE BOX

25' x 1/4" PVC HOSE

SPLIT LANCE TRIGGER

0°, 15°, 25°, 40°, ROTARY TURBO & FOAM CANNON QC NOZZLES

RRP Retail Ready Packaging ECOM Ecom Ready Product



ELECTRIC PRESSURE WASHERS

WORKSHOP

SERIES

QUATTRO

SWIVEL WHEEL FRAME • POWEREASE MOTOR • AUTO START/STOP • AXIAL PUMP

QUATTRO



P2318EN

MOTOR	Powerease
HP / PHASE / AMP / RPM	1.6 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	2,350 / 1.8
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	M22
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	45 lbs • 24.5" x 16.5" x 17"

RRP ECOM



QUATTRO+



P2518EN

MOTOR	Powerease
HP / PHASE / AMP / RPM	2.0 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	2,500 / 1.8
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	M22
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	45 lbs • 24.5" x 16.5" x 17"

RRP ECOM



1 PULL ALONG HANDLE

2 35' CORD LENGTH WITH GFCI PLUG

3 ON/OFF SWITCH

4 AXIAL PUMP WITH BUILT-IN UNLOADER

5 HIGH PRESSURE GUN LANCE

6 NOZZLE GROMMETS

7 HOSE HOLDER

8 HIGH PRESSURE FOAM CANNON

9 4 LOCKABLE SWIVEL WHEELS

IN THE BOX

25' x 1/4" PVC HOSE

SPLIT LANCE TRIGGER

15°, 40° & FOAM CANNON QC NOZZLES

RRP Retail Ready Packaging **ECOM** Ecom Ready Product

Scan for full specs and
product comparisons



WORKSHOP SERIES

DELTA PRO

ROBUST POWDER COATED FRAME • INDUCTION MOTOR • AUTO START/STOP • AXIAL PUMP



P2317EN

MOTOR	PowerEase
HP / PHASE / AMP / RPM	2.0 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	2,300 / 1.7
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	33 lbs • 25" x 16" x 17"

RRP ECOM



P2713EN

MOTOR	PowerEase
HP / PHASE / AMP / RPM	2.0 / 1 / 15 / 3,450
VOLTAGE	120V
PSI / GPM	2,700 / 1.3
PUMP TYPE	Axial
POWER CORD / PLUG	35' / GFCI
STARTER TYPE	Auto Start/Stop
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	Built-In
INJECTOR	High Pressure Foam Cannon
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	46 lbs • 25" x 16" x 17"

RRP ECOM

IN THE BOX

25' x 1/4"
PVC HOSESPLIT LANCE
TRIGGER0°, 15°, 25°, 40°, ROTARY TURBO
& FOAM CANNON QC NOZZLES

RRP Retail Ready Packaging ECOM Ecom Ready Product

Scan for full specs and
product comparisons

- 1 RUBBER GRIP
- 2 NOZZLE GROMMETS
- 3 POWDER COATED STEEL FRAME
- 4 HOSE HOLDER
- 5 ROTARY TURBO NOZZLE
- 6 HIGH PRESSURE GUN LANCE
- 7 HIGH PRESSURE FOAM CANNON
- 8 ON/OFF SWITCH
- 9 INDUCTION MOTOR FOR INCREASED DURABILITY, EFFICIENCY & PERFORMANCE
- 10 AXIAL PUMP WITH BUILT-IN UNLOADER
- 11 35' CORD LENGTH WITH GFCI PLUG
- 12 8" WHEELS

DELTA TRIO

3-IN-1 DESIGN • POWEREASE MOTOR • INTEGRATED SOAP TANK OPTION • TRIPLEX PUMP



CAN: P1515EPN / USA: P1515EPNS

MOTOR	Powerease
HP / PHASE / AMP / RPM	1.5 / 1 / 13 / 3,450
VOLTAGE	120V
PSI / GPM	1,500 / 1.6
PUMP TYPE	Triplex
POWER CORD / PLUG	23' / Nema 5-15P / GFCI
STARTER TYPE	Toggle Switch
FITTINGS	M22
THERMAL RELIEF VALVE	Yes
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	52 lbs • 20" x 14" x 13"

ECOM



B1515EN



P1515EPNW

MOTOR	Powerease	Powerease
HP / PHASE / AMP / RPM	1.5 / 1 / 13 / 3,450	1.5 / 1 / 13 / 3,450
VOLTAGE	120V	120V
PSI / GPM	1,500 / 1.6	1,500 / 1.6
PUMP TYPE	Triplex	Triplex
POWER CORD / PLUG	25' / Nema 5-15P / GFCI	25' / Nema 5-15P / GFCI
STARTER TYPE	Toggle Switch	Toggle Switch
FITTINGS	M22	M22
THERMAL RELIEF VALVE	Yes	Yes
UNLOADER	Built-In	Built-In
INJECTOR	Fixed	Fixed
WARRANTY	1 Yr / 5 Yrs Reg	1 Yr / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	80 lbs • 23" x 22" x 20"	92 lbs • 19" x 15" x 25"

IN THE BOX

P1515EPN		25' x 1/4" TP HOSE		36" QC GUN/ WAND ASSEMBLY		VARIABLE M22 NOZZLE
P1515EPNS		25' x 1/4" RUBBER HOSE		36" QC GUN/ WAND ASSEMBLY		0°, 25°, 40° & SOAPER M22 NOZZLE
B1515EN		25' x 1/4" RUBBER HOSE		36" QC GUN/ WAND ASSEMBLY		0°, 25°, 40° & SOAPER M22 NOZZLE
P1515EPNW		50' x 1/4" STEEL BRAIDED RUBBER HOSE		36" QC GUN/ WAND ASSEMBLY		0°, 25°, 40° & SOAPER M22 NOZZLE

ECOM Ecom Ready Product

Scan for full specs and product comparisons



1 CARRY HANDLE

2 ON/OFF SWITCH

3 TRIPLEX PUMP WITH BUILT-IN UNLOADER

4 VIBRATION-ABSORBING FEET

5 HOSE REEL

6 HIGH PRESSURE GUN LANCE

7 25' CORD LENGTH WITH GFCI PLUG

8 INTEGRATED SOAP TANK

9 NOZZLE GROMMETS

10 HOSE HOLDER

11 POWDER COATED STEEL FRAME

12 10" PREMIUM FLAT FREE TIRES/WHEELS

13 STABILIZING RUBBER FEET

COMMERCIAL SERIES

124 DEALER FRAME

120V & 240V OPTIONS • BALDOR MOTOR • TRIPLEX PUMP • UNLOADER OPTIONS • 10" PREMIUM WHEELS

Scan for full specs and product comparisons



PE-1520EW1A

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	2.0 / 1 / 17.3 / 3,450
VOLTAGE	120V
PSI / GPM	1,500 / 2.0
PUMP	CP CTE1 Triplex Pump
POWER CORD / PLUG	6.5' / Nema 5-20P
STARTER TYPE	Toggle Switch
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	90 lbs • 24" x 20" x 24"



B205EG

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	5.0 / 1 / 22 / 3,450
VOLTAGE	240V
PSI / GPM	2,000 / 3.5
PUMP	General TT-2035 Triplex Pump
POWER CORD / PLUG	6.5' / Nema L6-30P
STARTER TYPE	Toggle Switch
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 3 Yrs
SHIPPING (WHT & LxWxH)	152 lbs • 32" x 25" x 27"

IN THE BOX



25' x 1/4" STEEL BRAIDED RUBBER HOSE



36" QC INSULATED GUN/WAND ASSEMBLY



0°, 25°, 40° & SOAPER QC NOZZLES

New CP Pump



1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 POWDER COATED STEEL FRAME

5 BALDOR MOTOR

6 TRIPLEX PUMP WITH EXTERNAL UNLOADER

7 10" PREMIUM FLAT FREE WHEELS/TIRES

8 STABILIZING RUBBER FEET



ELECTRIC PRESSURE WASHERS

COMMERCIAL
SERIES

125 DEALER FRAME

240V • BALDOR MOTOR • TRIPLEX PUMP • EXTERNAL UNLOADER • 10" PREMIUM WHEELS

Scan for full specs and
product comparisons



B205EA

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	5.0 / 1 / 23 / 1,725
VOLTAGE	240V
PSI / GPM	2,000 / 3.5
PUMP	CP CTE2S Triplex Pump
POWER CORD / PLUG	No Cord, Plug, or Switch
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	132 lbs • 32" x 25" x 27"



B2775EA

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	7.5 / 1 / 32 / 1,725
VOLTAGE	240V
PSI / GPM	2,700 / 3.5
PUMP	CP CTE2S Triplex Pump
POWER CORD / PLUG	No Cord, Plug, or Switch
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	132 lbs • 32" x 25" x 27"



B205EA

- 1** RUBBER GRIP
- 2** QUICK CONNECT NOZZLE GROMMETS
- 3** HOSE/WAND HOLDER
- 4** POWDER COATED STEEL FRAME
- 5** BALDOR MOTOR
- 6** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 7** 12" PREMIUM FLAT FREE WHEELS/TIRES
- 8** STABILIZING RUBBER FEET

IN THE BOX

50' x 3/8" STEEL BRAIDED RUBBER HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

0°, 25°, 40° & SOAPER QC NOZZLES

New CP Pump

Units do not include cord, plug, or switch

COMMERCIAL SERIES

125 DEALER FRAME

Scan for full specs and product comparisons



MULTIPLE VOLTAGE OPTIONS • BALDOR MOTOR • TRIPLEX PUMP • EXTERNAL UNLOADER • 10" PREMIUM WHEELS



B2775E3AHE

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	7.5 / 3 / 10.0-20.0 / 1,725
VOLTAGE	575V
PSI / GPM	2,700 / 3.5
PUMP	CP CTE2S Triplex Pump
POWER CORD / PLUG	No Cord, Plug, or Switch
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	132 lbs • 32" x 25" x 27"



B3010E34AHE

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	10.0 / 3 / 25.4-24.12 / 1,725
VOLTAGE	208-230V/460V
PSI / GPM	3,000 / 4.5
PUMP	CP CTE2S Triplex Pump
POWER CORD / PLUG	No Cord, Plug, or Switch
FITTINGS	QC
THERMAL RELIEF VALVE	Yes
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	132 lbs • 32" x 25" x 27"



B3010E34AHE

1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 POWDER COATED STEEL FRAME

5 BALDOR MOTOR

6 TRIPLEX PUMP WITH EXTERNAL UNLOADER

7 12" PREMIUM FLAT FREE WHEELS/TIRES

8 STABILIZING RUBBER FEET

IN THE BOX

50' x 3/8" STEEL BRAIDED RUBBER HOSE
36" QC INSULATED GUN/WAND ASSEMBLY
0°, 25°, 40° & SOAPER QC NOZZLES
New CP Pump

Units do not include cord, plug, or switch



ELECTRIC PRESSURE WASHERS

COMMERCIAL

SERIES

111 & 112 WALL MOUNT DEALER FRAME

COLD WATER SYSTEM • WALL MOUNTED • BALDOR MOTOR • AUTO START/STOP • TRIPLEX PUMP

Scan for full specs and
product comparisons



X-1520FW1ARH

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	2.0 / 1 / 17 / 3,450
VOLTAGE	120V
PSI / GPM	1,500 / 2.0
PUMP TYPE	Triplex
PUMP	CP CTE1
PUMP CLASS	P5
POWER CORD / PLUG	9 m SJOOW 12AWG / NEMA 5-20P
UNLOADER	Built-In
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	220 lbs • 40" x 22" x 32"



X-2050FW1A

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	5.0 / 1 / 23 / 1,725
VOLTAGE	230V
PSI / GPM	2,000 / 4.0
PUMP TYPE	Triplex
PUMP	CP CTE2S
PUMP CLASS	P6
POWER CORD / PLUG	9 m SJOOW 10AWG / No Plug
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	240 lbs • 40" x 22" x 32"




IN THE BOX

50' x 3/8"
STEEL BRAIDED
RUBBER HOSE

36" QC INSULATED
GUN/WAND ASSEMBLY

0°, 15°, 40° & SOAKER
QC NOZZLES

New CP Pump

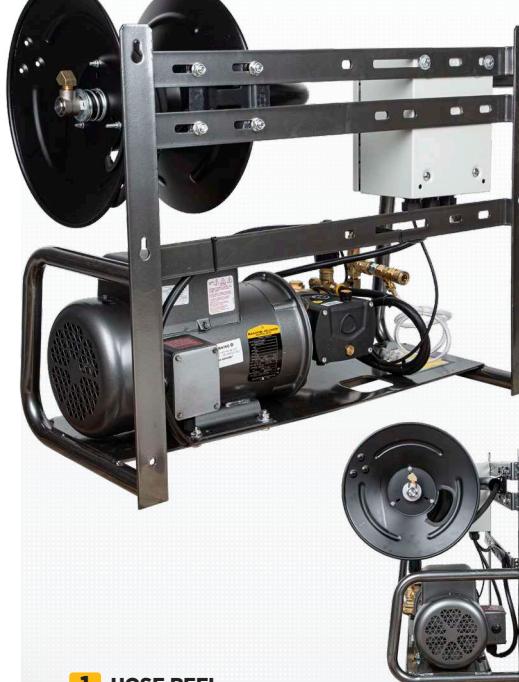

- 1** HOSE REEL
- 2** HOOKS FOR HOSE / WAND
- 3** CONTROL BOX WITH AUTO START/STOP SYSTEM
- 4** POWDER COATED STEEL FRAME
- 5** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 6** BALDOR MOTOR

COMMERCIAL SERIES

111 & 112 HI-TEMP WALL MOUNT DEALER FRAME

Scan for full specs and
product comparisons

ACCEPTS EXTERNALLY HEATED WATER • WALL MOUNTED • BALDOR MOTOR • AUTO START/STOP • TRIPLEX PUMP



ACCEPTS
EXTERNALLY
HEATED WATER UP
TO 185°F (85°C)*



X-1520FW1GENH

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	2.0 / 1 / 17 / 3,450
VOLTAGE	120V
PSI / GPM	1,500 / 2.0
PUMP TYPE	Triplex
PUMP	General ET1505E34
PUMP CLASS	P6
POWER CORD / PLUG	9 m SJOOW 12AWG / NEMA 5-20P
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 3 Yrs
SHIPPING (WHT & LxWxH)	220 lbs • 40" x 22" x 32"



ACCEPTS
EXTERNALLY
HEATED WATER UP
TO 185°F (85°C)*



X-2050FW1GENHT

MOTOR	Baldor Motor
HP / PHASE / AMP / RPM	5.0 / 1 / 23 / 1,725
VOLTAGE	230V
PSI / GPM	2,000 / 4.0
PUMP TYPE	Triplex
PUMP	General EPHT1812
PUMP CLASS	P7
POWER CORD / PLUG	9 m SJOOW 10AWG / No Plug
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	Motor: 2 Yrs • Pump: 3 Yrs
SHIPPING (WHT & LxWxH)	253 lbs • 40" x 22" x 32"

IN THE BOX

50' x 3/8"
STEEL BRAIDED
RUBBER HOSE



36" QC INSULATED
GUN/WAND ASSEMBLY



0°, 15°, 40° & SOAKER
QC NOZZLES

*These units do not heat water.

They are designed to operate with hot water supplied from an external source.



X-2050FW1GENHT



1 HOSE REEL

2 HOOKS FOR HOSE / WAND

3 CONTROL BOX WITH AUTO
START/STOP SYSTEM

4 POWDER COATED STEEL FRAME

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 BALDOR MOTOR

LIFETIME COIL WARRANTY ENGINEERED BY BE. GUARANTEED FOREVER.



Every BE Hot Water Pressure Washer is now equipped with a BE-built coil, engineered at our Tennessee plant and installed in our assembly plants across North America.

- Designed and manufactured by BE for maximum quality control
- Heavy-duty construction to withstand the toughest applications
- Confidence that only comes with BE engineering and guaranteed for life

BE QUALITY. PROTECTED FOR LIFE.

HOT WATER PRESSURE WASHERS



#THEPOWERYOU NEED

HOT WATER PRESSURE WASHERS

THE ULTIMATE SOLUTION FOR CUTTING THROUGH GREASE, OIL, AND GRIME.

WHY HOT WATER?

Hot water is a cleaning force multiplier. When combined with pressure and detergent, it breaks down grease, oil, and stubborn residue faster and more effectively than cold water. The result is shorter cleaning times, less chemical use, and deeper cleaning power.

KEY BENEFITS

- Faster Results:** Cuts through oil, grease, and grime that cold water can't touch.
- Lower Costs:** Reduces the need for harsh chemicals and saves labor time.
- Versatile Cleaning:** Handles everything from heavy equipment to shop floors.
- Professional Finish:** Leaves surfaces looking cleaner and more sanitary.

WHERE THEY EXCEL

Hot water pressure washers are the go-to choice in industries where performance and reliability matter most:

- Agriculture:** Clean mud, grease, and buildup from machinery and tools.
- Food Industry:** Maintain hygiene by degreasing kitchens, floors, and equipment.
- Construction:** Remove oil, grime, and concrete residue from tools and vehicles.
- Rental Fleets:** Offer customers a powerful cleaning option for tough jobs.
- Waste Management:** Keep refuse trucks and bins clean and safe.
- Mobile Services:** Contractors and detailers benefit from fast, effective cleaning.
- Manufacturing:** Essential for maintaining equipment and workspaces.

BUILT FOR EVERY JOB

BE OFFERS ONE OF THE MOST COMPLETE RANGES OF HOT WATER PRESSURE WASHERS AVAILABLE.



WHEELED UNITS
Portable and rugged for maximum flexibility.



SKID MOUNT UNITS
Ready for vehicle or trailer installations where mobility and durability are key.



HOT BOX UNITS
Convert existing cold water machines into powerful hot water systems.

WHY CHOOSE BE

Every BE hot water pressure washer is designed with:

- Heavy-duty triplex pumps for durability and performance.
- Efficient diesel fired, natural gas fired, or liquid propane fired burners that heat water up to 200°F / 93°C.
- Powder-coated steel frames for protection and long life.
- User-friendly controls including adjustable thermostats and safety features.
- Lifetime coil warranty on all hot water models.

WATCH TECH TALKS



HOT WATER PRESSURE WASHER START UP



HOT WATER PRESSURE WASHER SHUTDOWN



HOT WATER PRESSURE WASHER SOAP INJECTOR





HOT WATER PRESSURE WASHERS

COMMERCIAL
SERIES

HOT WATER GAS DIRECT DRIVE / DIESEL FIRED

Scan for full specs and
product comparisons



TMR / TRUCK
MOUNT
READY

TRIPLEX PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS



HW3665HA

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	3,600 / 2.5
PUMP	Triplex CP CTG1
PUMP CLASS	P3
BURNER	12V Wayne Burner
BATTERY	55AH AGM Deep Cycle Battery Included
MAX TEMP.	93°C / 200°F
BTU OUTPUT	250,000
COIL	80' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	22.7 L / 6 Gal Black Poly
ENGINE FUEL TANK	3.1 L / 0.9 Gal
ADJUSTABLE THERMOSTAT	Yes
HOUR METER	Yes
PRESSURE SWITCH	Yes
THERMAL RELIEF VALVE	Yes
ROCKER BURNER SWITCH	Yes
INLINE FUEL FILTER	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: No
ADJUSTABLE INJECTOR	Yes
UNLOADER	Built-In
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	480 lbs • 45" x 33" x 52"

ECOM



- 1 80' COIL WITH STAINLESS STEEL WRAP
- 2 CENTER-BALANCED LIFT POINT
- 3 POWDER COATED STEEL FRAME
- 4 TRIPLEX PUMP WITH BUILT-IN UNLOADER
- 5 QUICK-CONNECT NOZZLE GROMMETS
- 6 55 AH AGM DEEP CYCLE BATTERY INCLUDED
- 7 12V WAYNE BURNER
- 8 DETACHABLE WHEELS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 9 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 10 ADJUSTABLE THERMOSTAT

IN THE BOX

50' x 3/8" QC DOUBLE BRAIDED STEEL WIRE HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

0°, 15°, 25°, 40° & SOAKER QC NOZZLES

ECOM Ecom Ready Product New CP Pump

COMMERCIAL SERIES

HOT WATER

GAS DIRECT DRIVE / DIESEL FIRED

Scan for full specs and product comparisons



TMR / TRUCK MOUNT READY

TRIPLEX PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 13" ULTRA PREMIUM WHEELS



HW4415PA

ENGINE	Powersease 420 / 420CC
START TYPE	Recoil & Electric
PSI / GPM	4,400 / 4.2
PUMP	Triplex CP CTG2
PUMP CLASS	P4
BURNER	12V Beckett Burner
BATTERY	55AH AGM Deep Cycle Battery Included
MAX TEMP.	93°C / 200°F
BTU OUTPUT	330,000
COIL	96' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	37.85 L / 10 Gal Black Poly
ENGINE FUEL TANK	6.7 L / 1.77 Gal
ADJUSTABLE THERMOSTAT	Yes
HOUR METER	Yes
PRESSURE SWITCH	Yes
THERMAL RELIEF VALVE	Yes
ROCKER BURNER SWITCH	Yes
INLINE FUEL FILTER	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: No
ADJUSTABLE INJECTOR	Yes
UNLOADER	Built-In
WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	580 lbs • 45" x 33" x 52"

Ecom



- 1 96' COIL WITH STAINLESS STEEL WRAP
- 2 CENTER-BALANCED LIFT POINT
- 3 POWDER COATED STEEL FRAME
- 4 TRIPLEX PUMP WITH BUILT-IN UNLOADER
- 5 QUICK-CONNECT NOZZLE GROMMETS
- 6 55 AH AGM DEEP CYCLE BATTERY INCLUDED
- 7 12V BECKETT BURNER
- 8 DETACHABLE WHEELS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 9 13" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 10 ADJUSTABLE THERMOSTAT

IN THE BOX

50' x 3/8" QC DOUBLE BRAIDED STEEL WIRE HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

0°, 15°, 25°, 40° & SOAKER QC NOZZLES

Ecom Ready Product Electric Start (with battery & bracket) New CP Pump

HOT WATER

GAS DIRECT DRIVE / DIESEL FIRED

Scan for full specs and
product comparisons



TMR / TRUCK MOUNT READY

TRIPLEX PUMP • UNLOADER OPTIONS • QUICK CONNECT FITTINGS • 13" ULTRA PREMIUM WHEELS



HW4213HA

HW4013HG

ENGINE	Honda GX390 / 389CC	
START TYPE	Recoil & Electric	
PSI / GPM	4,200 / 4.2	4,000 / 4.2
PUMP	Triplex CP CTG2	Triplex General EZ4040
PUMP CLASS	P4	P4+
BURNER	12V Beckett Burner	12V Beckett Burner
BATTERY	55AH AGM Deep Cycle Battery Included	55AH Marine Battery Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	330,000	330,000
COIL	96' x 1/2" Sch. 80 Cold Rolled Steel	96' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	37.85 L / 10 Gal Black Poly	37.85 L / 10 Gal Black Poly
ENGINE FUEL TANK	6.1 L / 1.6 Gal	6.1 L / 1.6 Gal
ADJUSTABLE THERMOSTAT	Yes	Yes
HOUR METER	Yes	Yes
PRESSURE SWITCH	Yes	Yes
THERMAL RELIEF VALVE	Yes	Yes
ROCKER BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: No	Engine: Yes • Pump: No
ADJUSTABLE INJECTOR	Yes	Yes
UNLOADER	Built-In	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	580 lbs • 45" x 33" x 52"	580 lbs • 45" x 33" x 52"

ECOM



HW4213HA



1 96' COIL WITH STAINLESS STEEL WRAP

2 CENTER-BALANCED LIFT POINT

3 POWDER COATED STEEL FRAME

4 TRIPLEX PUMP

5 QUICK-CONNECT NOZZLE GROMMETS

6 55 AH AGM DEEP CYCLE BATTERY INCLUDED

7 12V BECKETT BURNER

8 DETACHABLE WHEELS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES

9 13" ULTRA PREMIUM FLAT FREE WHEELS/TIRES

10 ADJUSTABLE THERMOSTAT

IN THE BOX

50' x 3/8" QC DOUBLE BRAIDED STEEL WIRE HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

0°, 15°, 25°, 40° & SOAKER QC NOZZLES

ECOM Ecom Ready Product Electric Start (with battery & bracket) New CP Pump

INDUSTRIAL SERIES

HOT WATER

GAS BELT DRIVE / DIESEL FIRED

Scan for full specs and
product comparisons



TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 13" ULTRA PREMIUM WHEELS



HW4213HBGS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil & Electric
PSI / GPM	4,200 / 4.2
PUMP	Triplex General TSS1511
PUMP CLASS	P8
BURNER	12V Beckett Burner
BATTERY	55AH Marine Battery Included
MAX TEMP.	93°C / 200°F
BTU OUTPUT	330,000
COIL	96' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	37.85 L / 10 Gal Black Poly
ENGINE FUEL TANK	6.1 L / 1.6 Gal
ADJUSTABLE THERMOSTAT	Yes
HOUR METER	Yes
PRESSURE SWITCH	Yes
THERMAL RELIEF VALVE	Yes
ROCKER BURNER SWITCH	Yes
INLINE FUEL FILTER	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: No
ADJUSTABLE INJECTOR	Yes
UNLOADER	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	580 lbs • 45" x 33" x 52"




HW4213HBGS



- 1 96' COIL WITH STAINLESS STEEL WRAP
- 2 CENTER-BALANCED LIFT POINT
- 3 POWDER COATED STEEL FRAME
- 4 TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 5 QUICK-CONNECT NOZZLE GROMMETS
- 6 55AH MARINE BATTERY INCLUDED
- 7 12V BECKETT BURNER
- 8 DETACHABLE WHEELS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 9 13" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 10 ADJUSTABLE THERMOSTAT

IN THE BOX



50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE



47" QC INSULATED
GUN/WAND ASSEMBLY



0°, 15°, 25°, 40° &
SOAPER QC NOZZLES

Electric Start (with battery & bracket)

HOT WATER


GAS BELT DRIVE / DIESEL FIRED / SKID

Scan for full specs and
product comparisons



TMR / TRUCK
MOUNT
READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS

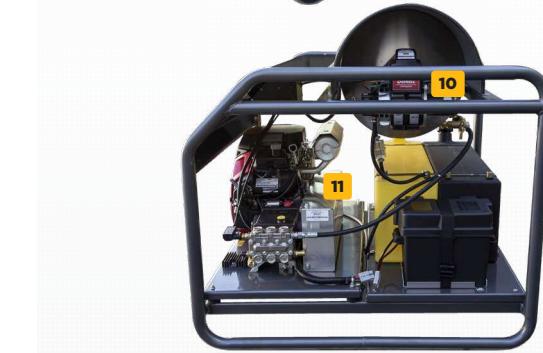

	HW3524HG12V	HW4024HA12V
ENGINE	Honda GX690 / 688CC	Honda GX690 / 688CC
START TYPE	Electric	Electric
PSI / GPM	3,500 / 5.6	4,000 / 5.5
PUMP	Triplex General TS2021	Triplex CP CTB4S
PUMP CLASS	P8	P8
BURNER	12V Beckett Burner	12V Beckett Burner
BATTERY	55AH Marine Battery Included	55AH Marine Battery Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	315,000	315,000
COIL	96' x 1/2" Sch. 80 Cold Rolled Steel	96' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	54.5 L / 14.4 Gal Yellow Poly	54.5 L / 14.4 Gal Yellow Poly
ENGINE FUEL TANK	54.5 L / 14.4 Gal Black Poly	54.5 L / 14.4 Gal Black Poly
ADJUSTABLE THERMOSTAT	Yes	Yes
HOUR METER & TACHOMETER	Yes / Yes	Yes / Yes
PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
THERMAL RELIEF VALVE	Yes	Yes
ROCKER BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: Yes	Engine: Yes • Pump: Yes
ADJUSTABLE INJECTOR	Yes	Yes
UNLOADER	External	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	977 lbs • 48" x 46" x 51"	978 lbs • 48" x 46" x 51"



- 1** 96' COIL WITH STAINLESS STEEL WRAP
- 2** POWDER COATED STEEL FRAME
- 3** QUICK-CONNECT NOZZLE GROMMETS
- 4** TACHOMETER AND HOUR METER
- 5** ADJUSTABLE THERMOSTAT WITH ON/OFF
ROCKER SWITCH
- 6** ELECTRIC START
- 7** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 8** 55 AH AGM DEEP CYCLE BATTERY INCLUDED
- 9** EASY BOLT-DOWN INSTALLATION ON
VEHICLES
- 10** 12V BECKETT BURNER
- 11** BELT DRIVE

IN THE BOX

50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE

47" QC INSULATED
GUN/WAND ASSEMBLY

0°, 15°, 25°, 40° &
SOAPER QC NOZZLES

Electric Start (with battery & bracket) New CP Pump

INDUSTRIAL SERIES

Scan for full specs and product comparisons



HOT WATER

GAS BELT DRIVE / DIESEL FIRED / SKID

TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS



HW3024HG12V



	HW3024HG12V	HW3524HA12V
ENGINE	Honda GX690 / 688CC	Honda GX690 / 688CC
START TYPE	Electric	Electric
PSI / GPM	3,000 / 8.0	3,500 / 8.5
PUMP	Triplex General TSF2021	Triplex CP CTB2S
PUMP CLASS	P10	P10
BURNER	12V Beckett Burner	12V Beckett Burner
BATTERY	55AH Marine Battery Included	55AH Marine Battery Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	315,000	315,000
COIL	96' x 1/2" Sch. 80 Cold Rolled Steel	96' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	54.5 L / 14.4 Gal Yellow Poly	54.5 L / 14.4 Gal Yellow Poly
ENGINE FUEL TANK	54.5 L / 14.4 Gal Black Poly	54.5 L / 14.4 Gal Black Poly
ADJUSTABLE THERMOSTAT	Yes	Yes
HOUR METER & TACHOMETER	Yes / Yes	Yes / Yes
PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
THERMAL RELIEF VALVE	Yes	Yes
ROTARY CAM / ROCKER BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: Yes	Engine: Yes • Pump: Yes
ADJUSTABLE INJECTOR	Yes	Yes
UNLOADER	External	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	975 lbs • 48" x 46" x 51"	976 lbs • 48" x 46" x 51"



IN THE BOX

50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE

47" QC INSULATED
GUN/WAND ASSEMBLY

0°, 15°, 25°, 40° &
SOAPER QC NOZZLES

Electric Start (with battery & bracket) New CP Pump

- 1 96' COIL WITH STAINLESS STEEL WRAP
- 2 POWDER COATED STEEL FRAME
- 3 QUICK-CONNECT NOZZLE GROMMETS
- 4 TACHOMETER AND HOUR METER
- 5 ADJUSTABLE THERMOSTAT WITH ON/OFF ROCKER SWITCH
- 6 ELECTRIC START
- 7 TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 8 55 AH AGM DEEP CYCLE BATTERY INCLUDED
- 9 EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 10 12V BECKETT BURNER
- 11 BELT DRIVE

HOT WATER

GAS BELT DRIVE / DIESEL FIRED / SKID

Scan for full specs and
product comparisons



TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS

Units meet CSA standards but
are not CSA certified.*



SE5815HIHZGP

ENGINE	Honda IGX800 / 779CC
START TYPE	Electric
PSI / GPM	3,000 / 10.0
PUMP	Triplex General TSF2421
PUMP CLASS	P10
BURNER	12V Beckett Burner
BATTERY	Group 24 Deep Cycle Battery Not Included
MAX TEMP.	93°C / 200°F
BTU OUTPUT	420,000
COIL	238' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	45.42 L / 12 Gal Black Poly
ENGINE FUEL TANKS	2 x 24.6 L / 6.5 Gal
ADJUSTABLE THERMOSTAT	Yes
HOUR METER	Yes
FLOW / PRESSURE SWITCH	Yes
PRESSURE RELIEF VALVE	Yes
DIAGNOSTIC LIGHTS	Yes
ROTARY CAM / ROCKER	
BURNER SWITCH	Yes
INLINE FUEL FILTER	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: Yes
ADJUSTABLE INJECTOR	Optional
UNLOADER	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	940 lbs • 60" x 53" x 63"



AVAILABLE OPTIONS:

- Removable Horizontal Rain Cap
- Downstream Injection

IN THE BOX

50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE


48" QC INSULATED
GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start (Group 24 deep cycle battery required)



SE5815HIHZGP

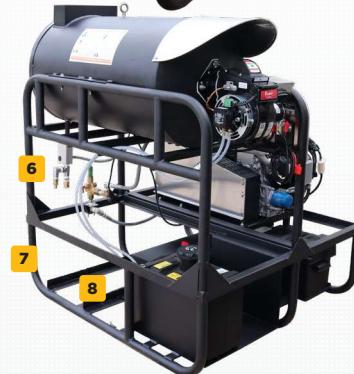

- 1 STAINLESS STEEL CONTROL PANEL AND BURNER COVER
- 2 12V BECKETT BURNER
- 3 238' COIL WITH PAINTED STEEL WRAP
- 4 TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 5 BELT DRIVE GAS ENGINE WITH ELECTRIC START
- 6 PAC INLINE THERMOSTAT
- 7 POWDER COATED STEEL FRAME
- 8 BUILT-IN MOUNTING TABS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES

INDUSTRIAL SERIES

Scan for full specs and product comparisons



HOT WATER

DIESEL BELT DRIVE / DIESEL FIRED / SKID

TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS

Units meet CSA standards but are not CSA certified.*



	5640DG	5835DG
ENGINE	Diesel KDW702 / 686CC	Diesel KDW1003 / 1028CC
START TYPE	Electric	Electric
PSI / GPM	3,500 / 5.2	3,500 / 8.0
PUMP	Triplex General TS2021	Triplex General TSF2021
PUMP CLASS	P8	P10
BURNER	12V Beckett Burner	12V Beckett Burner
BATTERY	Group 24 Deep Cycle Battery Not Included	Group 24 Deep Cycle Battery Not Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	350,000	420,000
COIL	175' x 1/2" Sch. 80 Cold Rolled Steel	238' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	45.42 L / 12 Gal Black Poly	45.42 L / 12 Gal Black Poly
ENGINE FUEL TANK	45.42 L / 12 Gal	45.42 L / 12 Gal
ADJUSTABLE THERMOSTAT	Yes	Yes
HOUR METER	Yes	Yes
FLOW / PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
DIAGNOSTIC LIGHTS	Yes	Yes
TOGGLE BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
OIL DRAIN HOSES	Engine: No • Pump: No	Engine: No • Pump: No
ADJUSTABLE INJECTOR	Optional	Optional
UNLOADER	External	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	1205 lbs • 61" x 53" x 64"	1297 lbs • 60" x 52" x 64"



AVAILABLE OPTIONS:

- Removable Horizontal Rain Cap
- Downstream Injection

IN THE BOX



Electric Start (Group 24 deep cycle battery required)



1 STAINLESS STEEL CONTROL PANEL AND BURNER COVER

2 12V BECKETT BURNER

3 175' COIL WITH PAINTED STEEL WRAP (5640DG)
3 238' COIL WITH PAINTED STEEL WRAP (15835DG)

4 PAC INLINE THERMOSTAT

5 BELT DRIVE DIESEL ENGINE WITH ELECTRIC START

6 TRIPLEX PUMP

7 POWDER COATED STEEL FRAME

8 BUILT-IN MOUNTING TABS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES

HOT WATER

GAS BELT DRIVE / DIESEL FIRED / SKID

Scan for full specs and
product comparisons



TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS

Units meet CSA standards but
are not CSA certified.*



	Z5535APBDV	Z5535APBDH
ENGINE	Vanguard 18 / 570CC	Honda GX690 / 688CC
START TYPE	Recoil & Electric	Electric
PSI / GPM	3,500 / 5.2	3,500 / 5.2
PUMP	Triplex CP CTB2S	Triplex CP CTB2S
PUMP CLASS	P10	P10
BURNER	12V Beckett Burner	12V Beckett Burner
BATTERY	Group 24 Deep Cycle Battery Not Included	Group 24 Deep Cycle Battery Not Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	315,000	315,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	45.42 L / 12 Gal Black Poly	45.42 L / 12 Gal Black Poly
ENGINE FUEL TANKS	24.6 L / 6.5 Gal	24.6 L / 6.5 Gal
ADJUSTABLE THERMOSTAT	Yes	Yes
HOUR METER & TACHOMETER	Yes / Yes	Yes / No
PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
DIAGNOSTIC LIGHTS	Yes	Yes
TOGGLE BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: Yes	Engine: Yes • Pump: Yes
ADJUSTABLE INJECTOR	No	No
UNLOADER	External	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	700 lbs • 60" x 52" x 59"	700 lbs • 60" x 52" x 59"



Z5535APBDV

AVAILABLE OPTIONS:

- Removable Horizontal Rain Cap
- Downstream Injection

IN THE BOX

50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE

48" QC INSULATED
GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start (Group 24 deep cycle battery required) New CP Pump

1 147' COIL WITH STAINLESS STEEL WRAP

2 PAC INLINE ADJUSTABLE THERMOSTAT

3 DIAGNOSTIC LIGHTS

4 BELT DRIVE

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 POWDER COATED STEEL FRAME

7 12V BECKETT BURNER

8 BUILT-IN MOUNTING TABS FOR EASY
BOLT-DOWN INSTALLATION ON VEHICLES

INDUSTRIAL SERIES

Scan for full specs and product comparisons



HOT WATER

GAS BELT DRIVE / DIESEL FIRED / SKID

TMR / TRUCK MOUNT READY

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS

Units meet CSA standards but are not CSA certified.*



	Z5535GPBDV	Z5535GPBDH
ENGINE	Vanguard 18 / 570CC	Honda GX690 / 688CC
START TYPE	Recoil & Electric	Electric
PSI / GPM	3,500 / 5.2	3,500 / 5.2
PUMP	Triplex General TS2021	Triplex General TS2021
PUMP CLASS	P8	P8
BURNER	12V Beckett Burner	12V Beckett Burner
BATTERY	Group 24 Deep Cycle Battery Not Included	Group 24 Deep Cycle Battery Not Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	315,000	315,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	45.42 L / 12 Gal Black Poly	45.42 L / 12 Gal Black Poly
ENGINE FUEL TANKS	24.6 L / 6.5 Gal	24.6 L / 6.5 Gal
ADJUSTABLE THERMOSTAT	Yes	Yes
HOUR METER & TACHOMETER	Yes / Yes	Yes / No
PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
DIAGNOSTIC LIGHTS	Yes	Yes
TOGGLE BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
OIL DRAIN HOSES	Engine: Yes • Pump: Yes	Engine: Yes • Pump: Yes
ADJUSTABLE INJECTOR	No	No
UNLOADER	External	External
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Engine: 3 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	700 lbs • 60" x 52" x 59"	700 lbs • 60" x 52" x 59"



AVAILABLE OPTIONS:

- Removable Horizontal Rain Cap
- Downstream Injection

IN THE BOX

50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE

48" QC INSULATED
GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start (Group 24 deep cycle battery required)



Z5535GPBDV

1 147' COIL WITH STAINLESS STEEL WRAP

2 PAC INLINE ADJUSTABLE THERMOSTAT

3 DIAGNOSTIC LIGHTS

4 BELT DRIVE

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 POWDER COATED STEEL FRAME

7 12V BECKETT BURNER

8 BUILT-IN MOUNTING TABS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES

HOT WATER

ELECTRIC DIRECT DRIVE / DIESEL FIRED

Scan for full specs and
product comparisons



TMR / TRUCK
MOUNT READY

120V • TRIPLEX PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS



SPE-1000 certified
in Canada only.



HW152EA

MOTOR	TechTop
VOLTAGE	120V
HP / PHASE / AMPS / RPM	2 / 1 / 20 / 3,450
PSI / GPM	1,500 / 2.0
PUMP	Triplex CP CTE1
PUMP CLASS	P5
BURNER	120V AC Wayne Burner
MAX TEMP.	89°C / 193°F
BTU OUTPUT	172,000
COIL	80' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	22.7 L / 6 Gal Black Poly
ADJUSTABLE THERMOSTAT	Yes
HOUR METER & TACHOMETER	Yes / No
FLOW / PRESSURE SWITCH	Yes
THERMAL RELIEF VALVE	Yes
DIAGNOSTIC LIGHTS	Yes
ROTARY CAM / ROCKER BURNER SWITCH	Yes
INLINE FUEL FILTER	Yes
CORD / PLUG TYPE	26' / NEMA 5-20
UNLOADER	Built-In
OIL DRAIN HOSES	Engine: N/A • Pump: Yes
ADJUSTABLE INJECTOR	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	390 lbs • 43" x 30" x 37"



HW152EA



- 1 80' COIL WITH STAINLESS STEEL WRAP
- 2 CENTER-BALANCED LIFT POINT
- 3 POWDER COATED STEEL FRAME
- 4 TRIPLEX PUMP WITH BUILT-IN UNLOADER
- 5 QUICK-CONNECT NOZZLE GROMMETS
- 6 POLY DIESEL TANK
- 7 120V AC WAYNE BURNER
- 8 DETACHABLE WHEELS FOR EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 9 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 10 ADJUSTABLE THERMOSTAT
- 11 ANTI-ROLL BRAKE

IN THE BOX

50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE

36" QC INSULATED
GUN/WAND ASSEMBLY

0°, 15°, 25°, 40° &
SOAPER QC NOZZLES

Electric Start New CP Pump

INDUSTRIAL SERIES

HOT WATER

ELECTRIC BELT DRIVE / DIESEL FIRED

120V & 230V OPTIONS • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS

Units meet CSA standards but are not CSA certified.*



	15-281	15-423
MOTOR	Baldor	Baldor
VOLTAGE	120V	230V
HP / PHASE / AMPS / RPM	2 / 1 / 20 / 1,725	6 / 1 / 28 / 1,725
PSI / GPM	1,000 / 2.2	2,300 / 4.0
PUMP	Triplex General EZ2536S	Triplex General TSS1511
PUMP CLASS	-	P8
BURNER	115V Beckett Burner	230V Beckett Burner
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	245,000	315,000
COIL	93' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	26.5 L / 7 Gal Black Poly	26.5 L / 7 Gal Black Poly
ADJUSTABLE THERMOSTAT	No	Yes
AUTO START/STOP	No	Optional
TIME DELAY SHUTDOWN	No	Optional
HIGH LIMIT SWITCH	Yes	No
FLOW / PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
ROTARY CAM BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
CORD / PLUG TYPE	35' / GFCI	35' / GFCI
UNLOADER	External	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	490 lbs • 67" x 41" x 57"	650 lbs • 67" x 41" x 57"



AVAILABLE OPTIONS ON 15-423:

- Auto Start/Stop
- Time Delayed Shutdown
- Push Button Restart

IN THE BOX



Electric Start

Scan for full specs and product comparisons



1 93' COIL WITH STAINLESS STEEL WRAP (15-281)

147' COIL WITH STAINLESS STEEL WRAP (15-423)

2 CENTER-BALANCED LIFT POINT

3 PAC INLINE THERMOSTAT (15-423)

4 POLY DIESEL TANK

5 BELT DRIVE

6 TRIPLEX PUMP WITH EXTERNAL UNLOADER

7 POWDER COATED STEEL FRAME

8 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES

9 115V BECKETT BURNER (15-281)
230V BECKETT BURNER (15-423)

10 ANTI-ROLL BRAKE



HOT WATER PRESSURE WASHERS

INDUSTRIAL
SERIES

HOT WATER ELECTRIC BELT DRIVE / DIESEL FIRED

230V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS

Units meet CSA standards but are not CSA certified.*



	15-520	15-530
MOTOR	Baldor	Baldor
VOLTAGE	230V	230V
HP / PHASE / AMPS / RPM	7.5 / 1 / 36 / 1,725	10 / 1 / 46 / 1,750
PSI / GPM	2,000 / 5.0	3,000 / 5.0
PUMP	Triplex General TS2021	Triplex General TS2021
PUMP CLASS	P8	P8
BURNER	230V Beckett Burner	230V Beckett Burner
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	315,000	315,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	26.5 L / 7 Gal Black Poly	26.5 L / 7 Gal Black Poly
ADJUSTABLE THERMOSTAT	Yes	Yes
AUTO START/STOP	Optional	Optional
TIME DELAY SHUTDOWN	Optional	Optional
FLOW SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
ROTARY CAM BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
CORD / PLUG TYPE	10' / No Plug	10' / No Plug
UNLOADER	External	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	675 lbs • 67" x 41" x 57"	715 lbs • 67" x 41" x 57"



AVAILABLE OPTIONS:

- Auto Start/Stop
- Time Delayed Shutdown
- Push Button Restart

IN THE BOX

15-520 50' x 3/8" QC SINGLE BRAIDED STEEL WIRE HOSE

48" QC INSULATED GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

15-530 50' x 3/8" QC DOUBLE BRAIDED STEEL WIRE HOSE

48" QC INSULATED GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start

Scan for full specs and product comparisons



- 1 147' COIL WITH STAINLESS STEEL WRAP
- 2 CENTER-BALANCED LIFT POINT
- 3 PAC INLINE THERMOSTAT
- 4 POLY DIESEL TANK
- 5 BELT DRIVE
- 6 TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 7 POWDER COATED STEEL FRAME
- 8 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 9 230V BECKETT BURNER
- 10 ANTI-ROLL BRAKE

*Any required certification is the responsibility of the purchaser/installer. BE Power Equipment accepts no liability for certification or related costs.

COMMERCIAL SERIES

Scan for full specs and product comparisons



HOT WATER

ELECTRIC DIRECT DRIVE / DIESEL FIRED

120V & 230V OPTIONS • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 10" PREMIUM WHEELS

Units meet CSA standards but are not CSA certified.*



	1250	42-6
MOTOR	Baldor	Baldor
VOLTAGE	120V	230V
HP / PHASE / AMPS / RPM	2 / 1 / 20 / 1,725	6 / 1 / 28 / 1,750
PSI / GPM	1,000 / 2.0	2,300 / 4.0
PUMP	Triplex General T9051EBF	Triplex General EZ2542E
PUMP CLASS	-	-
BURNER	120V Beckett Burner	230V Beckett Burner
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	210,000	315,000
COIL	63' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	26.5 L / 7 Gal Black Poly	26.5 L / 7 Gal Black Poly
ADJUSTABLE THERMOSTAT	No	Yes
AUTO START/STOP	Optional	Optional
TIME DELAY SHUTDOWN	Optional	Optional
HIGH LIMIT SWITCH	Yes	No
PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
ROTARY CAM BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
CORD / PLUG TYPE	35' / GFCI	35' / GFCI
UNLOADER	External	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	425 lbs • 48" x 33" x 62"	545 lbs • 48" x 33" x 62"



AVAILABLE OPTIONS:

- Auto Start/Stop
- Time Delayed Shutdown
- Push Button Restart

IN THE BOX



15° & 25° QC NOZZLES

Electric Start New CP Pump

*Any required certification is the responsibility of the purchaser/installer.
BE Power Equipment accepts no liability for certification or related costs.



1 63' COIL WITH STAINLESS STEEL WRAP (1250)

147' COIL WITH STAINLESS STEEL WRAP (42-6)

2 PAC INLINE THERMOSTAT (42-6)

3 35' POWER CORD WITH GFCI

4 POLY DIESEL TANK

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 POWDER COATED STEEL FRAME

7 120V BECKETT BURNER (1250)

230V BECKETT BURNER (42-6)

8 10" PREMIUM FLAT FREE WHEELS/TIRES

Scan for full specs and product comparisons



HOT WATER

ELECTRIC BELT DRIVE / NATURAL GAS OR LP FIRED

208V-230V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • ADJUSTABLE TIME DELAY SHUTDOWN

Units meet CSA standards but are not CSA certified.*



	64HD	64HD-3
MOTOR	Baldor	Baldor
VOLTAGE	208V-230V (To be specified)	208V-230V (To be specified)
HP / PHASE / AMPS / RPM	6 / 1 / 26-25 / 1,750	5 / 3 / 17-16 / 1,750
PSI / GPM	2,300 / 4.0	2,000 / 4.0
PUMP	Triplex General TSS1511	Triplex General TSS1511
PUMP CLASS	P8	P8
BURNER	Electronic Ignitor/Natural Gas or LP Burner System	Electronic Ignitor/Natural Gas or LP Burner System
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	385,000	385,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
ADJUSTABLE THERMOSTAT	Yes	Yes
TIME DELAY SHUTDOWN	Yes	Yes
HOUR METER	Yes	Yes
FLOW SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
ROTARY CAM / ROCKER BURNER SWITCH	Yes	Yes
CORD / PLUG TYPE	10' / No Plug	10' / No Plug
UNLOADER	External	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	700 lbs • 60" x 40" x 67"	700 lbs • 60" x 40" x 67"



AVAILABLE OPTIONS:

- Remote Station with Start/Stop/Restart, Burner On/Off, and Detergent On/Off functions. Standard 10' lead wire is included, and longer lengths can be installed at an additional cost.
- Draft diverter.
- Oil fired burner upgrade.

IN THE BOX

50' x 3/8" QC SINGLE BRAIDED STEEL WIRE HOSE

48" QC INSULATED GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start

- 1** 147' COIL WITH STAINLESS STEEL WRAP
- 2** PAC INLINE ADJUSTABLE THERMOSTAT
- 3** 3 POSITION CAM SWITCH WITH OFF/PUMP/BURNER
- 4** POWDER COATED STEEL FRAME
- 5** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 6** ELECTRONIC IGNITOR WITH NATURAL GAS OR LP BURNER SYSTEM

INDUSTRIAL SERIES

Scan for full specs and product comparisons



HOT WATER

ELECTRIC BELT DRIVE / NATURAL GAS OR LP FIRED

460V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • ADJUSTABLE TIME DELAY SHUTDOWN

Units meet CSA standards but are not CSA certified.*



64HD-3-460

MOTOR	Baldor
VOLTAGE	460V
HP / PHASE / AMPS / RPM	5 / 3 / 8 / 1,750
PSI / GPM	2,000 / 4.0
PUMP	Triplex General TSS1511
PUMP CLASS	P8
BURNER	Electronic Ignitor/Natural Gas or LP Burner System
MAX TEMP.	93°C / 200°F
BTU OUTPUT	385,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel
ADJUSTABLE THERMOSTAT	Yes
TIME DELAY SHUTDOWN	Yes
HOUR METER	Yes
FLOW SWITCH	Yes
PRESSURE RELIEF VALVE	Yes
ROTARY CAM / ROCKER BURNER SWITCH	Yes
CORD / PLUG TYPE	10' / No Plug
UNLOADER	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	700 lbs • 60" x 40" x 67"



AVAILABLE OPTIONS:

- Remote Station with Start/Stop/Restart, Burner On/Off, and Detergent On/Off functions. Standard 10' lead wire is included, and longer lengths can be installed at an additional cost.
- Draft diverter.
- Oil fired burner upgrade.

IN THE BOX



Electric Start



CHOOSE:

- NG or LP Fired
- Left or Right Side Coil

1 147' COIL WITH STAINLESS STEEL WRAP

2 PAC INLINE ADJUSTABLE THERMOSTAT

3 3 POSITION CAM SWITCH WITH OFF/PUMP/BURNER

4 POWDER COATED STEEL FRAME

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 ELECTRONIC IGNITOR WITH NATURAL GAS OR LP BURNER SYSTEM

Scan for full specs and product comparisons



HOT WATER

ELECTRIC BELT DRIVE / NATURAL GAS OR LP FIRED

208V-230V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • ADJUSTABLE TIME DELAY SHUTDOWN

Units meet CSA standards but are not CSA certified.*



	643HD	643HD-3
MOTOR	Baldor	Baldor
VOLTAGE	208V-230V (To be specified)	208V-230V (To be specified)
HP / PHASE / AMPS / RPM	7.5 / 1 / 37-36 / 1,750	7.5 / 3 / 26-25 / 1,750
PSI / GPM	3,000 / 4.0	3,000 / 4.0
PUMP	Triplex General TSS1511	Triplex General TSS1511
PUMP CLASS	P8	P8
BURNER	Electronic Ignitor/Natural Gas or LP Burner System	Electronic Ignitor/Natural Gas or LP Burner System
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	385,000	385,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel	147' x 1/2" Sch. 80 Cold Rolled Steel
ADJUSTABLE THERMOSTAT	Yes	Yes
TIME DELAY SHUTDOWN	Yes	Yes
HOUR METER	Yes	Yes
FLOW / PRESSURE SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
ROTARY CAM BURNER SWITCH	Yes	Yes
CORD / PLUG TYPE	10' / No Plug	10' / No Plug
UNLOADER	External	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	700 lbs • 60" x 40" x 67"	700 lbs • 60" x 40" x 67"



AVAILABLE OPTIONS:

- Remote Station with Start/Stop/Restart, Burner On/Off, and Detergent On/Off functions. Standard 10' lead wire is included, and longer lengths can be installed at an additional cost.
- Draft diverter.
- Oil fired burner upgrade.

IN THE BOX

50' x 3/8" QC DOUBLE BRAIDED STEEL WIRE HOSE

48" QC INSULATED GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start

- 1 147' COIL WITH STAINLESS STEEL WRAP
- 2 PAC INLINE ADJUSTABLE THERMOSTAT
- 3 3 POSITION CAM SWITCH WITH OFF/PUMP/BURNER
- 4 POWDER COATED STEEL FRAME
- 5 TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 6 ELECTRONIC IGNITOR WITH NATURAL GAS OR LP BURNER SYSTEM

INDUSTRIAL SERIES

Scan for full specs and product comparisons



HOT WATER

ELECTRIC BELT DRIVE / NATURAL GAS OR LP FIRED

460V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • ADJUSTABLE TIME DELAY SHUTDOWN

Units meet CSA standards but are not CSA certified.*



643HD-3-460


MOTOR	Baldor
VOLTAGE	460V
HP / PHASE / AMPS / RPM	7.5 / 3 / 16 / 1,750
PSI / GPM	3,000 / 4.0
PUMP	Triplex General TSS1511
PUMP CLASS	P8
BURNER	Electronic Ignitor/Natural Gas or LP Burner System
MAX TEMP.	93°C / 200°F
BTU OUTPUT	385,000
COIL	147' x 1/2" Sch. 80 Cold Rolled Steel
ADJUSTABLE THERMOSTAT	Yes
TIME DELAY SHUTDOWN	Yes
HOUR METER	Yes
FLOW SWITCH	Yes
PRESSURE RELIEF VALVE	Yes
ROTARY CAM / ROCKER BURNER SWITCH	Yes
CORD / PLUG TYPE	10' / No Plug
UNLOADER	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	700 lbs • 60" x 40" x 67"



AVAILABLE OPTIONS:

- Remote Station with Start/Stop/Restart, Burner On/Off, and Detergent On/Off functions. Standard 10' lead wire is included, and longer lengths can be installed at an additional cost.
- Draft diverter.
- Oil fired burner upgrade.

IN THE BOX



Electric Start

*Any required certification is the responsibility of the purchaser/installer.
BE Power Equipment accepts no liability for certification or related costs.



CHOOSE:

- NG or LP Fired
- Left or Right Side Coil

1 147' COIL WITH STAINLESS STEEL WRAP

2 PAC INLINE ADJUSTABLE THERMOSTAT

3 3 POSITION CAM SWITCH WITH OFF/PUMP/BURNER

4 POWDER COATED STEEL FRAME

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 ELECTRONIC IGNITOR WITH NATURAL GAS OR LP BURNER SYSTEM

Scan for full specs and
product comparisons

HOT WATER

ELECTRIC BELT DRIVE / NATURAL GAS OR LP FIRED

208V-230V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • ADJUSTABLE TIME DELAY SHUTDOWN

Units meet CSA standards but
are not CSA certified.*



	67HD	67HD-3
MOTOR	Baldor	Baldor
VOLTAGE	208V-230V (To be specified)	208V-230V (To be specified)
HP / PHASE / AMPS / RPM	10 / 1 / 47-46 / 1,750	10 / 3 / 35-34 / 1,750
PSI / GPM	3,000 / 5.0	3,000 / 5.0
PUMP	Triplex General TS2021	Triplex General TS2021
PUMP CLASS	P8	P8
BURNER	Electronic Ignitor/Natural Gas or LP Burner System	Electronic Ignitor/Natural Gas or LP Burner System
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	440,000	440,000
COIL	230' x 1/2" Sch. 80 Cold Rolled Steel	230' x 1/2" Sch. 80 Cold Rolled Steel
ADJUSTABLE THERMOSTAT	Yes	Yes
TIME DELAY SHUTDOWN	Yes	Yes
HOUR METER	Yes	Yes
FLOW SWITCH	Yes	Yes
PRESSURE RELIEF VALVE	Yes	Yes
ROTARY CAM BURNER SWITCH	Yes	Yes
CORD / PLUG TYPE	10' / No Plug	10' / No Plug
UNLOADER	External	External
ADJUSTABLE HIGH PRESSURE CHEMICAL METERING VALVE	Yes	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	835 lbs • 60" x 40" x 67"	835 lbs • 60" x 40" x 67"



CHOOSE:

- NG or LP Fired
- Left or Right Side Coil
- 208V or 230V

AVAILABLE OPTIONS:

- Remote Station with Start/Stop/Restart, Burner On/Off, and Detergent On/Off functions. Standard 10' lead wire is included, and longer lengths can be installed at an additional cost.
- Draft diverter.
- Oil fired burner upgrade.

IN THE BOX

50' x 3/8" QC DOUBLE BRAIDED STEEL WIRE HOSE

48" QC INSULATED GUN/WAND ASSEMBLY

15° & 25° QC NOZZLES

Electric Start

- 1 230' COIL WITH STAINLESS STEEL WRAP
- 2 PAC INLINE ADJUSTABLE THERMOSTAT
- 3 3 POSITION CAM SWITCH WITH OFF/PUMP/BURNER
- 4 POWDER COATED STEEL FRAME
- 5 TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 6 ELECTRONIC IGNITOR WITH NATURAL GAS OR LP BURNER SYSTEM

INDUSTRIAL SERIES

Scan for full specs and product comparisons



HOT WATER

ELECTRIC BELT DRIVE / NATURAL GAS OR LP FIRED

460V • TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • ADJUSTABLE TIME DELAY SHUTDOWN

Units meet CSA standards but are not CSA certified.*



67HD-3-460


MOTOR	Baldor
VOLTAGE	460V
HP / PHASE / AMPS / RPM	10 / 3 / 15 / 1,750
PSI / GPM	3,000 / 5.0
PUMP	Triplex General TS2021
PUMP CLASS	P8
BURNER	Electronic Ignitor/Natural Gas or LP Burner System
MAX TEMP.	93°C / 200°F
BTU OUTPUT	440,000
COIL	230' x 1/2" Sch. 80 Cold Rolled Steel
ADJUSTABLE THERMOSTAT	Yes
TIME DELAY SHUTDOWN	Yes
HOUR METER	Yes
FLOW SWITCH	Yes
PRESSURE RELIEF VALVE	Yes
ROTARY CAM BURNER SWITCH	Yes
CORD / PLUG TYPE	10' / No Plug
UNLOADER	External
ADJUSTABLE INJECTOR	Yes
WARRANTY	Motor: 2 Yrs • Pump: 5 Yrs • Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	835 lbs • 60" x 40" x 67"



AVAILABLE OPTIONS:

- Remote Station with Start/Stop/Restart, Burner On/Off, and Detergent On/Off functions. Standard 10' lead wire is included, and longer lengths can be installed at an additional cost.
- Draft diverter.
- Oil fired burner upgrade.

IN THE BOX



50' x 3/8" QC
DOUBLE BRAIDED
STEEL WIRE HOSE



48" QC INSULATED
GUN/WAND ASSEMBLY



15° & 25° QC NOZZLES

Electric Start



CHOOSE:

- NG or LP Fired
- Left or Right Side Coil

1 230' COIL WITH STAINLESS STEEL WRAP

2 PAC INLINE ADJUSTABLE THERMOSTAT

3 3 POSITION CAM SWITCH WITH OFF/PUMP/BURNER

4 POWDER COATED STEEL FRAME

5 TRIPLEX PUMP WITH EXTERNAL UNLOADER

6 ELECTRONIC IGNITOR WITH NATURAL GAS OR LP BURNER SYSTEM

HOT BOX

DIESEL FIRED

Scan for full specs and
product comparisons



TMR / TRUCK MOUNT READY

CONVERTS COLD WATER PRESSURE WASHER TO HOT WATER

Units meet CSA standards but
are not CSA certified.*



	96115V	96012V
GPM	4.0-5.0	4.0-5.0
VOLTAGE	115VAC	12VDC
AMPS	15	N/A
BURNER	SM Burner with Electronic Ignitor	SDC Burner with Electronic Ignitor
BATTERY	N/A	Group 24 Deep Cycle Battery Not Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	550,000	550,000
COIL	147" x 1/2" Sch. 80 Cold Rolled Steel	147" x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	26.5 L / 7 Gal Black Poly	26.5 L / 7 Gal Black Poly
ADJUSTABLE THERMOSTAT	No	Yes
HIGH LIMIT SWITCH	Yes	No
FLOW SWITCH	Yes	Yes
RUPTURE DISK	Yes	Yes
TOGGLE BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
CORD / PLUG TYPE	35' / GFCI	No Cord / No Plug
WARRANTY	Burner: 3 Yrs • Coil: Lifetime	Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	365 lbs • 48" x 40" x 62"	368 lbs • 48" x 40" x 62"



1 147' COIL WITH STAINLESS STEEL WRAP

2 PAC INLINE THERMOSTAT (96012V)

3 POLY DIESEL FUEL TANK

4 POWDER COATED STEEL FRAME

5 3/8" QC COUPLER INLET
3/8" QC PLUG OUTLET

6 115VAC BURNER WITH ELECTRONIC IGNITOR
(96115V)

7 12VDC BURNER WITH ELECTRONIC IGNITOR
(96012V)

7 BUILT-IN MOUNTING TABS FOR EASY
BOLT-DOWN INSTALLATION ON VEHICLES

REQUIREMENTS:

- Connect a cold water pressure washer to convert to a hot water system
- 12V burner systems require a minimum 18A charging system on washer.

*Any required certification is the responsibility of the purchaser/installer.
BE Power Equipment accepts no liability for certification or related costs.

COMMERCIAL SERIES

HOT BOX

DIESEL FIRED

CONVERTS COLD WATER PRESSURE WASHER TO HOT WATER

Units meet CSA standards but are not CSA certified.*



	99115V	99012V
GPM	8.0-10.0	8.0-10.0
VOLTAGE	115VAC	12VDC
AMPS	15	N/A
BURNER	SM Burner with Electronic Ignitor	SDC Burner with Electronic Ignitor
BATTERY	N/A	Group 24 Deep Cycle Battery Not Included
MAX TEMP.	93°C / 200°F	93°C / 200°F
BTU OUTPUT	420,000	420,000
COIL	260' x 1/2" Sch. 80 Cold Rolled Steel	260' x 1/2" Sch. 80 Cold Rolled Steel
BURNER FUEL TANK	26.5 L / 7 Gal Black Poly	26.5 L / 7 Gal Black Poly
ADJUSTABLE THERMOSTAT	No	Yes
HIGH LIMIT SWITCH	Yes	No
FLOW SWITCH	Yes	Yes
RUPTURE DISK	Yes	Yes
TOGGLE BURNER SWITCH	Yes	Yes
INLINE FUEL FILTER	Yes	Yes
CORD / PLUG TYPE	35' / GFCI	No Cord / No Plug
WARRANTY	Burner: 3 Yrs • Coil: Lifetime	Burner: 3 Yrs • Coil: Lifetime
SHIPPING (WHT & LxWxH)	545 lbs • 48" x 40" x 62"	545 lbs • 48" x 40" x 62"

Scan for full specs and product comparisons



TMR / TRUCK MOUNT READY



- 1** 260' COIL WITH STAINLESS STEEL WRAP
- 2** PAC INLINE ADJUSTABLE THERMOSTAT
- 3** POLY DIESEL FUEL TANK
- 4** POWDER COATED STEEL FRAME
- 5** 3/8" QC COUPLER INLET
3/8" QC PLUG OUTLET
- 6** 115VAC BURNER WITH ELECTRONIC IGNITOR
(99115V)
12VDC BURNER WITH ELECTRONIC IGNITOR
(99012V)
- 7** BUILT-IN MOUNTING TABS FOR EASY
BOLT-DOWN INSTALLATION ON VEHICLES

REQUIREMENTS:

- Connect a cold water pressure washer to convert to a hot water system
- 12V burner systems require a minimum 18A charging system on washer.

TMR


TRUCK
MOUNT
READY

ALL TMR UNITS ARE DESIGNED FOR FAST,
SECURE MOUNTING ON A TRUCK OR TRAILER.



WHEELED UNITS
START HERE

1

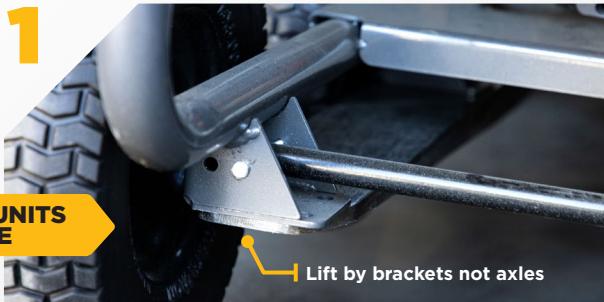

Lift by brackets not axles

1. LIFT & SUPPORT

- Lift the machine using a crane or forklift.
- Use the mounting brackets and do not lift by the axles.

2



2. REMOVE WHEELS

- Unbolt and remove the wheels.


3



3. REMOVE AXLES

- Locate axle bolts and slide out the axles.

4

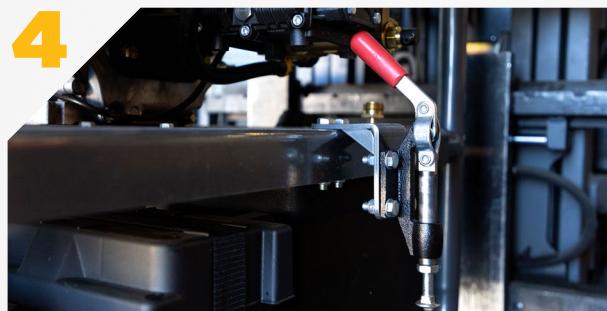

4. REMOVE BRAKES (OPTIONAL)

- If installed, unbolt and remove wheel brake(s).



SKID UNITS
START HERE

5



5. POSITION ON VEHICLE

- Set the machine onto the truck or trailer.
- Choose a location that balances the machine's weight.


6



6. MARK MOUNTING POINTS

- Position the brackets and mark drill holes.
- Bracket design may vary by unit.

7

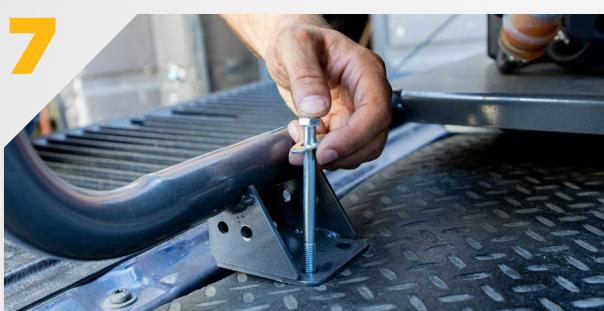

7. DRILL & BOLT

- Drill holes through the platform and bolt the machine securely into place.

8



8. READY TO USE

- Your machine is now mounted and ready for work.

SOFT WASH PRESSURE WASHERS



POWERED by
HONDA™

#THEPOWERYOU NEED

SOFT WASH

MOBILE SOFT WASH SYSTEM

Scan for full specs and
product comparisons




TMR / TRUCK MOUNT READY

GEAR DRIVE SYSTEM • HIGH FLOW DIAPHRAGM PUMP • VIBRATION-ABSORBING FEET • TRUCK MOUNT READY



SW1165HC2

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / GPM	300 / 11.0
PUMP TYPE	Diaphragm
PUMP	Comet Diaphragm P40/20
SEALS	Viton
RPM	550 (Lowered from 3,500)
INLET	1"
OUTLET	3/4"
BYPASS	1/2"
REGULATOR	Built-In
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	90 lbs • 32" x 23" x 22"

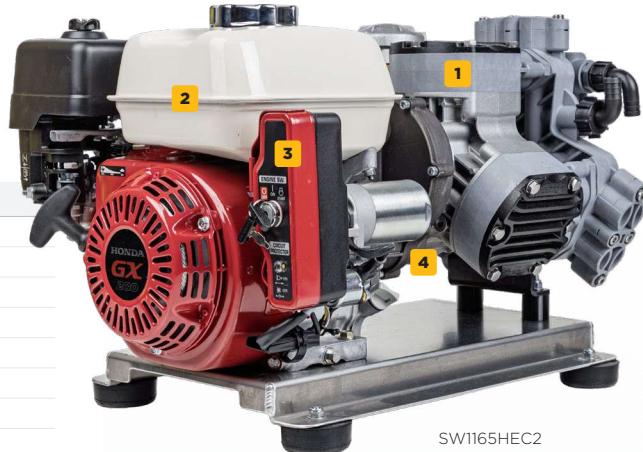


SW1165HEC2



SW1165HEC2

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil & Electric
PSI / GPM	300 / 11.0
PUMP TYPE	Diaphragm
PUMP	Comet Diaphragm P40/20
SEALS	Viton
RPM	550 (Lowered from 3,500)
INLET	1"
OUTLET	3/4"
BYPASS	1/2"
REGULATOR	Built-In
WARRANTY	Engine: 3 Yrs • Pump: 5 Yrs
SHIPPING (WHT & LxWxH)	90 lbs • 32" x 23" x 22"

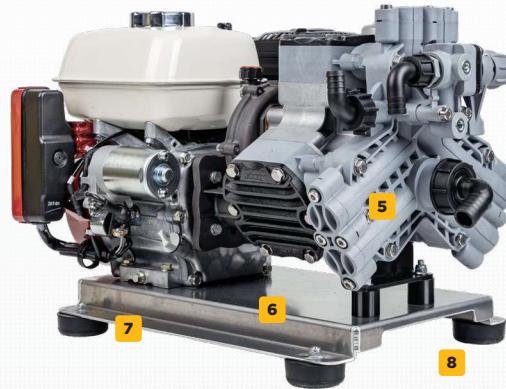

- 1** CHEMICAL RESISTANT DIAPHRAGM PUMP
- 2** 3.1 L (0.9 GAL) GAS TANK
- 3** ELECTRIC START (SW1165HEC2)
- 4** GEAR DRIVE SYSTEM REDUCES THE ENGINE TO 550 RPM FOR THE PUMP
- 5** SINGLE PIECE MANIFOLD
- 6** ALUMINUM FRAME
- 7** EASY BOLT-DOWN INSTALLATION ON VEHICLES
- 8** ANTI-VIBRATION RUBBER FEET

IN THE BOX

Free Engine Oil, Funnel & Spark Plug Wrench

Electric Start



LOOKING FOR PARTS? BARENS DELIVERS FAST.



Barens stocks thousands of pressure washer parts across every major brand, model, and category. From specialized parts to everyday essentials, everything you need is in stock and ready to ship fast.

- Parts for every pressure washer
- Massive in-stock inventory
- Fast and reliable shipping
- Expert customer support



CALL: 1-800-676-0607
EMAIL: ORDERS@BARENS.COM
BROWSE: BARENS.COM

bepowerequipment.com

SAVE TIME. ORDER ONLINE.

**USE YOUR ONLINE DEALER ACCOUNT
TO STREAMLINE ORDERING AND
ACCESS EVERYTHING IN ONE PLACE.**

The BE website is designed to make your job easier.


With your online dealer account, you can:

- ✓ **Order faster** with instant access to your dealer pricing on every product
- ✓ **Save time** with a simple and streamlined online ordering experience
- ✓ **Stay up to date** with our complete catalog of products, accessories and replacement parts



**ACCESS
YOUR ONLINE
DEALER
ACCOUNT**

Click 'Dealer Login' on
the website
Or call your sales rep
to get set up

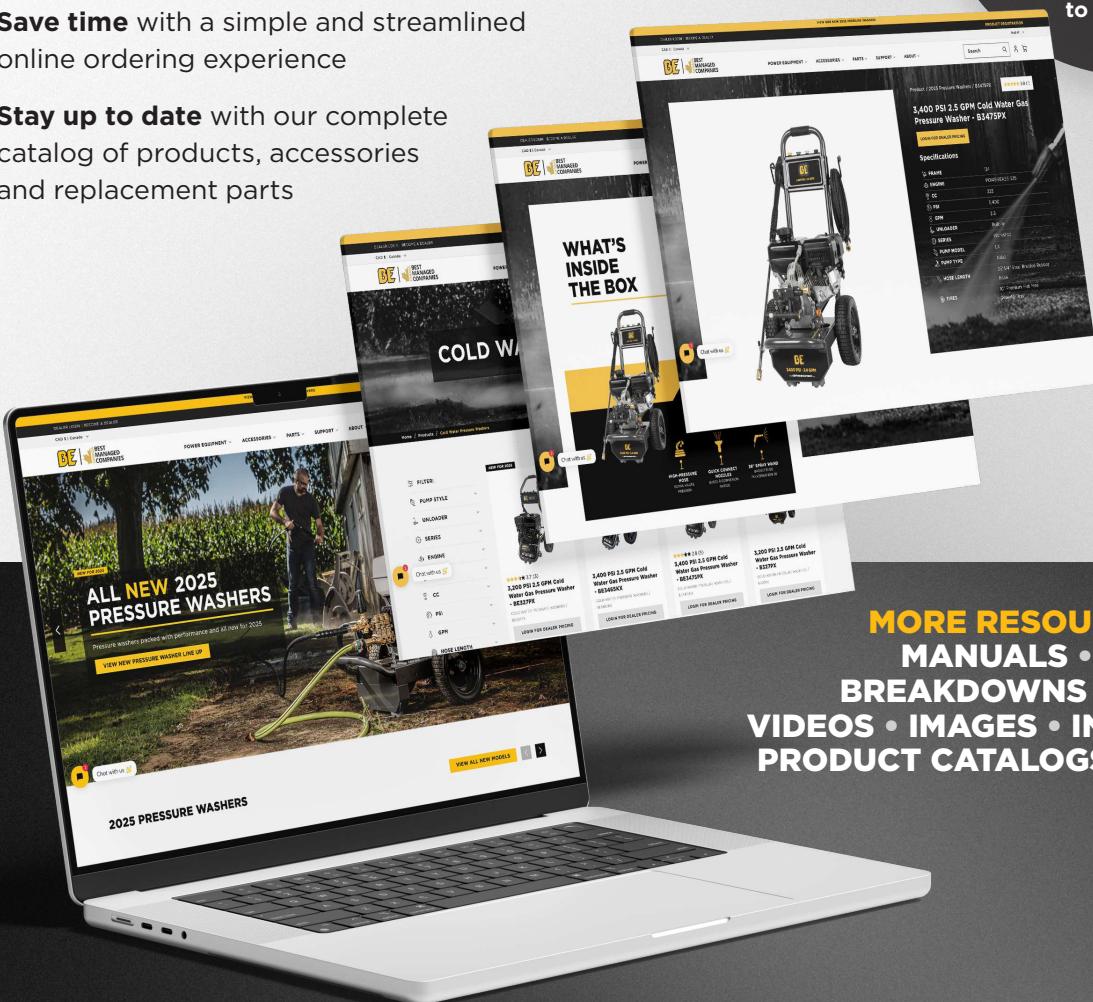

MORE RESOURCES ONLINE:
MANUALS • SPEC SHEETS
BREAKDOWNS • TECH TALKS
VIDEOS • IMAGES • INFOGRAPHICS
PRODUCT CATALOGS • AND MORE



EUROPEAN PROGRAM

All the units in the European Program are CE Approved. They meet European Union standards for safety, health, and environmental protection. Canada Direct products are built and shipped from Canada, while China Direct products are built and shipped from China.



CE

#THEPOWERYOU NEED

WORKSHOP

SERIES

122

RETAIL FRAME

AXIAL PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • INTEGRATED SOAP TANK

**CHINA
DIRECT**



CE327PX

ENGINE	PowerEase 212 / 212CC
START TYPE	Recoil
PSI / BAR	3,200 PSI / 221 BAR
GPM / L/MIN	2.5 GPM / 9.50 L/MIN
PUMP TYPE	Axial
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING (WHT & LxWxH)	80 lbs 24" x 20" x 21"

IN THE BOX

35' x QC THERMOPLASTIC HOSE

36" QC GUN/ WAND ASSEMBLY

Free Engine Oil, Funnel & Spark Plug Wrench

15°, 25°, 40° & SOAKER QC NOZZLES

CE



- 1** RUBBER GRIP
- 2** QUICK CONNECT NOZZLE GROMMETS
- 3** HOSE/WAND HOLDER
- 4** REPOSITION HANDLE FOR EASY STORAGE
- 5** POWDER COATED STEEL FRAME
- 6** 3.6 L (0.95 GAL) GAS TANK
- 7** AXIAL PUMP WITH BUILT-IN UNLOADER
- 8** 11" STANDARD WHEELS
- 9** INTEGRATED SOAP TANK

COMMERCIAL SERIES

124

DEALER FRAME

TRIPLEX PUMP • BUILT-IN UNLOADER • QUICK CONNECT FITTINGS • 10" PREMIUM WHEELS

CANADA
DIRECT

CE3865HA

ENGINE	Honda GX200 / 196CC
START TYPE	Recoil
PSI / BAR	3,800 PSI / 262 BAR
GPM / L/MIN	2.5 GPM / 9.50 L/MIN
PUMP TYPE	Triplex
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	110 lbs 25" x 23" x 24"



CE3865HA

IN THE BOX

 50' 3/8" QC
STEEL BRAIDED
RUBBER HOSE

 36" QC INSULATED
GUN/WAND ASSEMBLY

 15°, 25°, 40° & SOAPER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

- 1 RUBBER GRIP
- 2 QUICK CONNECT NOZZLE GROMMETS
- 3 HOSE/WAND HOLDER
- 4 POWDER COATED STEEL FRAME
- 5 3.1 L (0.9 GAL) GAS TANK
- 6 TRIPLEX PUMP WITH BUILT-IN UNLOADER
- 7 10" PREMIUM FLAT FREE WHEELS/TIRES
- 8 STABILIZING RUBBER FEET

COMMERCIAL SERIES

125

DEALER FRAME

TRIPLEX PUMP • UNLOADER OPTIONS • QUICK CONNECT FITTINGS • 12" PREMIUM WHEELS

CHINA
DIRECT

CE4415PA

ENGINE	Powerease 420 / 420CC
START TYPE	Recoil
PSI / BAR	4,400 PSI / 303 BAR
GPM / L/MIN	4.2 GPM / 15.90 L/MIN
PUMP TYPE	Triplex
UNLOADER	Built-In
INJECTOR	Fixed
WARRANTY	3 Yrs / 5 Yrs Reg
SHIPPING	153 lbs 32" x 25" x 27"
(WHT & LxWxH)	

CANADA
DIRECT

CE4213HAS

CE4213HEAS

CE4213HGS

ENGINE	Honda GX390 / 389CC	Honda GX390 / 389CC	Honda GX390 / 389CC
START TYPE	Recoil	Recoil & Electric	Recoil
PSI / BAR	4,200 PSI / 290 BAR	4,200 PSI / 290 BAR	4,200 PSI / 290 BAR
GPM / L/MIN	4.2 GPM / 15.90 L/MIN	4.2 GPM / 15.90 L/MIN	4.2 GPM / 15.90 L/MIN
PUMP TYPE	Triplex	Triplex	Triplex
UNLOADER	External	External	External
INJECTOR	Adjustable	Adjustable	Adjustable
WARRANTY	3 Yrs	3 Yrs	3 Yrs
SHIPPING	152 lbs 32" x 25" x 27"	158 lbs 32" x 25" x 27"	152 lbs 32" x 25" x 27"
(WHT & LxWxH)			



IN THE BOX

50' 3/8" QC STEEL BRAIDED RUBBER HOSE

36" QC INSULATED GUN/WAND ASSEMBLY

15°, 25°, 40° & SOAKER QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

Electric Start (with battery & bracket)



1 RUBBER GRIP

2 QUICK CONNECT NOZZLE GROMMETS

3 HOSE/WAND HOLDER

4 POWDER COATED STEEL FRAME

5 6.1 L (1.5 GAL) GAS TANK

6 TRIPLEX PUMP

7 12" PREMIUM FLAT FREE WHEELS/TIRES

8 STABILIZING RUBBER FEET

INDUSTRIAL SERIES

088A**ALUMINUM BELT DRIVE DEALER FRAME**

CE

TRIPLEX PUMP • EXTERNAL UNLOADER • QUICK CONNECT FITTINGS • 12" ULTRA PREMIUM WHEELS

CANADA
DIRECT

CE4213HABGS

ENGINE	Honda GX390 / 389CC
START TYPE	Recoil
PSI / BAR	4,200 PSI / 290 BAR
GPM / L/MIN	4.2 GPM / 15.90 L/MIN
PUMP TYPE	Triplex
UNLOADER	External
INJECTOR	Adjustable
WARRANTY	3 Yrs
SHIPPING (WHT & LxWxH)	174 lbs 34" x 28" x 26"



CE4213HABGS



- 1** QUICK CONNECT NOZZLE GROMMETS
- 2** HOSE/WAND HOLDER
- 3** 6.1 L (1.5 GAL) GAS TANK
- 4** TRIPLEX PUMP WITH EXTERNAL UNLOADER
- 5** ALUMINUM FRAME
- 6** BELT DRIVEN FOR LONGEVITY WITH LESS WEAR AND TEAR
- 7** 2.5:1 BELT DRIVE RATIO
- 8** 12" ULTRA PREMIUM FLAT FREE WHEELS/TIRES
- 9** STABILIZING RUBBER FEET

IN THE BOX

 50' x 3/8" QC
STEEL BRAIDED
RUBBER HOSE

 36" QC INSULATED
GUN/WAND ASSEMBLY

 15°, 25°, 40° & SOAKER
QC NOZZLES

Free Engine Oil, Funnel & Spark Plug Wrench

ATS READY INVERTERS

FOR AUTOMATIC BACKUP POWER

The BE BE7500iD and BE10500iT inverter generators now feature built-in 2-Wire Auto Start terminals, giving them ATS-Ready capability. That means they can automatically start or stop when connected to an Automatic Transfer Switch (ATS) or other compatible controller, with no manual intervention needed.

WHAT IT DOES

The 2-Wire Auto Start system uses a simple two-wire signal, the same proven technology used in standby generators worldwide. This allows seamless integration with most remote switches, timers, or third-party controllers.

WHY IT'S USEFUL

- Hands-Free Control:** Start or stop your inverter from a remote location or automatically during power loss.
- Automation-Ready:** Works with ATS units, solar controllers, and other automation systems.
- Flexible Setup:** Connect to a manual switch, wall switch, or external controller with simple wiring and no special equipment.

WHY IT MATTERS

- Seamless Backup:** Your inverter starts and stops automatically when paired with an ATS.
- Reliable Integration:** Compatible with most transfer switches and 2-wire controllers.
- Peace of Mind:** Your home or appliances stay powered — even if you're not there.
- Trusted System:** Built on industry-standard 2-wire technology used in generators worldwide.

THE BENEFITS FOR YOU

- With the 2-Wire Auto Start feature, the BE 7,500W and 10,500W inverter generators are ATS-Ready, giving you true automatic backup power when paired with a transfer switch.
- When the grid fails your inverter steps in. When the grid returns it steps out.
- Always on standby. Always ready.**



2-Wire Switch
(Manual ON/OFF)

2-Wire Auto Start Connection



Closed Circuit
Inverter Starts



Open Circuit
Inverter Stops

Inverter
(BE7500iD / BE10500iT)

Home / Appliances

HOW IT WORKS



POWER OUTAGE DETECTED

The controller senses utility loss and closes the 2-wire circuit.



INVERTER STARTS

Your inverter powers up automatically, supplying backup energy.



POWER RESTORED

The controller opens the circuit, shutting down the inverter.



ALL AUTOMATIC

The system runs itself with no manual switching required.



WATCH A VIDEO
ON THE BENEFITS
OF ATS-READY
INVERTERS

INVERTERS & GENERATORS



POWEEASE[®]
ENGINES

#THEPOWERYOU NEED

RELIABLE POWER. SMART DESIGN. BUILT-IN PROTECTION.

Whether you're powering a jobsite, preparing for outages, or heading off-grid, BE generators and inverters deliver dependable performance and advanced safety. This guide helps you understand the key differences, features, and performance ratings.

WHICH TYPE IS RIGHT FOR YOU?

FEATURE	CONVENTIONAL OPEN FRAME GENERATOR	INVERTER GENERATOR
Power Output	Higher overall wattage	Lower output, but cleaner energy
Power Quality	Suitable for tools and appliances	Safe for phones, laptops, and electronics
Portability	Larger and heavier	Lightweight and compact
Noise Level	Louder	Ultra-quiet operation
Fuel Efficiency	Runs at constant RPM	Adjusts engine speed to demand
Maintenance	Standard upkeep	Standard upkeep
Serviceability	Easier to repair	More complex internals
Price	Lower cost per watt	Premium features at higher price



WATCH A VIDEO ON INVERTER VS OPEN FRAME GENERATORS

HOW POWER IS GENERATED

BE generators convert gasoline into electricity using a gas engine and alternator. Inverters take it a step further, converting raw AC power into clean, stable electricity ideal for sensitive devices.

UNDERSTANDING POWER RATINGS

Knowing your wattage requirements helps you select the right model. Here's what to look for:

- **Volts (V):** Pressure of electricity. Usually 120V or 240V.
- **Amps (A):** Flow of electricity. Varies by device.
- **Watts (W):** Total power = Volts x Amps.

All Inverters and generators are rated in watts and most units list two wattage ratings:

- **Max/Starting/Surge Watts:** Temporary burst needed to **start** a device or handle power spikes
- **Running/Continuous Watts:** Power needed to **keep** a device running without interruption

For example, a table saw may need 1800W running, but spike to 4500W when cutting dense material. That extra wattage is called Overload Capacity and BE leads the industry in providing it without tripping the breaker.

COMMON APPLIANCE WATTAGE

APPLIANCE	MAX/STARTING/SURGE WATTS	MAX/RUNNING/CONTINUOUS WATTS
Table Saw	4500	1800
Air Conditioner	2500	800
Sump Pump	2000	500
Air Compressor	3000	1440
Freezer	2500	500
Electric Fan	600	300
Kettle	1600	1600
Laptop	60	60
Toaster	1500	1500
Radio	80	80
Phone Charger	60	60

POWER YOU CAN TRUST WITH PROTECTION BUILT IN

All BE generators and inverters include advanced safety features to keep people and equipment safe in any environment.



CARBON MONOXIDE DETECTION

Built-in sensors continuously monitor CO levels. If dangerous levels are detected, the generator automatically shuts down, keeping you, your crew, or your family safe from harmful fumes.



MAGNETIC DIPSTICK PROTECTION

Captures harmful metal particles in the engine oil, reducing wear and tear on critical components and keeping your generator running longer.



EXTREME COLD WEATHER START

Designed for harsh climates, our cold-start technology ensures reliable ignition in freezing temperatures so you're never left without power when you need it most.



OVERLOAD SHUTDOWN PROTECTION

Automatically shuts down the generator if power demand exceeds safe limits, preventing damage to the engine, alternator, and connected devices.



LOW OIL SHUTDOWN PROTECTION

Protects your engine from damage by automatically shutting down when oil levels drop too low, preventing costly repairs and extending engine life.



ONE-TOUCH BUTTON START

Forget pull cords and lost keys, just push for instant power. If it doesn't start right away, it automatically retries up to three times for a reliable start in any weather.

(Available on electric start units only)

PARALLEL READY FOR MORE POWER WHEN YOU NEED IT

All BE inverter generators are parallel ready, allowing two units to be linked together with a BE Parallel Kit for increased power output.

- Simple way to combine two units for more power
- Plug-and-play connection using BE Parallel Kit
- Ideal for RVs, food trucks, job sites, or backup use

BE2800i, BE4000i AND BE4700iT: 85.561.079 PARALLEL KIT

BE7500iT AND BE10500iT: 85.561.080 PARALLEL KIT

WATCH A VIDEO ON THE
PARALLEL KIT SETUP



COMMERCIAL

SERIES

INVERTERS

SUITCASE STYLE

Scan for full specs and
product comparisons



RRP / RETAIL READY
PRODUCTS

120V • GAS • RECOIL START • PARALLEL READY • BUILT-IN SAFETY FEATURES



BE2800i



BE4000i

ENGINE TYPE	CC	Powerease 145CC	Powerease 145CC
FUEL TYPE	Gas	Gas	Gas
STARTING WATTS / RUNNING WATTS	2,800 / 2,500	4,000 / 3,200	4,000 / 3,200
A/C VOLTAGE	120V	120V	120V
STARTING AMPS @ 120V	38A	52A	52A
RUNNING AMPS @ 120V	20A	27A	27A
DECIBEL RATING	64.2dB	63.9dB	63.9dB
ENGINE START	Recoil	Recoil	Recoil
ONE TOUCH START	No	No	No
ECO MODE	Auto-Idle	Auto-Idle	Auto-Idle
ATS-READY	No	No	No
OVERLOAD PROTECTION	Yes	Yes	Yes
LOW OIL SHUT DOWN	Yes	Yes	Yes
CO SHUT DOWN	Yes	Yes	Yes
FLOOD LIGHT	Yes	Yes	Yes
COLD WEATHER START	Yes	Yes	Yes
FUEL TANK CAP.	3.6 L / 1 Gal	3.6 L / 1 Gal	3.6 L / 1 Gal
RATED CONSUMPTION AT MAX OUTPUT	1.8 L/hr (0.5 Gal/hr)	1.8 L/hr (0.5 Gal/hr)	1.8 L/hr (0.5 Gal/hr)
CHOKE TYPE	Manual	Manual	Manual
NEMA 5-20R	(1)	2	2
NEMA L5-30R	(2)	0	0
NEMA L14-30R	(3)	0	0
NEMA 14-50R	(4)	0	0
USB PORTS (A/C)	(5)	0	0
12V @ 8.3 A/DC (BCX12H)	(6)	1	1
PARALLEL KIT	85.561.079	85.561.079	85.561.079
BATTERY INCLUDED	N/A	N/A	N/A
WARRANTY	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)	56 lbs • 23" x 15" x 19"	59 lbs • 23" x 15" x 19"	59 lbs • 23" x 15" x 19"

RRP ECOM

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel, 12V to USB A & C Adapter

RRP Retail Ready Packaging **ECOM** Ecom Ready Product



BE4000i



1 COMFORTABLE CARRY HANDLE

2 SOUND DAMPENING SHELL

3 LED FLOODLIGHT

4 OVERLOAD AND LOW OIL SHUTDOWN PROTECTION

5 AUTOMATIC CARBON MONOXIDE DETECTOR

6 EASY ACCESS OUTLETS

7 PARALLEL READY (PART# 85.561.079)

8 STABILIZING RUBBER FEET

COMMERCIAL SERIES

INVERTERS

SUITCASE STYLE

Scan for full specs and product comparisons



RRP / RETAIL READY PRODUCTS

120V • DUAL FUEL • RECOIL & ELECTRIC START • ONE TOUCH START • PARALLEL READY • BUILT-IN SAFETY FEATURES

DUAL FUEL
GAS & PROPANE

BE4700iD

ENGINE TYPE	CC	Powerease 160CC
FUEL TYPE		Gas / Propane
STARTING WATTS / RUNNING WATTS		Gas: 4,700/3,800 • LPG: 4,000/3,500
A/C VOLTAGE		120V
STARTING AMPS @ 120V		61A
RUNNING AMPS @ 120V		32A
DECIBEL RATING		64.3dB
ENGINE START		Recoil & Electric
ONE TOUCH START		Yes
ECO MODE		Auto-Idle
ATS-READY		No
OVERLOAD PROTECTION		Yes
LOW OIL SHUT DOWN		Yes
CO SHUT DOWN		Yes
FLOOD LIGHT		Yes
COLD WEATHER START		Yes
FUEL TANK CAP.		6 L / 1.5 Gal
RATED CONSUMPTION AT MAX OUTPUT		Gas: 2.4 L/hr (0.6 Gal/hr) • LPG: 1.18kg/H (2.60Lbs/h)
CHOKE TYPE		Automatic
NEMA 5-20R	⊕	2
NEMA L5-30R	⊖	1
NEMA L14-30R	⊖	0
NEMA 14-50R	⊕	0
USB PORTS (A/C)	⊖	0
12V @ 8.3 A/DC (BCX12H)	⊖	1
PARALLEL KIT		85.561.079
BATTERY INCLUDED		Lithium Ion
WARRANTY		Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)		76 lbs • 25" x 16" x 20"

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel, Lithium-ion Battery, LPG Hose, 12V to USB A & C Adapter, L5-30P to TT-30R Plug Adapter

RRP Retail ready Packaging ECOM Ecom Ready Product



BE4700iD



- 1 COMFORTABLE CARRY HANDLE
- 2 SOUND DAMPENING SHELL
- 3 RETRACTABLE HANDLE
- 4 LED FLOODLIGHT
- 5 OVERLOAD AND LOW OIL SHUTDOWN PROTECTION
- 6 AUTOMATIC CARBON MONOXIDE DETECTOR
- 7 ONE TOUCH START
- 8 EASY ACCESS OUTLETS
- 9 PARALLEL READY (PART# 85.561.079)
- 10 FLAT FREE TIRES FOR EASY TRANSPORT
- 11 FUEL TYPE SELECTION
- 12 STABILIZING RUBBER FEET

INVERTERS

FOLDING HANDLE

Scan for full specs and
product comparisons



RRP / RETAIL READY
PRODUCTS

120V/240V • DUAL FUEL • RECOIL & ELECTRIC START • ONE TOUCH START • PARALLEL READY • BUILT-IN SAFETY FEATURES

DUAL FUEL
GAS & PROPANE



BE7500iD

ENGINE TYPE	CC	Powersease 312CC
FUEL TYPE		Gas / Propane
STARTING WATTS / RUNNING WATTS		Gas: 7,500/6,000 • LPG: 6,000/5,500
A/C VOLTAGE		120V / 240V
STARTING AMPS @ 120V		96A
RUNNING AMPS @ 120V		50A
DECIBEL RATING		66.7dB
ENGINE START		Recoil & Electric
ONE TOUCH START		Yes
ECO MODE		Auto-Idle
ATS-READY		Yes
OVERLOAD PROTECTION		Yes
LOW OIL SHUT DOWN		Yes
CO SHUT DOWN		Yes
FLOOD LIGHT		Yes
COLD WEATHER START		Yes
FUEL TANK CAP.		12.5 L / 3.3 Gal
RATED CONSUMPTION AT MAX OUTPUT		Gas: 3 L/hr (0.9 Gal/hr) • LPG: 1.95kg/H (4.30 Lbs/h)
CHOKE TYPE		Automatic
NEMA 5-20R	①	2
NEMA L5-30R	②	0
NEMA L14-30R	③	1
NEMA 14-50R	④	0
USB PORTS (A/C)	⑤	1/1
12V @ 8.3 A/DC (BCX12H)	⑥	1
PARALLEL KIT		85.561.080
BATTERY INCLUDED		Lithium Ion
WARRANTY		Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)		142 lbs • 30" x 22" x 24"

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel, Lithium-ion Battery, LPG Hose, 1L14-30P to TT-30R Plug Adapter

RRP Retail Ready Packaging **ECOM** Ecom Ready Product



BE7500iD

**NOW
ATS
READY**



1 SOUND DAMPENING SHELL

2 RETRACTABLE HANDLE

3 LED FLOODLIGHT

4 ONE TOUCH START

5 OVERLOAD AND LOW OIL SHUTDOWN
PROTECTION

6 AUTOMATIC CARBON MONOXIDE DETECTOR

7 EASY ACCESS OUTLETS

8 PARALLEL READY (PART# 85.561.080)

9 FLAT FREE TIRES FOR EASY TRANSPORT

10 FUEL TYPE SELECTION

11 STABILIZING RUBBER FEET

COMMERCIAL SERIES

Scan for full specs and product comparisons



INVERTERS

FOLDING HANDLE

RRP / RETAIL READY PRODUCTS

120V/240V • TRI-FUEL • RECOIL & ELECTRIC START • ONE TOUCH START • PARALLEL READY • BUILT-IN SAFETY FEATURES



BE10500iT

ENGINE TYPE	CC	Powerease 458CC
FUEL TYPE		Gas / Propane / Natural Gas
STARTING WATTS / RUNNING WATTS		Gas: 10,500/8,500 • LPG: 9,500/8,000 • NG: 8,400 / 6,800
A/C VOLTAGE		120V / 240V
STARTING AMPS @ 120V		258A
RUNNING AMPS @ 120V		135A
DECIBEL RATING		68.8dB
ENGINE START		Recoil & Electric
ONE TOUCH START		Yes
ECO MODE		Auto-Idle
ATS-READY		Yes
OVERLOAD PROTECTION		Yes
LOW OIL SHUT DOWN		Yes
CO SHUT DOWN		Yes
FLOOD LIGHT		Yes
COLD WEATHER START		Yes
FUEL TANK CAP.		26 L / 6.8 Gal
RATED CONSUMPTION AT MAX OUTPUT		Gas: 5.2 L/hr (1.4 Gal/hr) • LPG: 3.43kg/H (7.56Lbs/h) • NG: 3.27 H/m ³ (115.47CF/H)
CHOKE TYPE		Automatic
NEMA 5-20R	①	2
NEMA L5-30R	②	0
NEMA L14-30R	③	1
NEMA 14-50R	④	1
USB PORTS (A/C)	⑤	0
12V @ 8.3 A/DC (BCX12H)	⑥	1
PARALLEL KIT		85.561.080
BATTERY INCLUDED		Lithium Ion
WARRANTY		Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)		289 lbs • 37" x 25" x 32"

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel, Lithium-ion Battery, Battery Charger, LPG Hose, NG Hose, NG Air Intake Connector, 12V to USB A & C Adapter

RRP Retail Ready Packaging ECOM Ecom Ready Product



BE10500iT

NOW
ATS
READY

- 1 SOUND DAMPENING SHELL
- 2 LED FLOODLIGHT
- 3 HOUR METER
- 4 OVERLOAD AND LOW OIL SHUTDOWN PROTECTION
- 5 ONE TOUCH START
- 6 EASY ACCESS OUTLETS
- 7 FUEL TYPE SELECTION
- 8 PARALLEL READY (PART# 85.561.080)
- 9 AUTOMATIC CARBON MONOXIDE DETECTOR
- 10 FLAT FREE TIRES FOR EASY TRANSPORT
- 11 FOLDING HANDLE
- 12 RUBBER FEET

GENERATORS

RECOIL START

Scan for full specs and
product comparisons



RRP / RETAIL READY
PRODUCTS

120V & 120V/240V OPTIONS • GAS • RECOIL START • PARALLEL READY • BUILT-IN SAFETY FEATURES



BE3800



BE4800



BE4800



	BE3800	BE4800
ENGINE TYPE CC	PowerEASE 212CC	PowerEASE 223CC
FUEL TYPE	Gas	Gas
STARTING WATTS / RUNNING WATTS	3,800 / 3,000	4,800 / 3,600
A/C VOLTAGE	120V	120V / 240V
STARTING AMPS @ 120V	48A	59A
RUNNING AMPS @ 120V	25A	31A
DECIBEL RATING	72.1dB	71.8dB
ENGINE START	Recoil	Recoil
ONE TOUCH START	No	No
ECO MODE	N/A	N/A
OVERLOAD PROTECTION	Yes	Yes
LOW OIL SHUT DOWN	Yes	Yes
CO SHUT DOWN	Yes	Yes
FLOOD LIGHT	Yes	Yes
COLD WEATHER START	Yes	Yes
FUEL TANK CAP.	15 L / 3.9 Gal	15 L / 3.9 Gal
RATED CONSUMPTION AT MAX OUTPUT	1.8 L/hr (0.5 Gal/hr)	2 L/hr (0.5 Gal/hr)
CHOKE TYPE	Manual	Manual
NEMA 5-20R	(1)	2
NEMA L5-30R	(2)	1
NEMA L14-30R	(3)	0
NEMA 14-50R	(4)	0
USB PORTS (A/C)	(5)	0
12V @ 8.3 A/DC (BCX12H)	(6)	0
PARALLEL KIT	N/A	N/A
BATTERY INCLUDED	N/A	N/A
WARRANTY	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)	106 lbs • 24" x 19" x 19"	122 lbs • 27" x 19" x 19"

RRP ECOM

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel

RRP Retail Ready Packaging **ECOM** Ecom Ready Product

1 DURABLE POWDER COATED STEEL ROLL CAGE

2 COLD WEATHER START

3 15L (3.9 GAL) GAS TANK

4 LED FLOODLIGHT

5 AUTOMATIC CARBON MONOXIDE DETECTOR

6 EASY ACCESS OUTLETS

7 OVERLOAD AND LOW OIL SHUTDOWN PROTECTION

8 RUGGED AND RELIABLE POWEREASE ENGINE

9 FOLDING HANDLES

10 STABILIZING RUBBER FEET

11 FLAT FREE TIRES FOR EASY TRANSPORT

COMMERCIAL SERIES

GENERATORS

RECOIL START

Scan for full specs and
product comparisons



RRP / RETAIL READY PRODUCTS

120V/240V • GAS • RECOIL START • PARALLEL READY • BUILT-IN SAFETY FEATURES

**BE7000****BE9000**

ENGINE TYPE CC	Powerease 312CC	Powerease 389CC
FUEL TYPE	Gas	Gas
STARTING WATTS / RUNNING WATTS	7,000 / 5,500	9,000 / 6,300
A/C VOLTAGE	120V / 240V	120V / 240V
STARTING AMPS @ 120V	88A	115A
RUNNING AMPS @ 120V	46A	60A
DECIBEL RATING	72.3dB	70.3dB
ENGINE START	Recoil	Recoil
ONE TOUCH START	No	No
ECO MODE	N/A	Auto-Idle
OVERLOAD PROTECTION	Yes	Yes
LOW OIL SHUT DOWN	Yes	Yes
CO SHUT DOWN	Yes	Yes
FLOOD LIGHT	Yes	Yes
COLD WEATHER START	Yes	Yes
FUEL TANK CAP.	20 L / 5.3 Gal	25 L / 6.6 Gal
RATED CONSUMPTION AT MAX OUTPUT	2.7 L/hr (0.7 Gal/hr)	3.4 L/hr (0.9 Gal/hr)
CHOKE TYPE	Manual	Manual
NEMA 5-20R	(1)	3
NEMA L5-30R	(2)	0
NEMA L14-30R	(3)	1
NEMA 14-50R	(4)	0
USB PORTS (A/C)	(5)	1
12V @ 8.3 A/DC (BCX12H)	(6)	0
PARALLEL KIT	N/A	N/A
BATTERY INCLUDED	N/A	N/A
WARRANTY	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs	Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)	155 lbs • 31" x 21" x 21"	193 lbs • 32" x 21" x 23"

RRP ECOM

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel

RRP Retail Ready Packaging ECOM Ecom Ready Product



BE9000



**1 DURABLE POWDER COATED STEEL
ROLL CAGE**

2 COLD WEATHER START

3 25L (6.6 GAL) GAS TANK

4 LED FLOODLIGHT

5 AUTOMATIC CARBON MONOXIDE DETECTOR

6 EASY ACCESS OUTLETS

**7 OVERLOAD AND LOW OIL SHUTDOWN
PROTECTION**

8 RUGGED AND RELIABLE POWEREASE ENGINE

9 FOLDING HANDLES

10 STABILIZING RUBBER FEET

11 FLAT FREE TIRES FOR EASY TRANSPORT

GENERATORS

ELECTRIC START

Scan for full specs and
product comparisons



RRP / RETAIL READY
PRODUCTS

120V/240V • GAS • RECOIL & ELECTRIC START • ONE TOUCH START • BUILT-IN SAFETY FEATURES



BE11000

ENGINE TYPE	CC	Powerease 420CC
FUEL TYPE		Gas
STARTING WATTS / RUNNING WATTS		11,000 / 7,200
A/C VOLTAGE		120V / 240V
STARTING AMPS @ 120V		115A
RUNNING AMPS @ 120V		60A
DECIBEL RATING		73.2dB
ENGINE START		Recoil & Electric
ONE TOUCH START		Yes
ECO MODE		Auto-Idle
OVERLOAD PROTECTION		Yes
LOW OIL SHUT DOWN		Yes
CO SHUT DOWN		Yes
FLOOD LIGHT		Yes
COLD WEATHER START		Yes
FUEL TANK CAP.		25 L / 6.6 Gal
RATED CONSUMPTION AT MAX OUTPUT		3.7 L/hr (1 Gal/hr)
CHOKE TYPE		Automatic
NEMA 5-20R	⊕	3
NEMA L5-30R	⊖	0
NEMA L14-30R	⊖	1
NEMA 14-50R	⊕	0
USB PORTS (A/C)	⊖	1
12V @ 8.3 A/DC (BCX12H)	⊖	0
PARALLEL KIT		N/A
BATTERY INCLUDED		Lithium Ion
WARRANTY		Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)		203 lbs • 32" x 22" x 23"

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel, Lithium-ion Battery

RRP Retail Ready Packaging **ECOM** Ecom Ready Product



BE11000



BE11000 AVR

1 DURABLE POWDER COATED STEEL
ROLL CAGE

2 COLD WEATHER START

3 25L (6.6 GAL) GAS TANK

4 LED FLOODLIGHT

5 ONE TOUCH START

6 EASY ACCESS OUTLETS

7 OVERLOAD AND LOW OIL SHUTDOWN
PROTECTION

8 AUTOMATIC CARBON MONOXIDE DETECTOR

9 RUGGED AND RELIABLE POWEREASE ENGINE

10 FOLDING HANDLES

11 STABILIZING RUBBER FEET

12 FLAT FREE TIRES FOR EASY TRANSPORT

COMMERCIAL SERIES

GENERATORS

ELECTRIC START

120V/240V • GAS & TRI-FUEL OPTIONS • RECOIL & ELECTRIC START • BUILT-IN SAFETY FEATURES



BE12500T

ENGINE TYPE	CC	Powerease 458CC
FUEL TYPE		Gas / Propane / Natural Gas
STARTING WATTS / RUNNING WATTS		Gas: 12,500 9,000 • 11,000/8,000 • NG: 9,000/7,200
A/C VOLTAGE		120V / 240V
STARTING AMPS @ 120V		143A
RUNNING AMPS @ 120V		75A
DECIBEL RATING		74.6dB
ENGINE START		Recoil & Electric
ONE TOUCH START		Yes
ECO MODE		Auto-Idle
OVERLOAD PROTECTION		Yes
LOW OIL SHUT DOWN		Yes
CO SHUT DOWN		Yes
FLOOD LIGHT		Yes
COLD WEATHER START		Yes
FUEL TANK CAP.		25 L / 6.6 Gal
RATED CONSUMPTION AT MAX OUTPUT		Gas: 5.2 L/hr (1.4 Gal/hr) • LPG: 3.43kg/H (7.56Lbs/h) • NG: 3.27 H/m ³ (15.47CF/H)
CHOKE TYPE		Automatic
NEMA 5-20R	⑪	2
NEMA L5-30R	⑫	0
NEMA L14-30R	⑬	1
NEMA 14-50R	⑭	1
USB PORTS (A/C)	⑮	1
12V @ 8.3 A/DC (BCX12H)	⑯	0
PARALLEL KIT		N/A
BATTERY INCLUDED		Lithium Ion
WARRANTY		Engine: 2 Yrs / 5 Yrs Reg • Electronics: 5 Yrs
SHIPPING (WHT & LxWxH)		233 lbs • 32" x 22" x 23"

RRP ECOM

IN THE BOX

Dual Purpose Screwdriver, Engine Oil, Funnel, Lithium-ion Battery, LPG Hose, NG Hose, NG Air Intake Connector

RRP Retail Ready Packaging ECOM Ecom Ready Product

Scan for full specs and product comparisons



BE12500T



- 1 DURABLE POWDER COATED STEEL ROLL CAGE
- 2 COLD WEATHER START
- 3 25L (6.6 GAL) GAS TANK
- 4 FUEL TYPE SELECTION
- 5 LED FLOODLIGHT
- 6 ONE TOUCH START
- 7 EASY ACCESS OUTLETS
- 8 OVERLOAD AND LOW OIL SHUTDOWN PROTECTION
- 9 AUTOMATIC CARBON MONOXIDE DETECTOR
- 10 RUGGED AND RELIABLE POWEREASE ENGINE
- 11 FOLDING HANDLES
- 12 STABILIZING RUBBER FEET
- 13 FLAT FREE TIRES FOR EASY TRANSPORT



NEED TO PUMP CHEMICALS?

Certain jobs call for more than a standard pump. BE's Chemical Transfer Pumps are built with fiber/polyester housings and impellers, giving you the durability and resistance you need for moving corrosive or abrasive liquids safely.

SEE THE FULL RANGE OF CHEMICAL TRANSFER PUMPS ON PAGE 98

WATER TRANSFER PUMPS



POWEEASE
ENGINES

POWERED by
HONDA™

#THEPOWERYOUNEED

WATER TRANSFER PUMPS

Water is essential for farming, construction, and emergency use. Whether it's clearing floodwater, managing irrigation, or fighting fires, BE water pumps give you the power to control water and move it efficiently. Our pumps are built tough for heavy use and trusted by professionals across North America.

TYPES OF PUMPS



WATER TRANSFER PUMPS

Designed for moving clean water efficiently. Ideal for general use in irrigation, draining, or filling tanks. Clean water use extends pump life.



HIGH PRESSURE PUMPS

Engineered for long-distance water movement. Delivers higher PSI and lower GPM. Works well for spray applications, hilltop delivery, and emergency fire control.



CHEMICAL / POLY PUMPS

Built with fiberglass-reinforced polyester for handling agricultural and industrial liquids. Suitable for fertilizers, mild acids, and corrosive fluids.



SEMI-TRASH PUMPS

Handles water with small debris like sand or silt. Ideal for dirty job sites, ditches, and construction zones. Durable housing and quick-access bolts make cleanouts easy.



FULL TRASH PUMPS

Heavy-duty pumps for tough jobs with large debris or solids up to 1 inch. Used for flood recovery, slurry water, and high-volume site clearing.



FIRE SUPPRESSION PUMPS & KITS

Portable high-pressure pump systems designed for fire prevention and emergency response. Available as complete kits with hoses and nozzles included. Built to be ready when every second counts.

KEY PUMP TERMS



Suction Lift: Vertical distance from the water source up to the pump's inlet.



Discharge Lift: Vertical distance from the pump to the discharge point.



Total Lift: Combined height of suction and discharge lift.



GPM (Gallons per Minute): How much water the pump moves. Higher GPM means more volume.



PSI (Pounds per Square Inch): Water pressure at the outlet. Higher PSI means longer pump distance.

CHOOSING A WATER TRANSFER PUMP

APPLICATION	WATER TRANSFER	HIGH PRESSURE	CHEMICALS	SEMI-TRASH	FULL TRASH	FIRE SUPPRESSION
Clear Water	✓	✓	✓	✓	✓	✓
Grey Water	✓	✓	✓	✓	✓	
Septic Tank Water	✓	✓	✓	✓	✓	
Salt Water		✓	✓	✓	✓	
Slimy Water			✓	✓	✓	
Muck or Mud Water			✓	✓	✓	
Abrasive / Grit-Filled Water				✓	✓	
Ditch or Slow Seepage Water				✓	✓	
Manholes				✓	✓	
Brush or Grass Fires		✓				✓
Liquid Fertilizer or Ag Chemicals			✓			
High Solid Content Water					✓	



KNOW YOUR PUMP

- 1 Fuel Tank:** Always leave room for fuel expansion.
- 2 Priming Plug:** Fill the pump with water here to prime pump before starting.
- 3 Discharge Outlet:** Connect discharge hose here.
- 4 Choke Lever:** Prepares a cold engine for starting.
- 5 Air Cleaner:** Protects engine by filtering dust and debris out of intake air.
- 6 Recoil Starter:** Used for pull starting the engine.
- 7 Engine Speed Lever (Throttle):** Used to adjust engine speed to control pump output.
- 8 On/Off Switch:** Set this switch to "ON" before using recoil starter. Set switch to "OFF" to stop a running engine.
- 9 Oil Fill Port:** Check and add engine oil here.
- 10 Oil Drain Bolt:** Drain engine oil here.
- 11 Suction Inlet:** Connect rigid non-collapsible suction hose here.
- 12 Water Drain Plug:** Remove to drain water from pump and flush internal components with clean water.
- 13 Pump Chamber:** Be sure to fill with water before starting.

WORKSHOP

SERIES

COMMERCIAL

SERIES

Scan for full specs and
product comparisons

WATER TRANSFER PUMPS

ALUMINUM HOUSING • ALUMINUM OR CAST IRON IMPELLER



WORKSHOP

SERIES

WP-1020R



WORKSHOP

SERIES

WP-1015HT



WORKSHOP

SERIES

WP-2070S



COMMERCIAL

SERIES

WP-2065HL


ENGINE TYPE CC	Powerease 79 / 80CC	FUEL TANK CAP.	Honda GX25 / 25CC	ENGINE TYPE CC	Powerease 225 / 223CC	FUEL TANK CAP.	Honda GX200 / 196CC
FUEL TANK CAP.	1.89 L / 0.5 Gal	FUEL TANK CAP.	0.53 L / 0.14 Gal	FUEL TANK CAP.	3.6 L / 0.95 Gal	FUEL TANK CAP.	3.1 L / 0.82 Gal
GPM / PSI	42 / 37	GPM / PSI	36 / 37	GPM / PSI	158 / 33	GPM / PSI	158 / 33
SUCTION / DISCHARGE / TOTAL LIFT	20' / 62' / 85'	SUCTION / DISCHARGE / TOTAL LIFT	26' / 74' / 100'	SUCTION / DISCHARGE / TOTAL LIFT	26' / 59' / 82'	SUCTION / DISCHARGE / TOTAL LIFT	26' / 59' / 82'
PORT SIZE	1" Inlet/Outlet	PORT SIZE	1" Inlet/Outlet	PORT SIZE	2" Inlet/Outlet	PORT SIZE	2" Inlet/Outlet
MAX SOLIDS SIZE	0"	MAX SOLIDS SIZE	0"	MAX SOLIDS SIZE	0"	MAX SOLIDS SIZE	0"
HOUSING	Aluminum	HOUSING	Aluminum	HOUSING	Aluminum	HOUSING	Aluminum
IMPELLER	Aluminum	IMPELLER	Aluminum	IMPELLER	Cast Iron	IMPELLER	Cast Iron
FRAME	No Frame	FRAME	No Frame	FRAME	Powder Coated Steel Roll Cage Frame	FRAME	Powder Coated Steel Roll Cage Frame
TOOLLESS PUMP BODY ACCESS	No	TOOLLESS PUMP BODY ACCESS	No	TOOLLESS PUMP BODY ACCESS	No	TOOLLESS PUMP BODY ACCESS	No
WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	WARRANTY	Engine: 3 Yrs • Pump: 2 Yrs	WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	WARRANTY	Engine: 3 Yrs • Pump: 2 Yrs
SHIPPING (WHT & LxWxH)	34 lbs • 16" x 12" x 16"	SHIPPING (WHT & LxWxH)	32 lbs • 16" x 12" x 16"	SHIPPING (WHT & LxWxH)	60 lbs • 21" x 17" x 19"	SHIPPING (WHT & LxWxH)	62 lbs • 21" x 17" x 19"

ECOM

ECOM

ECOM

- 1 POWDER COATED STEEL FRAME
- 2 1" OUTLET
- 3 1" INLET
- 4 POWEREASE 225 ENGINE
- 5 HEAVY-DUTY CAST IRON IMPELLER
- 6 ALUMINUM HOUSING
- 7 BUILT-IN DATA PLATE

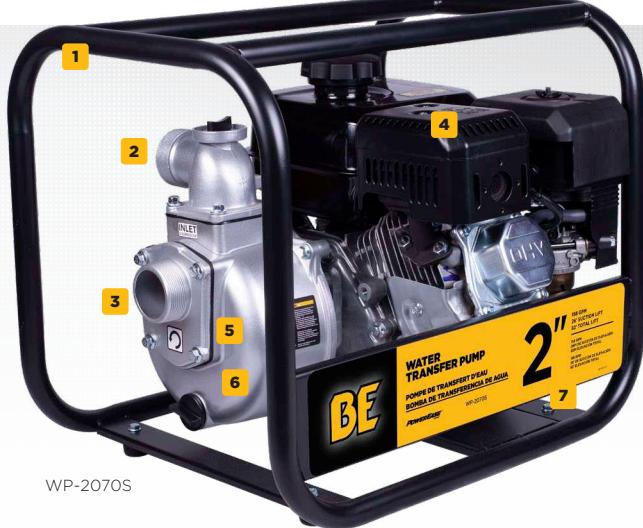

IN THE BOX

Engine Oil, Funnel & Screwdriver

WP-2070S

ECOM Ecom Ready Product



WORKSHOP SERIES COMMERCIAL SERIES

WATER TRANSFER PUMPS

ALUMINUM HOUSING • CAST IRON IMPELLER

Scan for full specs and product comparisons



WORKSHOP SERIES

WP-3070S

ENGINE TYPE CC	Powerease 225 / 223CC	Honda GX200 / 196CC	Honda GX390 / 389CC
FUEL TANK CAP.	3.6 L / 0.95 Gal	3.1 L / 0.82 Gal	6.1 L / 1.6 Gal
GPM / PSI	264 / 35	264 / 35	430 / 38
SUCTION / DISCHARGE / TOTAL LIFT	26' / 62' / 85'	26' / 59' / 85'	26' / 72' / 115'
PORT SIZE	3" Inlet/Outlet	3" Inlet/Outlet	4" Inlet/Outlet
MAX SOLIDS SIZE	0"	0"	0"
HOUSING	Aluminum	Aluminum	Aluminum
IMPELLER	Cast Iron	Cast Iron	Cast Iron
FRAME	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame
TOOLLESS PUMP BODY ACCESS	No	No	No
WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	Engine: 3 Yrs • Pump: 2 Yrs	Engine: 3 Yrs • Pump: 2 Yrs
SHIPPING (WHT & LxWxH)	63 lbs • 21" x 17" x 19"	67 lbs • 21" x 17" x 19"	112 lbs • 26" x 18" x 22"

ECOM

ECOM

- 1 POWDER COATED STEEL FRAME
- 2 3" OUTLET
- 3 3" INLET
- 4 HONDA GX200 ENGINE
- 5 HEAVY-DUTY CAST IRON IMPELLER
- 6 ALUMINUM HOUSING
- 7 BUILT-IN DATA PLATE



IN THE BOX

Engine Oil, Funnel & Screwdriver

WP-3065HL

ECOM Ecom Ready Product

Scan for full specs and
product comparisons

SEMI-TRASH TRANSFER PUMPS

ALUMINUM HOUSING • CAST IRON IMPELLER • 5/8" MAX SOLIDS • TOOLLESS PUMP BODY ACCESS



COMMERCIAL SERIES

TP-2065HT



WORKSHOP SERIES

TP-3070R



COMMERCIAL SERIES

TP-3065HR


ENGINE TYPE CC	Honda GX200 / 196CC	Powerease 225 / 223CC	Honda GX200 / 196CC
FUEL TANK CAP.	3.1 L / 0.82 Gal	3.6 L / 0.95 Gal	3.1 L / 0.82 Gal
GPM / PSI	158 / 33	264 / 36	264 / 36
SUCTION / DISCHARGE / TOTAL LIFT	26' / 59' / 85'	26' / 59' / 85'	26' / 59' / 85'
PORT SIZE	2" Inlet/Outlet	3" Inlet/Outlet	3" Inlet/Outlet
MAX SOLIDS SIZE	5/8"	5/8"	5/8"
HOUSING	Aluminum	Aluminum	Aluminum
IMPELLER	Cast Iron	Cast Iron	Cast Iron
FRAME	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame
TOOLLESS PUMP BODY ACCESS	Yes	Yes	Yes
WARRANTY	Engine: 3 Yrs • Pump: 2 Yrs	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	Engine: 3 Yrs • Pump: 2 Yrs
SHIPPING (WHT & LxWxH)	80 lbs • 21" x 17" x 19"	90 lbs • 21" x 17" x 19"	90 lbs • 21" x 17" x 19"

ECOM

ECOM

ECOM

- 1 POWDER COATED STEEL FRAME
- 2 2" OUTLET
- 3 2" INLET
- 4 TOOLLESS PUMP BODY ACCESS
- 5 HONDA GX200 ENGINE
- 6 HEAVY-DUTY CAST IRON
IMPELLER
- 7 ALUMINUM HOUSING
- 8 BUILT-IN DATA PLATE

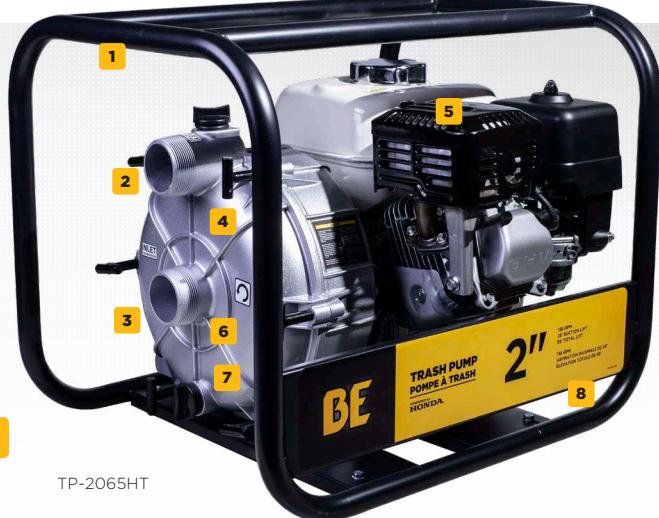

IN THE BOX

Engine Oil, Funnel & Screwdriver

TP-2065HT

ECOM Ecom Ready Product



INDUSTRIAL SERIES

FULL TRASH TRANSFER PUMPS

Scan for full specs and
product comparisons



ALUMINUM HOUSING • CAST IRON IMPELLER • 3/4" MAX SOLIDS • QUICK ACCESS FLANGES



INDUSTRIAL SERIES

TP-2065HR

ENGINE TYPE CC Honda GX200 / 196CC

FUEL TANK CAP. 3.1 L / 0.82 Gal

GPM / PSI 180 / 33

SUCTION /
DISCHARGE /
TOTAL LIFT 26' / 59' / 85'

PORT SIZE 2" Inlet/Outlet

MAX SOLIDS SIZE 3/4"

HOUSING Aluminum

IMPELLER Cast Iron

FRAME Powder Coated Steel Roll Cage Frame

TOOLLESS PUMP
BODY ACCESS Yes

WARRANTY Engine: 3 Yrs • Pump: 2 Yrs

SHIPPING (WHT & LxWxH) 80 lbs • 21" x 17" x 19"

INDUSTRIAL SERIES

TP-3013HM

ENGINE GX390 / 389CC

FUEL TANK CAP. 6.1 L / 1.6 Gal

GPM / PSI 370 / 37

SUCTION /
DISCHARGE /
TOTAL LIFT 26' / 72' / 98'

PORT SIZE 3" Inlet/Outlet

MAX SOLIDS SIZE 1"

HOUSING Aluminum

IMPELLER Cast Iron

FRAME Powder Coated Steel Roll Cage Frame

TOOLLESS PUMP
BODY ACCESS Yes

WARRANTY Engine: 3 Yrs • Pump: 2 Yrs

SHIPPING 144 lbs • 26" x 18" x 22"

INDUSTRIAL SERIES

TP-4013HM

ENGINE GX390 / 389CC

FUEL TANK CAP. 6.1 L / 1.6 Gal

GPM / PSI 580 / 37

SUCTION /
DISCHARGE /
TOTAL LIFT 26' / 69' / 95'

PORT SIZE 4" Inlet/Outlet

MAX SOLIDS SIZE 1"

HOUSING Aluminum

IMPELLER Cast Iron

FRAME Powder Coated Steel Roll Cage Frame

TOOLLESS PUMP
BODY ACCESS Yes

WARRANTY Engine: 3 Yrs • Pump: 2 Yrs

SHIPPING 152 lbs • 26" x 18" x 22"

ECOM

ECOM

1 POWDER COATED STEEL FRAME

2 4" INLET

3 4" OUTLET

4 QUICK ACCESS FLANGES

5 HONDA GX390 ENGINE

6 HEAVY-DUTY CAST IRON
IMPELLER

7 ALUMINUM HOUSING

8 BUILT-IN DATA PLATE



IN THE BOX

Engine Oil, Funnel & Screwdriver

TP-4013HM

ECOM Ecom Ready Product

Scan for full specs and
product comparisons

CHEMICAL TRANSFER PUMPS

30% FIBER/POLYESTER HOUSING & IMPELLER • 0" MAX SOLIDS



WORKSHOP

WORKSHOP

COMMERCIAL

COMMERCIAL

NP-2070R

NP-3070R

NP-2065HR

NP-3065HR

ENGINE TYPE CC	Powerease 225 / 223CC	Powerease 225 / 223CC	Honda GX200 / 196CC	Honda GX200 / 196CC
FUEL TANK CAP.	3.6 L / 0.95 Gal	3.6 L / 0.95 Gal	3.1 L / 0.82 Gal	3.1 L / 0.82 Gal
GPM / PSI	158 / 40	265 / 37	158 / 40	265 / 37
SUCTION / DISCHARGE / TOTAL LIFT	26' / 89' / 115'	26' / 66' / 92'	26' / 89' / 115'	26' / 66' / 92'
PORT SIZE	2" Inlet/Outlet	3" Inlet/Outlet	2" Inlet/Outlet	3" Inlet/Outlet
MAX SOLIDS SIZE	0"	0"	0"	0"
HOUSING	30% Fiber / Poly	30% Fiber / Poly	30% Fiber / Poly	30% Fiber / Poly
IMPELLER	30% Fiber / Poly	30% Fiber / Poly	30% Fiber / Poly	30% Fiber / Poly
FRAME	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame
TOOLLESS PUMP BODY ACCESS	No	No	No	No
WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	Engine: 3 Yrs / Pump: 2 Yrs	Engine: 3 Yrs / Pump: 2 Yrs
SHIPPING (WHT & LxWxH)	60 lbs • 21" x 17" x 19"	64 lbs • 21" x 17" x 19"	60 lbs • 21" x 17" x 19"	64 lbs • 21" x 17" x 19"

- 1 POWDER COATED STEEL FRAME
- 2 2" OUTLET
- 3 2" INLET
- 4 HONDA GX200 ENGINE
- 5 30% FIBER/POLYESTER IMPELLER
- 6 30% FIBER/POLYESTER HOUSING
- 7 BUILT-IN DATA PLATE



IN THE BOX

Engine Oil, Funnel & Screwdriver

NP-2065HR

WORKSHOP SERIES COMMERCIAL SERIES WILDLAND SERIES

Scan for full specs and product comparisons



HIGH PRESSURE TRANSFER PUMPS

ALUMINUM OR CAST IRON HOUSING • ALUMINUM IMPELLER • CAST IRON INLETS & OUTLETS • 0" MAX SOLIDS



WORKSHOP SERIES

HP-2070R

COMMERCIAL SERIES

HP-2065HR

COMMERCIAL SERIES


HP-2013HR

WILDLAND SERIES

WS1565H

ENGINE TYPE CC	Powerease 225 / 223CC	Honda GX200 / 196CC	Honda GX390 / 389CC	Honda GX200 / 196CC
FUEL TANK CAP.	3.6 L / 0.95 Gal	3.1 L / 0.82 Gal	6.1 L / 1.6 Gal	3.1 L / 0.82 Gal
GPM / PSI	126 / 85	126 / 85	140 / 143	85 / 100
SUCTION / DISCHARGE / TOTAL LIFT	26' / 171' / 197'	26' / 171' / 197'	26' / 304' / 330'	26' / 94' / 120'
PORT SIZE	2" Inlet/Outlet	2" Inlet/Outlet	2" Inlet/Outlet	1.5" Inlet/Outlet
MAX SOLIDS SIZE	0"	0"	0"	0"
HOUSING	Aluminum	Aluminum	Cast Iron	Cast Iron
IMPELLER	Aluminum	Aluminum	Aluminum	Aluminum
FRAME	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Roll Cage Frame	Powder Coated Steel Protective Ergonomic Frame
TOOLLESS PUMP BODY ACCESS	No	No	No	No
WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs	Engine: 3 Yrs • Pump: 2 Yrs	Engine: 3 Yrs • Pump: 2 Yrs	Engine: 3 Yrs • Pump: 2 Yrs
SHIPPING (WHT & LxWxH)	70 lbs • 26" x 18" x 22"	73 lbs • 26" x 18" x 22"	140 lbs • 26" x 18" x 22"	70 lbs • 27" x 18" x 17"

- 1 POWDER COATED STEEL FRAME
- 2 2" CAST IRON OUTLET
- 3 2" CAST IRON INLET
- 4 HONDA GX200 ENGINE
- 5 ALUMINUM IMPELLER
- 6 ALUMINUM HOUSING
- 7 BUILT-IN DATA PLATE

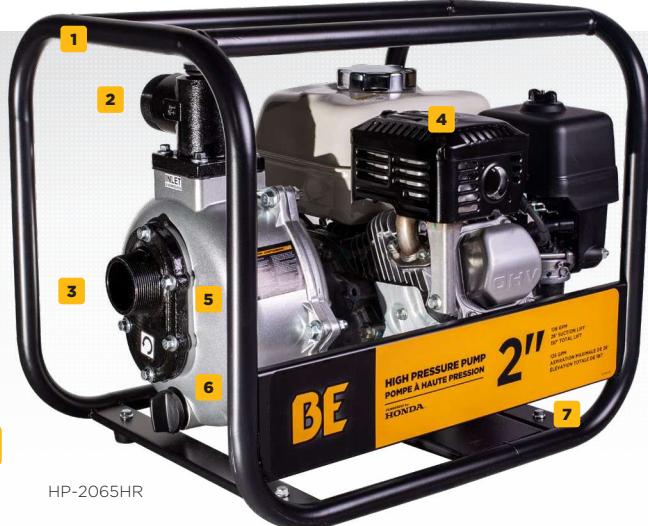

IN THE BOX

Engine Oil, Funnel & Screwdriver

HP-2065HR

HIGH PRESSURE FIRE SUPPRESSION PUMP KIT

Scan for full specs and product comparisons



HP-2070R HIGH PRESSURE TRANSFER PUMP • 50' FIRE HOSE • 12' SUCTION HOSE • FIRE HOSE NOZZLE



HPFK-2070R

ENGINE TYPE CC	Powerease 225 / 223CC
FUEL TANK CAP.	3.6 L / 0.95 Gal
GPM / PSI	126 / 85
SUCTION / DISCHARGE / TOTAL LIFT	26' / 171' / 197'
PORT SIZE	2" Inlet/Outlet
MAX SOLIDS SIZE	0"
HOUSING	Aluminum
IMPELLER	Aluminum
FRAME	Powder Coated Steel Roll Cage Frame
DISCHARGE HOSE	50' Fire Hose
SUCTION HOSE	12' Suction Hose with Foot Valve
NOZZLE	Fire Hose Nozzle
INLET CAMLOCK	2" Female "A" Camlock
OUTLET REDUCER	2" to 1.5" Reducing Adapter
TOOLLESS PUMP BODY ACCESS	No
WARRANTY	Engine: 3 Yrs / 5 Yrs Reg • Pump: 2 Yrs
SHIPPING	86 lbs • 28" x 20" x 18"
(WHT & LxWxH)	



HPFK-2070R

KIT INCLUDES

50' FIRE HOSE
50.015.001

12' SUCTION HOSE
WITH FOOT VALVE
85.400.079

FIRE HOSE NOZZLE
50.015.002

Free Engine Oil, Funnel & Screwdriver

⚠ Not NFPA approved. Not intended as attack line equipment.

- 1 HP-2070R HIGH PRESSURE TRANSFER PUMP
- 2 POWDER COATED STEEL FRAME
- 3 CAST IRON OUTLET WITH 2" TO 1.5" REDUCING ADAPTER
- 4 CAST IRON INLET WITH 2" FEMALE "A" CAMLOCK
- 5 POWEREASE 225 ENGINE
- 6 ALUMINUM IMPELLER
- 7 ALUMINUM HOUSING
- 8 BUILT-IN DATA PLATE
- 9 50' FIRE HOSE
- 10 FIRE HOSE NOZZLE
- 11 12' SUCTION HOSE WITH FOOT VALVE

COMMERCIAL SERIES

HIGH PRESSURE FIRE SUPPRESSION PUMP KIT

HP-2065HR HIGH PRESSURE TRANSFER PUMP • 50' FIRE HOSE • 12' SUCTION HOSE • FIRE HOSE NOZZLE • TILT BACK FRAME

Scan for full specs and product comparisons



HPFC-2065HR

ENGINE TYPE CC	Honda GX200 / 196CC
FUEL TANK CAP.	3.1 L / 0.82 Gal
GPM / PSI	126 / 85
SUCTION / DISCHARGE / TOTAL LIFT	26' / 171' / 197'
PORT SIZE	2" Inlet/Outlet
MAX SOLIDS SIZE	0"
HOUSING	Aluminum
IMPELLER	Aluminum
FRAME	Powder Coated Steel Portable Tilt Back Frame with Wheels
DISCHARGE HOSE	50' Fire Hose
SUCTION HOSE	12' Suction Hose with Foot Valve
NOZZLE	Fire Hose Nozzle
INLET CAMLOCK	2" Female "A" Camlock
OUTLET REDUCER	2" to 1.5" Reducing Adapter
WHEELS	10" Premium Flat Free
TOOLLESS PUMP BODY ACCESS	No
WARRANTY	Engine: 3 Yrs • Pump: 2 Yrs
SHIPPING	130 lbs • 30" x 29" x 23"



HPFC-2065HR



- 1 TILT BACK POWDER COATED STEEL PORTABLE FRAME
- 2 BUILT-IN DATA PLATE
- 3 12' SUCTION HOSE WITH FOOT VALVE
- 4 50' FIRE HOSE WITH FIRE HOSE NOZZLE
- 5 HP-2065HR HIGH PRESSURE TRANSFER PUMP
- 6 HONDA GX200 ENGINE
- 7 10" PREMIUM FLAT FREE WHEELS/TIRES
- 8 CAST IRON INLET WITH 2" FEMALE "A" CAMLOCK
- 9 CAST IRON OUTLET WITH 2" TO 1.5" REDUCING ADAPTER
- 10 ALUMINUM IMPELLER & HOUSING

KIT INCLUDES

 50' FIRE HOSE
50.015.001

 12' SUCTION HOSE
WITH FOOT VALVE
85.400.079

 FIRE HOSE NOZZLE
50.015.002

Free Engine Oil, Funnel & Screwdriver

! Not NFPA approved. Not intended as attack line equipment.

PORTABLE WATER PUMP CONVERSION KIT

THE KIT INCLUDES ALL THE PARTS NEEDED TO CONVERT ANY BE TRANSFER PUMP INTO A PORTABLE WHEELED UNIT

PART#: 85.561.011


IN THE BOX




2 WHEELS



**2 AXLES
WITH AXLE PINS**



**2 SUPPORT FEET
WITH NUTS AND BOLTS**



**2 HANDLEBARS
WITH NUTS AND BOLTS**

PORTABLE WATER PUMP CONVERSION KIT

Part#: 85.561.011

- 1** 2 x FLAT FREE WHEELS
- 2** 2 x AXLES WITH AXLE PINS
- 3** 2 x HANDLEBARS WITH NUTS AND BOLTS
- 4** 2 x SUPPORT FEET WITH NUTS AND BOLTS

Water pump not included with the conversion kit



TP-2065HT with 85.561.011 conversion kit installed

Scan for full specs



MOBILITY MADE EASY FOR EVERY BE TRANSFER PUMP

Convert your BE water pump into a rugged, portable unit. Roll it where you need it, set it down, and get the job done.

- Flat-free wheels for easy transport
- Fold-down handlebars for control
- Heavy-duty support feet for stability
- Universal fit for all BE pumps



**WATCH HOW TO INSTALL
THE PORTABLE PUMP KIT**

FIREFIGHTING CONVERSION

THE PARTS NEEDED TO CONVERT 2" HIGH PRESSURE PUMPS INTO A FIRE-READY SYSTEM



SUCTION INLET

1 SUCTION HOSE WITH FOOT VALVE STRAINER

85.400.079



Connect to pump inlet

2 2" FEMALE "A" CAMLOCK

90.390.200



DISCHARGE OUTLET

Connect to pump outlet



1 2" TO 1.5" REDUCING ADAPTER


50.015.007



Connect to 1.5" FNPSH adapter



Connect to fire hose



Connect to 1.5" MNPT adapter



Connect to fire nozzle



COMPATIBLE WITH:



HP-2065HR



HP-2070R



HP-2013HR



**FIRE SUPPRESSION ONLY.
NOT FOR DIRECT FIRE COMBAT.**

These high-pressure water pumps and conversion kits are designed for suppression support, not firefighting attack lines. They are ideal for spraying water around property perimeters or transferring water from tanks and ponds.

Not NFPA approved. Not intended as attack line equipment.



BUY AS A COMPLETE KIT FIRE HOSE DISCHARGE/OUTLET KIT

50.015.007 | 50.015.004 | 50.015.001 | 50.015.003 | 50.015.002

ORDER PART: 50.015.010

ACCESSORIES FOR WATER PUMPS

STRAINERS



WATER PUMP PLASTIC REPLACEMENT STRAINERS

2" SIZE

50.002.400

3" SIZE

50.003.400

4" SIZE

50.004.400



WATER PUMP METAL REPLACEMENT STRAINER

2" SIZE

50.002.012



FOOT VALVE

2" SIZE

50.002.301



TRASH PUMP REPLACEMENT STRAINERS

2" SIZE / METAL

50.002.014

3" SIZE / METAL

50.103.205

4" SIZE / METAL / FILTER MESH ASSEMBLY

50.103.404

CAMLOCKS



POLYPROPYLENE CAMLOCK FITTING

2" SIZE / TYPE A

90.737.040

3" SIZE / TYPE A

90.720.300



ALUMINUM CAMLOCK FITTING

2" SIZE / TYPE A

90.390.200

3" SIZE / TYPE A

90.390.300

4" SIZE / TYPE A

90.390.400

HOSE KITS



WATER PUMP DISCHARGE HOSE KITS

Temperature rating of 65.5°C / 150°F

1" SIZE / 50' LENGTH / 80 PSI

85.400.084

2" SIZE / 50' LENGTH / 80 PSI

85.400.085

3" SIZE / 50' LENGTH / 65 PSI

85.400.086

4" SIZE / 50' LENGTH / 55 PSI

85.400.087

SUCTION HOSE KIT

UI approved non-collapsible suction hose

- 1.5" SIZE / 20' LENGTH
- 1.5" TYPE A CAMLOCK
- 1.5" SUCTION STRAINER

50.400.000

- 1" SIZE / 20' LENGTH

- ALUMINUM CAMLOCK

- NYLON STRAINER

85.400.088

- 2" SIZE / 20' LENGTH

- ALUMINUM CAMLOCK

- STEEL STRAINER

85.400.089

- 3" SIZE / 20' LENGTH

- ALUMINUM CAMLOCK
- STEEL STRAINER

85.400.090

- 4" SIZE / 20' LENGTH
- ALUMINUM CAMLOCK
- STEEL STRAINER

85.400.091




youtube.com/bepowerequipment

POWER UP YOUR KNOW-HOW WITH BE ON YOUTUBE

TUTORIALS, TROUBLESHOOTING, AND EXPERT INSIGHTS.


Our YouTube channel gives you instant access to step-by-step tutorials, expert tech talks, and product insights to keep your equipment performing at its best. From simple startup procedures to advanced troubleshooting, you'll find the knowledge you need, right when you need it.

- ✓ On-the-spot how-to guides and troubleshooting videos
- ✓ Expert tips to maximize performance and extend equipment life
- ✓ Product insights to help you choose the right tools for the job

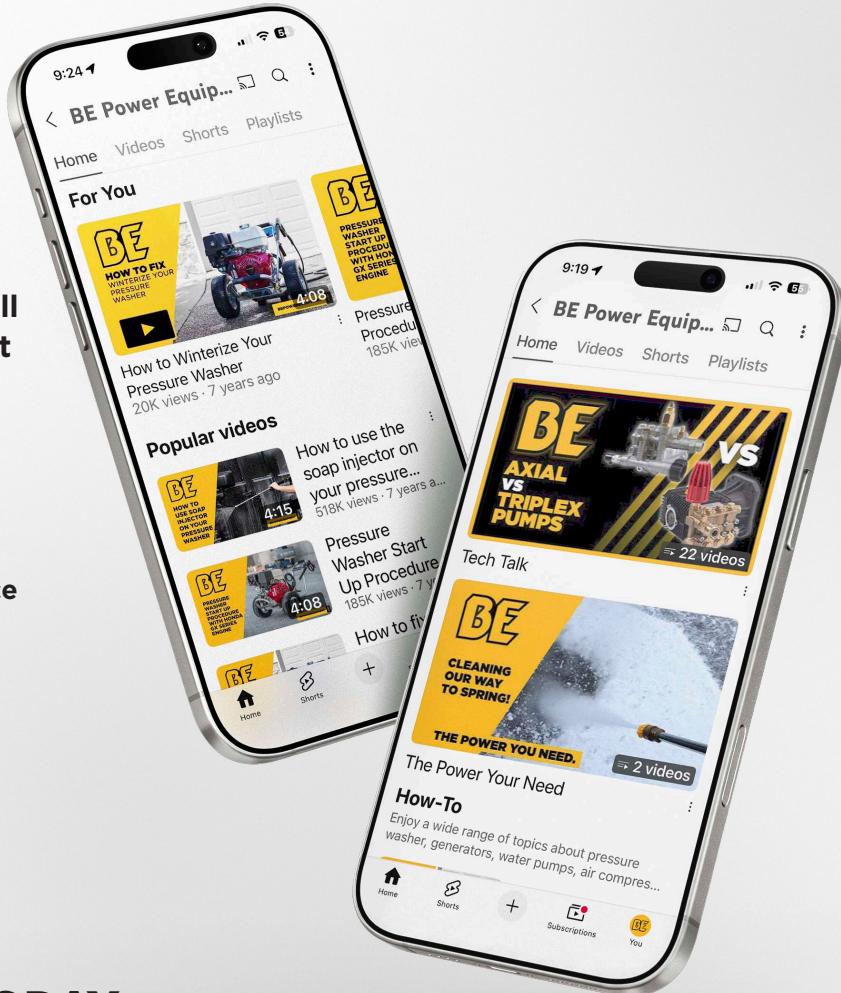

**SUBSCRIBE TODAY
AND POWER UP YOUR
KNOWLEDGE!**

POWEEASE ENGINES

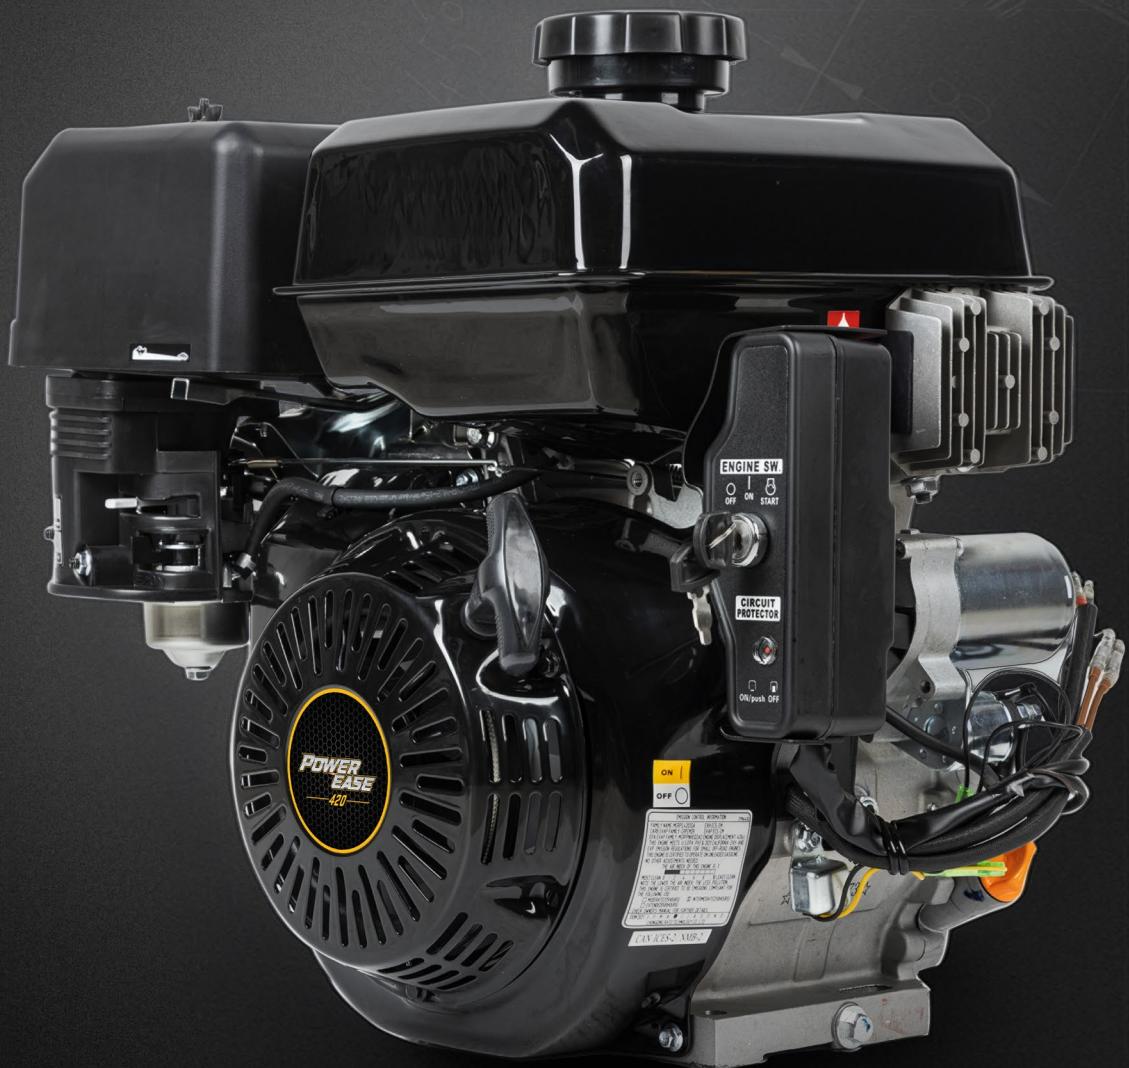

POWEEASE®
ENGINES

#THEPOWERYOUNEED

POWER-EASE®
ENGINES

ENGINES

Scan for full specs and
product comparisons

5-YEAR WARRANTY ON REGISTRATION • EPA CARB APPROVED



85.570.070



85.570.150



85.578.150

MODEL	225	420	420-18a
ENGINE TYPE	Air-Cooled 4-Stroke OHV	Air-Cooled 4-Stroke OHV	Air-Cooled 4-Stroke OHV
DISPLACEMENT	223CC	420CC	420CC
START SYSTEM	Recoil	Recoil	Recoil / Electric
IGNITION SYSTEM	Transistorized Magneto	Transistorized Magneto	Transistorized Magneto
COMPRESSION RATIO	8.5:1	8.2:1	8.2:1
AMP CHARGE	N/A	N/A	18
FUEL TANK CAPACITY	3.6 L (0.95 Gal)	6.7 L (1.77 Gal)	6.7 L (1.77 Gal)
FUEL	Unleaded 86 Octane or Higher	Unleaded 86 Octane or Higher	Unleaded 86 Octane or Higher
CARBURETOR	Horizontal Type Butterfly Valve	Horizontal Type Butterfly Valve	Horizontal Type Butterfly Valve
LUBRICATION SYSTEM	Splash	Splash	Splash
OIL CAPACITY	0.6 L (0.63 U.S. QTS)	1.1 L (1.16 U.S. QTS)	1.1 L (1.16 U.S. QTS)
LOW OIL SHUTDOWN	Yes	Yes	Yes
SHAFT SIZE	3/4" Keyed	1" Keyed	1" Keyed
SHAFT ORIENTATION	Horizontal	Horizontal	Horizontal
KEY WAY SIZE	3/16" x 1.75"	1/4" x 2.2"	1/4" x 2.2"
SHAFT ROTATION	Counterclockwise	Counterclockwise	Counterclockwise
NET TORQUE	9.1 LB-FT (12.4 NM) @ 2,500 RPM	17.8 LB-FT (24 NM) @ 2,500 RPM	17.8 LB-FT (24 NM) @ 2,500 RPM
NET POWER OUTPUT*	6.03 HP (4.5 KW) @ 3,600 RPM	12.6 HP (9.4 KW) @ 3,600 RPM	12.6 HP (9.4 KW) @ 3,600 RPM
BORE X STROKE	68 mm x 54 mm	88 mm x 64 mm	88 mm x 64 mm
AIR CLEANER	3/16" x 1.75"	1/4" x 2.2"	1/4" x 2.2"
WARRANTY	2 Years / 5 Years Registered	2 Years / 5 Years Registered	2 Years / 5 Years Registered
SHIPPING (WHT & LxWxH)	35 lbs • 16" x 14" x 14"	68 lbs • 17" x 18" x 18"	70 lbs • 17" x 18" x 18"

- 1** AIR CLEANER
- 2** 6.7 L (1.77 GAL) GAS TANK
- 3** THROTTLE LEVER
- 4** CHOKE LEVER
- 5** RECOIL STARTER
- 6** FUEL VALVE
- 7** FUEL FILLER CAP
- 8** ELECTRIC STARTER
- 9** OIL FILLER CAP



85.578.150

*The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3,600 RPM (net power) and at 2,500 RPM (max net torque). Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Electric Start

POWEEASE®
ENGINES

THE NEXT LEVEL OF POWER

**POWEEASE MULTI-PURPOSE
ENGINES DELIVER RELIABILITY,
EFFICIENCY, AND TORQUE
WHEN IT COUNTS.**



APPLICABLE ON QUALIFYING
PRODUCTS UPON REGISTRATION

ECOM / E-COMMERCE READY PRODUCTS



WHAT MAKES A PRODUCT ECOM READY

BE ecom ready products meet the full requirements for modern online retail. Each one includes:

- **Complete digital assets:** Long and short product descriptions, features, and specs ready for web listings.
- **High-quality images:** Lifestyle, carousel, and detailed product shots optimized for e-commerce platforms.
- **Infographics and callouts:** Clearly communicate key benefits at a glance on product pages.
- **Retail ready or protective packaging:** Ensures safe, professional delivery directly to the customer.

RETAIL READY PACKAGING

Most ecom ready products also feature our retail ready packaging. Designed for both store shelves and online fulfillment, RRP units combine eye-catching design with secure, efficient shipping.



**LOOK FOR THE
ECOM BADGE
THROUGHOUT THE
CATALOG FOR ECOM
READY PRODUCTS.**



REPLACEMENT PUMPS

PMR / PUMPS MADE READY

The Pumps Made Ready logo (PMR) verifies that the pump is a complete replacement pump. All you do is unbolt your existing pump and bolt on the new one. They ship with an unloader installed, 3/8" QC for the pressure hose, 3/4" garden hose inlet with filter, thermal relief valve, soap injector, and oil.

- ✓ Total pump assembly replacement with minimal time and effort
- ✓ Remove the old pump and slide on a Pump Made Ready
- ✓ Take the guess work out of replacing a pump assembly



#THEPOWERYOU NEED

P1 PUMP

VERTICAL • AXIAL PUMP • DIRECT DRIVE • GAS • 7/8" SHAFT • BUILT-IN UNLOADER

Scan for full specs and
product comparisons

PMR PART

85.129.116SXB

BARE PUMP PART

N/A

PUMP MANUFACTURER

CP

PUMP MODEL

CAG2

DIRECT DRIVE

Gas

SHAFT SIZE

7/8"

PUMP STYLE

Axial

MAX PSI

3,000

MAX GPM

2.2

UNLOADER TYPE

Built-In

PLUNGER (PISTON)

Tempered Steel

INLET SIZE

3/4" GHF

DISCHARGE SIZE

M22

SOAP INJECTOR

Fixed

MANIFOLD TYPE

Aluminum

RPM

3,400

MAX INLET TEMP

43°C / 110°F

THERMAL RELIEF VALVE

85.300.022

OIL CAPACITY

2.2 fl oz

OIL TYPE

30W Non Detergent


WEIGHT

7.3 lbs

WARRANTY

5 Years

RRP

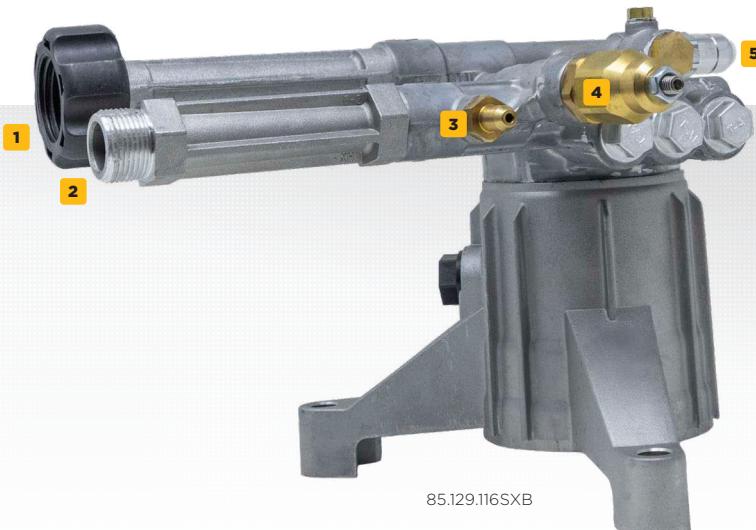

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

85.129.116SXB

PMR / PUMPS MADE READY

P2 PUMP

AXIAL PUMP • DIRECT DRIVE • GAS • 3/4" SHAFT • BUILT-IN UNLOADER

Scan for full specs and product comparisons



PMR PART

85.179.112B

BARE PUMP PART

N/A

PUMP MANUFACTURER

CP

PUMP MODEL

CAG1

DIRECT DRIVE

Gas

SHAFT SIZE

3/4"

PUMP STYLE

Axial

MAX PSI

3,400

MAX GPM

2.5

UNLOADER TYPE

Built-In

PLUNGER (PISTON)

Stainless Steel

INLET SIZE

3/4" GHF

DISCHARGE SIZE

M22

SOAP INJECTOR

Fixed

MANIFOLD TYPE

Aluminum

RPM

3,450

MAX INLET TEMP

52°C / 125°F

THERMAL RELIEF VALVE

85.300.022

OIL CAPACITY

2.2 fl oz

OIL TYPE

30W Non Detergent

WEIGHT

7.5 lbs

WARRANTY

5 Years

RRP



- 1 FIXED CHEMICAL INJECTION PORT
- 2 QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 3 BUILT-IN UNLOADER
- 4 THERMAL RELIEF VALVE
- 5 3/4" INLET FOR GARDEN HOSE

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

P3 PUMP

Scan for full specs and
product comparisons

TRIPLEX PUMP • DIRECT DRIVE • GAS • 3/4" SHAFT • BUILT-IN UNLOADER



PMR PART

85.179.185B

BARE PUMP PART

N/A

PUMP MANUFACTURER

CP

PUMP MODEL

CTG1

DIRECT DRIVE

Gas

SHAFT SIZE

3/4"

PUMP STYLE

Triplex

MAX PSI

3,800

MAX GPM

2.5

UNLOADER TYPE

Built-In

PLUNGER (PISTON)

Ceramic

INLET SIZE

3/4" GHF

DISCHARGE SIZE

3/8" Brass QC

SOAP INJECTOR

Fixed

MANIFOLD TYPE

Brass

RPM

3,450

MAX INLET TEMP

60°C / 140°F

THERMAL RELIEF VALVE

N/A

OIL CAPACITY

16 fl oz

OIL TYPE

30W Non Detergent

WEIGHT

14 lbs

WARRANTY

7 Years

RRP

- 1 ADJUSTABLE PRESSURE BUILT-IN UNLOADER
- 2 FIXED CHEMICAL INJECTION PORT
- 3 QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 4 3/4" INLET FOR GARDEN HOSE
- 5 BRASS MANIFOLD
- 6 OIL FILL PORT
- 7 THERMAL RELIEF VALVE



PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

PMR / PUMPS MADE READY

P3+ PUMP

TRIPLEX PUMP • DIRECT DRIVE • GAS & ELECTRIC OPTIONS • 3/4" SHAFT • EXTERNAL UNLOADER

Scan for full specs and product comparisons



PMR PART #	85.129.105B	85.139.020SPB	85.139.023B
BARE PUMP PART #	85.120.105B	N/A	N/A
PUMP MANUFACTURER	CP	GP	GP
PUMP MODEL	CTG1S	TP2530	TT2035EBF
DIRECT DRIVE	Gas	Gas	Electric
SHAFT SIZE	3/4"	3/4"	3/4"
PUMP STYLE	Triplex	Triplex	Triplex
MAX PSI	3,100	3,100	2,000
MAX GPM	3.1	3.1	3.5
UNLOADER TYPE	External	External	External
PLUNGER (PISTON)	Ceramic	Ceramic	Ceramic
INLET SIZE	3/4" GHF	3/4" GHF	3/4" GHF
DISCHARGE SIZE	3/8" Brass QC	3/8" Brass QC	3/8" Brass QC
SOAP INJECTOR	Adjustable	Adjustable	Adjustable
MANIFOLD TYPE	Brass	Brass	Brass
RPM	3,450	3,450	3,450
MAX INLET TEMP	60°C / 140°F	74°C / 165°F	74°C / 165°F
THERMAL RELIEF VALVE	85.300.024	85.300.023	85.300.023
OIL CAPACITY	9.75 fl oz	11 fl oz	11.2 fl oz
OIL TYPE	30W Non Detergent	30W Non Detergent	30W Non Detergent
WEIGHT	10 lbs	11.5 lbs	11.5 lbs
WARRANTY	7 Years	5 Years	5 Years

- 1 ADJUSTABLE PRESSURE EXTERNAL UNLOADER
- 2 QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 3 3/4" INLET FOR GARDEN HOSE
- 4 BRASS MANIFOLD
- 5 OIL FILL PORT
- 6 THERMAL RELIEF VALVE



85.139.023B

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

P4 PUMP

Scan for full specs and
product comparisons


TRIPLEX PUMP • DIRECT DRIVE • GAS • 1" SHAFT • EXTERNAL UNLOADER



PMR PART #	85.179.175B	85.119.031B
BARE PUMP PART #	N/A	N/A
PUMP MANUFACTURER	CP	CAT
PUMP MODEL	CTG2	67DX39G1I
DIRECT DRIVE	Gas	Gas
SHAFT SIZE	1"	1"
PUMP STYLE	Triplex	Triplex
MAX PSI	4,400	4,200
MAX GPM	4.2	4.2
UNLOADER TYPE	Built-In	Built-In
PLUNGER (PISTON)	Ceramic	Ceramic
INLET SIZE	3/4" GHF	3/4" GHF
DISCHARGE SIZE	3/8" Brass QC	3/8" Brass QC
SOAP INJECTOR	Fixed	Fixed
MANIFOLD TYPE	Brass	Brass
RPM	3,450	3,450
MAX INLET TEMP	60°C / 140°F	60°C / 140°F
THERMAL RELIEF VALVE	85.300.022	85.300.024
OIL CAPACITY	16 fl oz	13.5 fl oz
OIL TYPE	30W Non Detergent	30W Non Detergent
WEIGHT	14 lbs	17 lbs
WARRANTY	7 Years	5 Years

RRP

- 1 ADJUSTABLE PRESSURE BUILT-IN UNLOADER
- 2 FIXED CHEMICAL INJECTION PORT
- 3 QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 4 3/4" INLET FOR GARDEN HOSE
- 5 BRASS MANIFOLD
- 6 OIL FILL PORT
- 7 THERMAL RELIEF VALVE

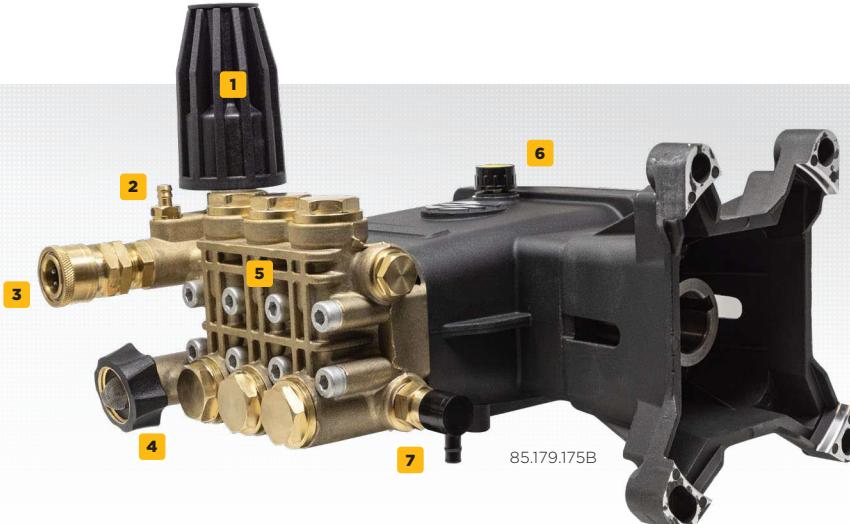

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

PMR / PUMPS MADE READY

P4+ PUMP

TRIPLEX PUMP • DIRECT DRIVE • GAS • 1" SHAFT • EXTERNAL UNLOADER

Scan for full specs and product comparisons



PMR PART #	85.129.142B	85.139.021B	85.119.025B
BARE PUMP PART #	85.120.142B	85.130.021B	N/A
PUMP MANUFACTURER	CP	GP	CAT
PUMP MODEL	CTG2S	EZ4040	66DX40G1I
DIRECT DRIVE	Gas	Gas	Gas
SHAFT SIZE	1"	1"	1"
PUMP STYLE	Triplex	Triplex	Triplex
MAX PSI	4,400	4,200	4,200
MAX GPM	4.2	4.2	4.2
UNLOADER TYPE	External	External	External
PLUNGER (PISTON)	Ceramic	Ceramic	Ceramic
INLET SIZE	3/4" GHF	3/4" GHF	3/4" GHF
DISCHARGE SIZE	3/8" Brass QC	3/8" Brass QC	3/8" Brass QC
SOAP INJECTOR	Fixed	Adjustable	Adjustable
MANIFOLD TYPE	Brass	Brass	Brass
RPM	3,450	3,450	3,450
MAX INLET TEMP	60°C / 140°F	74°C / 165°F	60°C / 140°F
THERMAL RELIEF VALVE	85.300.022	85.300.023	85.300.023
OIL CAPACITY	13.5 fl oz	14 fl oz	18 fl oz
OIL TYPE	30W Non Detergent	30W Non Detergent	30W Non Detergent
WEIGHT	18 lbs	20 lbs	27 lbs
WARRANTY	7 Years	5 Years	5 Years

- 1 ADJUSTABLE PRESSURE EXTERNAL UNLOADER
- 2 THERMAL RELIEF VALVE
- 3 QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 4 3/4" INLET FOR GARDEN HOSE
- 5 BRASS MANIFOLD

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.



85.139.021B

P5 PUMP

Scan for full specs and
product comparisons

TRIPLEX PUMP • DIRECT DRIVE • ELECTRIC • 5/8" SHAFT • BUILT-IN UNLOADER



PMR PART

85.129.183B

BARE PUMP PART

N/A

PUMP MANUFACTURER

CP

PUMP MODEL

CTE1

DIRECT DRIVE

Electric

SHAFT SIZE

5/8"

PUMP STYLE

Triplex

MAX PSI

2,500

MAX GPM

2.5

UNLOADER TYPE

Built-In

PLUNGER (PISTON)

Ceramic

INLET SIZE

3/4" GHF

DISCHARGE SIZE

3/8" Brass QC

SOAP INJECTOR

Fixed

MANIFOLD TYPE

Brass

RPM

3,450

MAX INLET TEMP

60°C / 140°F

THERMAL RELIEF VALVE

85.300.022

OIL CAPACITY

5.5 fl oz

OIL TYPE

30W Non Detergent

WEIGHT

8.8 lbs

WARRANTY

7 Years

- 1 ADJUSTABLE PRESSURE BUILT-IN UNLOADER
- 2 FIXED CHEMICAL INJECTION PORT
- 3 OIL FILL PORT
- 4 BRASS MANIFOLD
- 5 QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 6 3/4" GARDEN HOSE INLET
- 7 THERMAL RELIEF VALVE



PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

85.129.183B

PMR / PUMPS MADE READY

P6 PUMP

TRIPLEX PUMP • DIRECT DRIVE • ELECTRIC • 11/8" SHAFT • EXTERNAL UNLOADER

Scan for full specs and product comparisons

**PMR PART #****85.129.133B****BARE PUMP PART #**

85.120.133B

PUMP MANUFACTURER

CP

PUMP MODEL

CTE2S

DIRECT DRIVE

Electric

SHAFT SIZE

11/8"

PUMP STYLE

Triplex

MAX PSI

3,500

MAX GPM

4.6

UNLOADER TYPE

External

PLUNGER (PISTON)

Ceramic

INLET SIZE

3/4" GHF

DISCHARGE SIZE

3/8" Brass QC

SOAP INJECTOR

Adjustable

MANIFOLD TYPE

Brass

RPM

1,725

MAX INLET TEMP

60°C / 140°F

THERMAL RELIEF VALVE

85.300.023

OIL CAPACITY

13.3 fl oz

OIL TYPE

30W Non Detergent

WEIGHT

17 lbs

WARRANTY

7 Years

- 1** ADJUSTABLE PRESSURE EXTERNAL UNLOADER
- 2** QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 3** THERMAL RELIEF VALVE
- 4** 3/8" INLET FOR GARDEN HOSE
- 5** BRASS MANIFOLD
- 6** OIL FILL PORT



85.129.133B

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.



Scan for full specs and
product comparisons

P8 PUMP

TRIPLEX PUMP • BELT DRIVE • SOLID SHAFT • GAS/ELECTRIC • 24MM SHAFT • EXTERNAL UNLOADER



PMR PART #	85.129.190B	85.129.106B	85.139.005B	85.139.026B
BARE PUMP PART #	85.120.190B	85.120.106B	85.130.005B	85.130.026B
PUMP MANUFACTURER	CP	CP	GP	GP
PUMP MODEL	CTB4S	CTB1S	TSS1511	TS2021
BELT DRIVE SOLID SHAFT	Gas / Electric	Gas / Electric	Gas / Electric	Gas / Electric
SHAFT SIZE	24 mm	24 mm	24 mm	24 mm
PUMP STYLE	Triplex	Triplex	Triplex	Triplex
MAX PSI	3,500	4,000	4,200	3,500
MAX GPM	5.5	4.0	4.2	5.6
UNLOADER TYPE	External	External	External	External
PLUNGER (PISTON)	Ceramic	Ceramic	Ceramic	Ceramic
INLET SIZE	3/4" GHF	3/4" GHF	3/4" GHF	3/4" GHF
DISCHARGE SIZE	3/8" Brass QC	3/8" Brass QC	3/8" Brass QC	3/8" Stainless Steel QC
SOAP INJECTOR	Adjustable	Adjustable	Adjustable	Adjustable
MANIFOLD TYPE	Nickel Plated Brass	Nickel Plated Brass	Brass	Nickel Plated Brass
RPM	1,450	1,450	1,450	1,450
MAX INLET TEMP	60°C / 140°F	60°C / 140°F	74°C / 165°F	74°C / 165°F
THERMAL RELIEF VALVE	85.300.024	85.300.024	85.300.023	85.300.023
OIL CAPACITY	32 fl oz	32 fl oz	37 fl oz	37 fl oz
OIL TYPE	30W Non Detergent	30W Non Detergent	30W Non Detergent	30W Non Detergent
WEIGHT	27.5 lbs	27.5 lbs	32 lbs	32 lbs
WARRANTY	7 Years	7 Years	5 Years	5 Years

- 1** ADJUSTABLE PRESSURE EXTERNAL UNLOADER
- 2** OIL FILL PORT
- 3** QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 4** THERMAL RELIEF VALVE
- 5** 3/4" INLET FOR GARDEN HOSE
- 6** BRASS MANIFOLD
- 7** BELT DRIVE SOLID SHAFT



PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

85.129.190B

PMR / PUMPS
MADE READY


P10 PUMP

TRIPLEX PUMP • BELT DRIVE • SOLID SHAFT • GAS/ELECTRIC • 24MM SHAFT • EXTERNAL UNLOADER

Scan for full specs and
product comparisons

PMR PART #	85.129.171B	85.139.071B
BARE PUMP PART #	85.120.171B	85.130.071B
PUMP MANUFACTURER	CP	GP
PUMP MODEL	CTB2S	TSF2021
BELT DRIVE SOLID SHAFT	Gas / Electric	Gas / Electric
SHAFT SIZE	24 mm	24 mm
PUMP STYLE	Triplex	Triplex
MAX PSI	4,100	4,000
MAX GPM	8.5	8.5
UNLOADER TYPE	External	External
PLUNGER (PISTON)	Ceramic	Ceramic
INLET SIZE	3/4" GHF	3/4" GHF
DISCHARGE SIZE	3/8" Brass QC	3/8" Brass QC
SOAP INJECTOR	Adjustable	Adjustable
MANIFOLD TYPE	Brass	Brass
RPM	1,750	1,750
MAX INLET TEMP	74°C / 165°F	74°C / 165°F
THERMAL RELIEF VALVE	85.300.022	85.300.023 (optional)
OIL CAPACITY	37 fl oz	37 fl oz
OIL TYPE	30W Non Detergent	30W Non Detergent
WEIGHT	40 lbs	42 lbs
WARRANTY	7 Years	5 Years

- 1** ADJUSTABLE PRESSURE EXTERNAL UNLOADER
- 2** OIL FILL PORT
- 3** QUICK CONNECT HIGH PRESSURE HOSE OUTLET
- 4** OIL DRAIN HOSE
- 5** MOUNT FOR GARDEN HOSE INLET
- 6** BRASS MANIFOLD

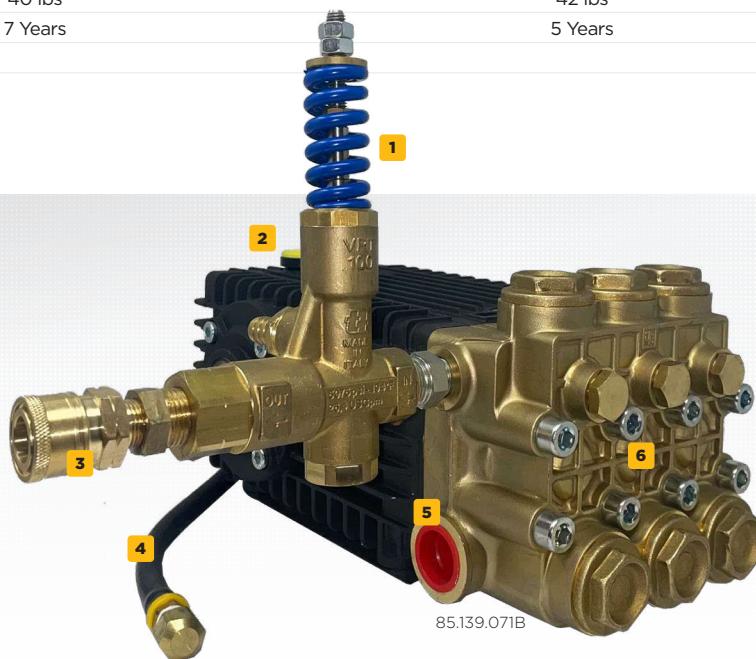

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.

P11 PUMP

TRIPLEX PUMP • BELT DRIVE • SOLID SHAFT • GAS/ELECTRIC • 24MM SHAFT • EXTERNAL UNLOADER

Scan for full specs and
product comparisons

Bare Pump Shown



PMR PART #	N/A
BARE PUMP PART #	85.120.159B
PUMP MANUFACTURER	CP
PUMP MODEL	CTB3S
BELT DRIVE SOLID SHAFT	Gas / Electric
SHAFT SIZE	24 mm
PUMP STYLE	Triplex
MAX PSI	5,100
MAX GPM	5.2
UNLOADER TYPE	External
PLUNGER (PISTON)	Ceramic
INLET SIZE	3/4" GHF
DISCHARGE SIZE	3/8" Stainless Steel QC
SOAP INJECTOR	Adjustable
MANIFOLD TYPE	Brass
RPM	1,450
MAX INLET TEMP	60°C / 140°F
THERMAL RELIEF VALVE	85.300.024
OIL CAPACITY	37 fl oz
OIL TYPE	30W Non Detergent
WEIGHT	46 lbs
WARRANTY	7 Years

- 1 OIL FILL PORT
- 2 BELT DRIVE SOLID SHAFT
- 3 BRASS MANIFOLD



85.120.159B

PMR configuration available with unloader, discharge, 3/8" QC outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector (not all fittings pictured).

Bare pumps do not include the above fittings.



PMR / PUMPS
MADE READY

REPLACEMENT PUMPS MADE EASY

**ALL OUR PUMPS ARE EASY TO
INSTALL, BUILT TO LAST, AND
READY TO KEEP YOU WORKING.**

PUMPS MADE READY

- Pre-assembled with unloader, discharge, 3/8" quick-connect outlet, 3/4" garden hose inlet, thermal relief valve, and adjustable soap injector. Just connect and start cleaning with fast and easy installation.

DURABLE CONSTRUCTION

- Brass pump heads and stainless steel valves built for long life and heavy-duty use.

CONSISTENT PERFORMANCE

- Delivering high pressure for tough jobs like driveways, siding, and equipment cleaning.

SERVICEABLE DESIGN

- Replaceable seals and valves keep your pump working season after season.

SMOOTH OPERATION

- Precision pistons and bearings reduce vibration and extend equipment life.

RRP / RETAIL READY PRODUCTS



RETAIL READY PACKAGING THAT WORKS HARDER.

Our retail ready packaging does more than protect the product, it helps customers learn, compare, and choose with confidence. Each box includes clear product details to make every purchase easier and every application seamless.



SCAN HERE TO VIEW YOUR PLANOGRAM OPTIONS OR CONTACT YOUR SALES REP TO LEARN MORE



See available RRP products from page 126.

THE BE ADVANTAGE IN RETAIL PACKAGING

INNOVATIVE,
EASY-TO-READ
PRODUCT DETAILS

CLEAR INFORMATION
FOR CONFIDENT
DECISIONS

IMPACTFUL
ACCESSORY DISPLAYS
THAT DRIVE SALES

1 DROPSHIP FRIENDLY PACKAGING



2 BEST PRACTICE PRODUCT INFO



3 STEP-BY-STEP TUTORIALS



4 QR CODES FOR HELP AND GUIDES



5 EASY TO UNDERSTAND SPECS AND CHARTS

RRP / RETAIL READY PRODUCTS

COLD WATER PRESSURE WASHERS

PART #	PRODUCT	PAGE
BE327PX	3,200 PSI 2.5 GPM Cold Water Gas Pressure Washer with Powerease 212CC Engine and Axial Pump	13
BE3475PX	3,400 PSI 2.5 GPM Cold Water Gas Pressure Washer with Powerease 223CC Engine and Axial Pump	13
B327PX	3,200 PSI 2.5 GPM Cold Water Gas Pressure Washer with Powerease 212CC Engine and Axial Pump	14
B3475PX	3,400 PSI 2.5 GPM Cold Water Gas Pressure Washer with Powerease 223CC Engine and Axial Pump	14
B3865HA	3,800 PSI 2.5 GPM Cold Water Gas Pressure Washer with Honda GX200 196CC Engine and Triplex Pump	15
B3875PA	3,800 PSI 2.5 GPM Cold Water Gas Pressure Washer with Powerease 223CC Engine and Triplex Pump	15
B4415PA	4,400 PSI 4.2 GPM Cold Water Gas Pressure Washer with Powerease 420CC Engine and Triplex Pump	18

ELECTRIC PRESSURE WASHERS

PART #	PRODUCT	PAGE
P1715EN	1,700 PSI 1.7 GPM Cold Water Corded Electric Pressure Washer	31
P1915EN	2,000 PSI 1.7 GPM Cold Water Corded Electric Pressure Washer	31
P2115EN	2,150 PSI 1.6 GPM Cold Water Corded Electric Pressure Washer	31
P2018EN	2,000 PSI 1.8 GPM Cold Water Corded Electric Pressure Washer	32
P2314EN	2,300 PSI 1.7 GPM Cold Water Corded Electric Pressure Washer with Detachable Cart	33
P2318EN	2,350 PSI 1.8 GPM Cold Water Corded Electric Pressure Washer with 4-wheel 360° steering	34
P2518EN	2,500 PSI 1.8 GPM Cold Water Corded Electric Pressure Washer with 4-wheel 360° steering	34
P2317EN	2,300 PSI 1.7 GPM Cold Water Corded Electric Pressure Washer	35
P2713EN	2,700 PSI 1.3 GPM Cold Water Corded Electric Pressure Washer	35

PRESSURE WASHERS AND INVERTER/GENERATORS

Locate cold water pressure washers and inverter/generators offered in Retail Ready Packaging.

INVERTERS AND GENERATORS

PART #	PRODUCT	PAGE
BE2800i	2,800/2,200-Watt Gas Powered Inverter Generator with 145CC Recoil Start Engine and CO Detector, 20A 120/240V Outlet	82
BE4000i	4,000/3,200-Watt Gas Powered Inverter Generator with 145CC Recoil Start Engine and CO Detector, 20A 120/240V Outlet	82
BE4700iD	4,700/3,800-Watt Electric Start Dual-Fuel Gas and Propane Inverter Generator with 160CC Engine and CO Detector	83
BE7500iD	7,500/6,000-Watt Electric Start Dual-Fuel Gas and Propane Inverter Generator with 312CC Engine and CO Detector	84
BE10500iT	10,500/8,500-Watt Electric Start Tri-Fuel Gas, Propane and Natural Gas Inverter Generator with 458CC Engine and CO Detector	85
BE3800	3,800/3,000-Watt Gas Powered Portable Generator with 212CC Recoil Start Engine and CO Detector, 30A 120V Outlet	86
BE4800	4,800/3,600-Watt Gas Powered Portable Generator with 223CC Recoil Start Engine and CO Detector, 20A 120/240V Outlet	86
BE7000	7,000/5,500-Watt Gas Portable Generator with 312CC Recoil Start Engine and CO Detector, 20A 120/240V Outlet	87
BE9000	9,000/6,300-Watt Gas Powered Portable Generator with 389CC Recoil Start Engine & CO Detector, 20A 120/240V Outlet	87
BE11000	11,000/7,200-Watt Electric Start Gas Powered Portable Generator with 420CC Engine and CO Detector, 20A 120/240V Outlet	88
BE12500T	12,500/9,000-Watt Electric Start Tri-Fuel Gas, Propane and Natural Gas Portable Generator with 458CC Engine and CO Detector, 20A 120/240V Outlet	89

BE327PX



RRP / RETAIL READY PRODUCTS

FOAM CANNON AND CLEANING SOLUTIONS

PART #	PRODUCT	PAGE
85.490.050	Car Wash Detergent	130
85.490.051	House & Siding Detergent	130
85.490.052	Deck & Fence Detergent	130
85.490.053	Heavy-Duty Degreaser Detergent	130
85.490.060	High Intensity Auto Wash	130
85.400.048	Foam Cannon	130

OILS AND PUMP SAVER

PART #	PRODUCT	PAGE
85.490.000	12 x 1 L / 35.2 Oz Non Detergent Pump Oil	131
85.490.002	12 x 1 L / 35.2 Oz 4-Stroke Small Engine Oil	131
85.490.046	12 x 473 MI / 16 Oz Anti-Freeze Pump Solution	131

QUICK CONNECT NOZZLES AND NOZZLE SETS

PART #	PRODUCT	PAGE
85.210.030BEP	Quick Connect Nozzle Set, 3.0 Orifice	133
85.210.035BEP	Quick Connect Nozzle Set, 3.5 Orifice	133
85.210.040BEP	Quick Connect Nozzle Set, 4.0 Orifice	133
85.210.045BEP	Quick Connect Nozzle Set, 4.5 Orifice	133
85.216.030BEP	15° 1/4" QC, 3.0 Orifice	133
85.216.035BEP	15° 1/4" QC, 3.5 Orifice	133
85.216.040BEP	15° 1/4" QC, 4.0 Orifice	133
85.216.045BEP	15° 1/4" QC, 4.5 Orifice	133
85.216.050BEP	15° 1/4" QC, 5.0 Orifice	133
85.216.055BEP	15° 1/4" QC, 5.5 Orifice	133
85.226.030BEP	25° 1/4" QC, 3.0 Orifice	133
85.226.035BEP	25° 1/4" QC, 3.5 Orifice	133
85.226.040BEP	25° 1/4" QC, 4.0 Orifice	133
85.226.045BEP	25° 1/4" QC, 4.5 Orifice	133
85.226.050BEP	25° 1/4" QC, 5.0 Orifice	133
85.226.055BEP	25° 1/4" QC, 5.5 Orifice	133
85.241.030BEP	40° 1/4" QC, 3.0 Orifice	133
85.241.035BEP	40° 1/4" QC, 3.5 Orifice	133
85.241.040BEP	40° 1/4" QC, 4.0 Orifice	133
85.241.045BEP	40° 1/4" QC, 4.5 Orifice	133
85.241.050BEP	40° 1/4" QC, 5.0 Orifice	133
85.241.055BEP	40° 1/4" QC, 5.5 Orifice	133
85.210.009BEP	Long Range Soaper Nozzle	134
85.266.400BEP	Quick Connect Soaper Nozzle	134



85.210.045BEP

ACCESSORIES

Locate accessories offered in Retail Ready Packaging.

ROTATING TURBO NOZZLES

PART #	PRODUCT	PAGE
85.210.135	Rotary Turbo Nozzle	134
RJ-3030-CS	Rotary Turbo Nozzle	134

QUICK CONNECT FITTINGS AND FITTING SETS

PART #	PRODUCT	PAGE
85.400.207	Female Quick Connect Fitting Kit	135
85.400.210	Male Quick Connect Fitting Kit	135
85.300.101BEP	1/4" FNPT Fitting, Coated Steel	135
85.300.101SBEP	1/4" FNPT Fitting, Stainless Steel	135
85.300.102BEP	1/4" FNPT Fitting, Brass	135
85.300.102SBEP	1/4" FNPT Fitting, Stainless Steel	135
85.300.103BEP	3/8" FNPT Fitting, Brass	135
85.300.103SBEP	3/8" FNPT Fitting, Stainless Steel	135
85.300.104BEP	3/8" FNPT Fitting, Coated Steel	135
85.300.104SBEP	3/8" FNPT Fitting, Stainless Steel	135
85.300.105BEP	3/8" MNPT Fitting, Coated Steel	135
85.300.105SBEP	3/8" MNPT Fitting, Stainless Steel	135
85.300.107BEP	1/4" MNPT Fitting, Brass	135
85.300.107SBEP	1/4" MNPT Fitting, Stainless Steel	135
85.300.108BEP	3/8" MNPT Fitting, Brass	135
85.300.108SBEP	3/8" MNPT Fitting, Stainless Steel	135
85.300.109BEP	1/4" MNPT Fitting, Coated Steel	135
85.300.109SBEP	1/4" MNPT Fitting, Stainless Steel	135

M22 ADAPTER FITTINGS

PART #	PRODUCT	PAGE
85.300.124BEP	Female M22 x 1/4" FNPT	136
85.300.125BEP	Female M22 x 3/8" FNPT	136
85.300.126BEP	Male M22 x 1/4" FNPT	136
85.300.127BEP	Male M22 x 3/8" FNPT	136
85.300.132BEP	Male M22 x 1/4" MNPT	136
85.300.133BEP	Male M22 x 3/8" MNPT	136
85.300.135BEP	Female M22 x 1/4" MNPT	136
85.300.136BEP	Female M22 x 3/8" MNPT	136
85.300.142BEP	Female M22 x 3/8" Plug FNPT	136
85.300.143BEP	Male M22 x 3/8" Coupler MNPT	136
85.300.146BEP	Female M22 x Female M22 FNPT	136
85.300.149BEP	Female M22 (15 mm) x Male M22 (14 mm)	136
85.300.159BEP	Female M22 (14 mm) x Male M22 (15 mm)	136
85.300.166BEP	Male M22 x Male M22 MNPT	136

RRP / RETAIL READY PRODUCTS

PRESSURE GAUGE

PART #	PRODUCT	PAGE
85.305.001	2.5" Pressure Gauge Kit	136

HOSES

PART #	PRODUCT	PAGE
85.225.135BEP	35' Polypropylene Hose	138
85.225.228	25' Single Wire Braid Rubber Hose, Black	138
85.225.229P	25' Thermoplastic Hose	138
85.238.151	50' Single Wire Braid Rubber Hose, Black	138
85.238.156	50' Single Wire Braid Rubber Hose, Grey	138

HOSE REELS

PART #	PRODUCT	PAGE
85.402.001K	100' Hose Reel Kit with Whip Hose	139
85.402.050	50' Hose Reel Kit with Hand Crank	139

ACCESSORIES

Use this table to quickly locate BE accessories offered in Retail Ready Packaging.

SURFACE CLEANERS AND GUTTER CLEANER

PART #	PRODUCT	PAGE
85.403.000	15" Whirl-A-Way Surface Cleaner	140
85.403.014	14" Whirl-A-Way Surface Cleaner	140
85.400.060	12" Water Broom	143
85.400.061	16" Water Broom	143
85.400.062	16" Undercar Water Broom	143
85.400.007BEP	Quick Connect Gutter Cleaner	144

SPRAY GUNS AND GUN/WAND KITS


PART #	PRODUCT	PAGE
85.202.109BEP	High Pressure Spray Gun	145
85.205.026	36" Commercial Spray Gun & Wand Kit	146
85.205.050	36" Spray Gun & Wand Kit	146
85.400.019	Telescoping Wand Belt Kit	147



ACCESSORIES & PARTS



FOAM CANNON

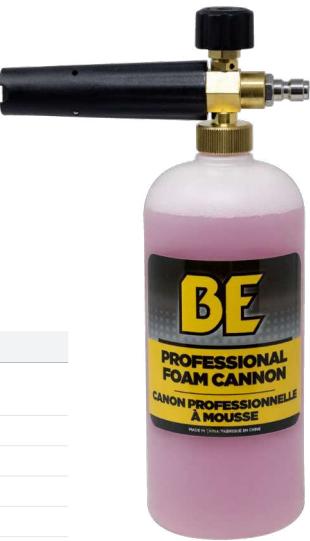

Foam cannon and lance video



- ADJUSTABLE FLOW CONTROLLED NOZZLE
- 1L CHEMICAL TANK

PART #	85.490.047	85.400.048
PRODUCT	Foam Cannon with Auto Wash	Foam Cannon Only (Without Auto Wash)
MAX PSI	4,000	4,000
MAX GPM	6.5	6.5
MAX TEMP	60°C / 140°F	60°C / 140°F
INLET	1/4" QC	1/4" QC

RRP ECOM

85.490.050



85.490.047

CLEANING SOLUTIONS



ORDERED
BY THE BOX



PART #	85.490.050	85.490.051	85.490.052	85.490.053	85.490.060
PRODUCT	Car Wash	House & Siding	Deck & Fence	Heavy-Duty Degreaser	High Intensity Auto Wash
LIQUID COLOUR	PINK	GREEN	YELLOW	PURPLE	PINK
VOLUME	3.78 L / 1 Gal	1 L / 35.2 Oz			
BOX QTY	4	4	4	4	12

CAR WASH 85.490.050



RRP Retail Ready Packaging ECOM Ecom Ready Product

CHEMICAL INJECTORS



85.400.003

PART #	85.400.000	85.400.003
PRODUCT	Adjustable Low Pressure Chemical Injector	Adjustable High Pressure Chemical Injector
MAX GPM	2.0-5.0	3.0-8.0
MAX TEMP	90.5°C / 195°F	82°C / 180°F
INLET	3/8" QC	3/4" FGH
OUTLET	3/8" Plug	3/4" MGHT

OILS



ORDERED BY THE BOX



PART #	85.490.000	85.490.002
PRODUCT	Non Detergent Pump Oil	4-Stroke Small Engine Oil
VOLUME	1 L / 35.2 Oz	1 L / 35.2 Oz
BOX QTY	12	12



85.490.000



CHECK PUMP OIL
Typically on top of the pump.



CHECK ENGINE OIL
with the provided dipstick.



FILL ENGINE OIL
with a funnel.



Engine start video with
pump oil filling procedure

PUMP SAVER



ORDERED BY THE BOX



PART #	85.490.046
PRODUCT	Anti-Freeze Pump Solution
VOLUME	473 MI / 16 Oz
BOX QTY	12



85.490.046



STEP 1
Break seal, screw bottle onto
pump inlet, turn lever to open.



STEP 2
Squeeze bottle to flush water out.



STEP 3
Keep squeezing until pink fluid
exits outlet, close lever, remove
bottle and store washer.



Pump saver and
winterizer video

NOZZLE SIZING CHART FOR PRESSURE WASHERS

Use this chart to select the correct nozzle size for your pressure washer. Match your machine's operating pressure (PSI) with its nearest flow rate (GPM) to find the nozzle that delivers safe, efficient cleaning performance.

ORIFICE SIZE	500 PSI	1000 PSI	1500 PSI	2000 PSI	2500 PSI	3000 PSI	4000 PSI	5000 PSI
2	0.71	1.00	1.22	1.41	1.58	1.73	2.00	2.24
2.5	0.88	1.25	1.53	1.77	1.98	2.17	2.50	2.80
3	1.06	1.50	1.84	2.12	2.37	2.60	3.00	3.35
3.5	1.24	1.75	2.14	2.47	2.77	3.03	3.50	3.91
4	1.41	2.00	2.45	2.83	3.16	3.46	4.00	4.47
4.5	1.59	2.25	2.76	3.18	3.56	3.90	4.50	5.03
5	1.77	2.50	3.06	3.54	3.95	4.33	5.00	5.59
5.5	1.94	2.75	3.37	3.89	4.35	4.76	5.50	6.15
6	2.12	3.00	3.67	4.24	4.74	5.20	6.00	6.71
6.5	2.30	3.25	3.98	4.60	5.14	5.63	6.50	7.27
7	2.47	3.50	4.29	4.95	5.53	6.06	7.00	7.83
7.5	2.65	3.75	4.59	5.30	5.93	6.50	7.50	8.39
8	2.83	4.00	4.90	5.66	6.32	6.93	8.00	8.94
8.5	3.01	4.25	5.21	6.01	6.72	7.36	8.50	9.50
9	3.18	4.50	5.51	6.36	7.12	7.79	9.00	10.06
10	3.54	5.00	6.12	7.07	7.91	8.66	10.00	11.18

EQUATIONS

TO FIND THE NOZZLE SIZE:

Nozzle Size = $GPM \div \sqrt{(PSI \div 4000)}$

TO FIND THE GPM:

$GPM = \text{Nozzle Size} \times \sqrt{(PSI \div 4000)}$

TO FIND THE PSI:

$PSI = (GPM \div \text{Nozzle Size})^2 \times 4000$

THE SHADED CELLS ABOVE SHOW HOW TO FIND THE CORRECT NOZZLE SIZE FOR A MACHINE OPERATING AT 3000 PSI AND 4.0 GPM.

- Choose the PSI, match the nearest GPM, read across for the nozzle size.

Formula: Nozzle Size = $GPM \div \sqrt{(PSI \div 4000)}$

Nozzle Size = $4.0 \div \sqrt{(3000 \div 4000)}$

Nozzle Size = $4.0 \div 0.866 \approx 4.6$

Use a #4.5 Nozzle

SPRAY ANGLES

Choose the right spray angle for every job

0° - PINPOINT JET

Produces a concentrated jet stream for maximum cutting power, ideal for removing tough buildup in small areas.

Best for:

- Removing caked-on mud, tar, or grease
- Spot cleaning rust or paint when stripping is intended
- Reaching narrow gaps or cracks

Caution: Too aggressive for most surfaces and can cause damage.

15° - NARROW STRIP

Delivers a narrow, high-pressure spray that cuts through heavy dirt and coatings while still covering more surface than a pinpoint jet.

Best for:

- Heavy-duty cleaning on concrete, brick, or metal
- Stripping paint or coatings
- Removing stubborn stains and debris

25° - GENERAL CLEANING

Provides a versatile medium-width spray with strong cleaning power, perfect for most surfaces and everyday cleaning.

Best for:

- Decks, driveways, and siding
- Patio furniture, fences, and vehicles
- General outdoor cleaning jobs

40° - WIDE FAN

Creates a wide, gentle spray that safely rinses large areas and delicate surfaces without causing damage.

Best for:

- Washing windows, vehicles, and boats
- Rinsing off detergents and cleaners
- Light cleaning on wood, vinyl, or painted surfaces

65° - SOAPER NOZZLE

Produces a wide, low-pressure spray designed to apply soap or detergent for deep cleaning preparation.

Best for:

- Pre-soaking siding and fences
- Washing vehicles and boats
- Applying detergent to large surfaces



WATCH A VIDEO ON
CHOOSING THE RIGHT
NOZZLE FOR EVERY JOB

QC NOZZLES

MAX PSI: 5,000 • MAX TEMP: 100°C/212°F



ORIFICE	0°	15°	25°	40°
2	85.201.020	85.216.020	85.226.020	85.241.020
2.5	85.201.025	85.216.025	85.226.025	85.241.025
3	85.201.030	85.216.030*	85.226.030*	85.241.030*
3.5	85.201.035	85.216.035*	85.226.035*	85.241.035*
4	85.201.040	85.216.040*	85.226.040*	85.241.040*
4.5	85.201.045	85.216.045*	85.226.045*	85.241.045*
5	85.201.050	85.216.050*	85.226.050*	85.241.050*
5.5	85.201.055	85.216.055*	85.226.055*	85.241.055*
6	85.201.060	85.216.060	85.226.060	85.241.060
6.5	85.201.065	85.216.065	85.226.065	85.241.065
7	85.201.070	85.216.070	85.226.070	85.241.070
7.5	85.201.075	85.216.075	85.226.075	85.241.075
8	85.201.080	85.216.080	85.226.080	85.241.080
8.5	85.201.085	85.216.085	85.226.085	85.241.085
9	85.201.090	85.216.090	85.226.090	85.241.090

* Retail ready packaging available. Add 'BEP' to end of part number.

MEG NOZZLES

MAX PSI: 5,000 • MAX TEMP: 150°C/302°F



ORIFICE	0°	15°	25°	40°
2	85.200.020	85.215.020	85.225.020	85.240.020
2.5	85.200.025	85.215.025	85.225.025	85.240.025
3	85.200.030	85.215.030	85.225.030	85.240.030
3.5	85.200.035	85.215.035	85.225.035	85.240.035
4	85.200.040	85.215.040	85.225.040	85.240.040
4.5	85.200.045	85.215.045	85.225.045	85.240.045
5	85.200.050	85.215.050	85.225.050	85.240.050
5.5	85.200.055	85.215.055	85.225.055	85.240.055
6	85.200.060	85.215.060	85.225.060	85.240.060
6.5	85.200.065	85.215.065	85.225.065	85.240.065
7	85.200.070	85.215.070	85.225.070	85.240.070
7.5	85.200.075	85.215.075	85.225.075	85.240.075
8	85.200.080	85.215.080	85.225.080	85.240.080
8.5	85.200.085	85.215.085	85.225.085	85.240.085
9	85.200.090	85.215.090	85.225.090	85.240.090


QC NOZZLE SETS



PART#	85.210.030BEP	85.210.035BEP	85.210.040BEP	85.210.045BEP
ORIFICE	3	3.5	4	4.5
IN THE BOX	0°, 15°, 40°, Soaper			
MAX PSI	5,000	5,000	5,000	5,000
MAX GPM	3.35	3.91	4.47	5.03
MAX TEMP	100°C / 212°F	100°C / 212°F	100°C / 212°F	100°C / 212°F
INLET SIZE	1/4" QC	1/4" QC	1/4" QC	1/4" QC
RRP ECOM				RRP

RRP / RETAIL READY PRODUCTS

Each 4-piece nozzle set comes in retail ready packaging with bold design, a GPM/PSI chart, and clear use guide for every nozzle.

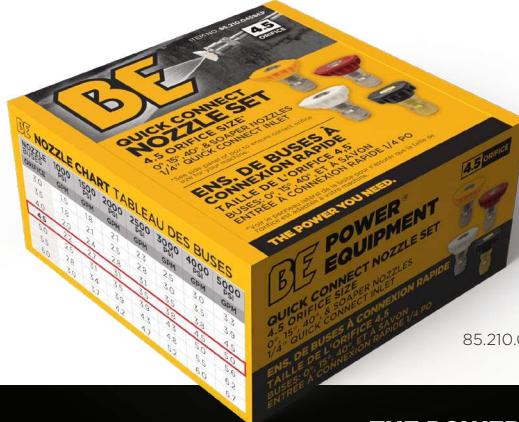

RRP Retail Ready Packaging ECOM Ecom Ready Product

THE POWER YOU NEED.

SOAP NOZZLES



PART#	85.240.300	85.266.400*	85.266.401	85.210.009*
ORIFICE	40	40	40	40
MATERIAL	Brass	Brass	Plastic	Plastic
SPRAY DISTANCE	Standard	Standard	Standard	Long range up to 20'
INLET SIZE	1/4" MEG	1/4" QC	1/4" QC	1/4" QC

RRP

RRP

* Retail ready packaging available. Add 'BEP' to end of part number.



85.266.400

ROTATING TURBO NOZZLES



PART#	RJ-3030-CS	85.210.130	85.210.135*	85.210.140	85.210.145	85.210.150
ORIFICE	3	3	3.5	4	4.5	5
MAX PSI	3,600	3,700	5,000	5,000	5,000	5,000
MAX TEMP	80°C / 175°F	104°C / 220°F				
INLET SIZE	1/4" QC	1/4" QC with Filter				

RRP ECOM

RRP

ECOM

* Retail ready packaging available. Add 'BEP' to end of part number.



RRP / RETAIL READY PRODUCTS

The RJ-3030-CS rotating turbo nozzle is automatically supplied in retail ready packaging.



RRP Retail Ready Packaging **ECOM** Ecom Ready Product

QUICK CONNECT FITTINGS

1/4" FNPT



PART#	85.300.102	85.300.102S	85.300.101	85.300.101S
RRP PART#	85.300.102BEP	85.300.102SBEP	85.300.101BEP	85.300.101SBEP
SIZE & TYPE	1/4" FNPT	1/4" FNPT	1/4" FNPT	1/4" FNPT
MATERIAL	Brass	Stainless Steel	Coated Steel	Stainless Steel
MAX PSI	5,000	6,000	5,000	6,000

3/8" FNPT



PART#	85.300.103	85.300.103S	85.300.104	85.300.104S
RRP PART#	85.300.103BEP	85.300.103SBEP	85.300.104BEP	85.300.104SBEP
SIZE & TYPE	3/8" FNPT	3/8" FNPT	3/8" FNPT	3/8" FNPT
MATERIAL	Brass	Stainless Steel	Coated Steel	Stainless Steel
MAX PSI	5,000	6,000	5,000	6,000

1/4" MNPT



PART#	85.300.107	85.300.107S	85.300.109	85.300.109S
RRP PART#	85.300.107BEP	85.300.107SBEP	85.300.109BEP	85.300.109SBEP
SIZE & TYPE	1/4" MNPT	1/4" MNPT	1/4" MNPT	1/4" MNPT
MATERIAL	Brass	Stainless Steel	Coated Steel	Stainless Steel
MAX PSI	5,000	6,000	5,000	6,000

3/8" MNPT



PART#	85.300.108	85.300.108S	85.300.105	85.300.105S
RRP PART#	85.300.108BEP	85.300.108SBEP	85.300.105BEP	85.300.105SBEP
SIZE & TYPE	3/8" MNPT	3/8" MNPT	3/8" MNPT	3/8" MNPT
MATERIAL	Brass	Stainless Steel	Coated Steel	Stainless Steel
MAX PSI	5,000	6,000	5,000	6,000

QUICK CONNECT FITTING SETS

RRP / RETAIL READY PRODUCTS



PART#	85.400.210	85.400.207
FITTING	MNPT	FNPT
IN THE BOX	1/4" Plug QC Steel, 1/4" Coupler QC Brass, 3/8" Plug QC Steel, 3/8" Coupler QC Brass	1/4" Plug QC Steel, 1/4" Coupler QC Brass, 3/8" Plug QC Steel, 3/8" Coupler QC Brass

RRP ECOM

RRP ECOM

RRP Retail Ready Packaging ECOM Ecom Ready Product

THE POWER YOU NEED.

M22 ADAPTER FITTINGS

FEMALE M22


PART#	85.300.135	85.300.124	85.300.136	85.300.125
RRP PART#	85.300.135BEP	85.300.124BEP	85.300.136BEP	85.300.125BEP

SIZE & TYPE	Female M22 x 1/4" MNPT	Female M22 x 1/4" FNPT	Female M22 x 3/8" MNPT	Female M22 x 3/8" FNPT
-------------	------------------------	------------------------	------------------------	------------------------

MATERIAL	Brass	Brass	Brass	Coated Steel
----------	-------	-------	-------	--------------

FEMALE M22


PART#	85.300.146	85.300.142	85.300.149	85.300.159
RRP PART#	85.300.146BEP	85.300.142BEP	85.300.149BEP	85.300.159BEP

SIZE & TYPE	Female M22 x Female M22 FNPT	Female M22 x 3/8" Plug FNPT	Female M22 (15 mm) x Male M22 (14 mm) FNPT	Female M22 (14 mm) x Male M22 (15 mm) FNPT
-------------	------------------------------	-----------------------------	--	--

MATERIAL	Coated Steel	Coated Steel	Coated Steel	Coated Steel
----------	--------------	--------------	--------------	--------------

MALE M22


PART#	85.300.126	85.300.132	85.300.127
RRP PART#	85.300.126BEP	85.300.132BEP	85.300.127BEP

SIZE & TYPE	Male M22 x 1/4" FNPT	Male M22 x 1/4" MNPT	Male M22 x 3/8" FNPT
-------------	----------------------	----------------------	----------------------

MATERIAL	Brass	Brass	Brass
----------	-------	-------	-------

MALE M22


PART#	85.300.133	85.300.166	85.300.143
RRP PART#	85.300.133BEP	85.300.166BEP	85.300.143BEP

SIZE & TYPE	Male M22 x 3/8" MNPT	Male M22 x Male M22 MNPT	Male M22 x 3/8" Coupler MNPT
-------------	----------------------	--------------------------	------------------------------

MATERIAL	Brass	Brass	Brass
----------	-------	-------	-------

RRP

Retail ready packaging available on all M22 adapter fittings. When ordering with the RRP part numbers, you will receive individually packaged fittings.

SAFETY PRESSURE RELIEF VALVE



PART#	85.300.042
SIZE & TYPE	3/8" MNPT
MATERIAL	Brass
MAX PSI	6,000

PIVOT COUPLER


85.300.172

90° Pivot Coupler
Adjustable high pressure coupler with 3 positions.
Nozzle not included.
4,000 Max PSI



THERMAL VALVES



PART#	85.300.022	85.300.023	85.300.024
-------	------------	------------	------------

SIZE & TYPE	1/4" MNPT	3/8" MNPT	1/2" MNPT
-------------	-----------	-----------	-----------

MAX PSI	2,000	2,000	2,000
---------	-------	-------	-------

PRESSURE GAUGE KIT


85.305.001

2.5" Pressure Gauge Kit
Easy quick connect setup. Installs on outlet of pump to measure system performance.
2.5" Size, 3/8" QC Plug Inlet, 3/8" QC Coupler Outlet

RRP ECOM




bepowerequipment.com/parts

LOOKING FOR A REPLACEMENT PART?

From wheels and pumps to valves and hoses, BE has the parts you need, all available online and easy to find.



FIND THE PARTS YOU NEED

Scan the code or visit bepowerequipment.com/parts to find the right replacement part today.

NEED HELP TO FIND THE RIGHT PART?

CALL: 1.800.663.8331

OUR SALES TEAM WILL FIND WHAT YOU NEED

H1 HOSES



RRP PART#	85.225.229P	85.225.135BEP
NON-RRP PART#	N/A	85.225.135
LENGTH	25'	35'
INTERNAL DIAMETER	1/4"	1/4"
MAX PSI	3,200-3,600	3,600
MAX TEMP	60°C / 140°F	60°C / 140°F
COLOUR	BLACK	BLACK
OUTER COVER	Thermoplastic	Thermoplastic
BRAID	N/A	N/A
CRIMP ENDS	M22 Female x Female	QC
FITTINGS	M22 Female	Steel Coupler x Steel Plug
RESTRICTOR	Bend Restrictors	Bend Restrictors
SHIPPING	3 lbs • 11.75" x 10" x 4"	5 lbs • 10.5" x 10.75" x 3.25"

RRP ECOM

RRP ECOM

H2 HOSE



RRP PART#	85.225.228
NON-RRP PART#	N/A
LENGTH	25'
INTERNAL DIAMETER	1/4"
MAX PSI	4,000
MAX TEMP	100°C / 212°F
COLOUR	BLACK
OUTER COVER	Rubber Wrapped
BRAID	Single Wire Braid
CRIMP ENDS	Swivel x Solid
FITTINGS	Brass Coupler x Steel Plug
RESTRICTOR	Heavy Duty Bend Restrictors
SHIPPING	6 lbs • 12" x 10" x 4"

RRP ECOM

H3 HOSES



85.238.155

RRP PART#	85.238.151	N/A	85.238.156	N/A
NON-RRP PART#	85.238.153	85.238.111	85.238.155	85.238.115
LENGTH	50'	100'	50'	100'
INTERNAL DIAMETER	3/8"	3/8"	3/8"	3/8"
MAX PSI	4,500	4,500	4,500	4,500
MAX TEMP	149°C / 300°F	149°C / 300°F	149°C / 300°F	149°C / 300°F
COLOUR	BLACK	BLACK	GREY	GREY
OUTER COVER	Rubber Wrapped	Rubber Wrapped	Rubber Wrapped	Rubber Wrapped
BRAID	Single Wire Braid	Single Wire Braid	Single Wire Braid	Single Wire Braid
CRIMP ENDS	Swivel x Solid	Swivel x Solid	Swivel x Solid	Swivel x Solid
FITTINGS	Brass Coupler x Steel Plug			
RESTRICTOR	Heavy Duty Bend Restrictors			
SHIPPING	12 lbs • 12" x 13" x 4"	29 lbs • 12" x 13" x 7"	12 lbs • 12" x 13" x 4"	29 lbs • 12" x 13" x 7"

RRP ECOM

RRP ECOM



85.225.135BEP

**RRP / RETAIL READY
PRODUCTS**

RRP Retail Ready Packaging included or available by using the RRP Part#. **ECOM** Ecom Ready Product

H5 HOSES



85.238.215

RRP PART#	N/A	N/A	N/A	N/A
NON-RRP PART#	85.238.251	85.238.211	85.238.255	85.238.215
LENGTH	50'	100'	50'	100'
INTERNAL DIAMETER	3/8"	3/8"	3/8"	3/8"
MAX PSI	6,000	6,000	6,000	6,000
MAX TEMP	154°C / 310°F	154°C / 310°F	154°C / 310°F	154°C / 310°F
COLOUR	BLACK	BLACK	GREY	GREY
OUTER COVER	Rubber Wrapped	Rubber Wrapped	Rubber Wrapped	Rubber Wrapped
BRAID	Double Wire Braid	Double Wire Braid	Double Wire Braid	Double Wire Braid
CRIMP ENDS	Swivel x Solid	Swivel x Solid	Swivel x Solid	Swivel x Solid
FITTINGS	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
RESTRICTOR	Heavy Duty Bend Restrictors			
SHIPPING (WHT & LxWxH)	17 lbs • 12" x 13" x 4"	29 lbs • 12" x 13" x 7"	17 lbs • 12" x 13" x 4"	29 lbs • 12" x 13" x 7"

STANDARD HOSE REELS



PART#	85.402.050	85.402.001	85.402.001K	85.402.002
HOSE SIZE	3/8"	3/8"	3/8"	3/8"
CAPACITY	50'	100'	100'	200'
MAX PSI	5,000	5,000	5,000	5,000
MAX TEMP	71°C / 160°F	71°C / 160°F	71°C / 160°F	71°C / 160°F
INLET SIZE	3/8"	3/8"	3/8"	3/8"
OUTLET SIZE	3/8"	3/8"	3/8"	3/8"
SHIPPING (WHT & LxWxH)	12 lbs • 13" x 12" x 11"	15 lbs • 13" x 18" x 11"	17 lbs • 17" x 18" x 13.5"	21 lbs • 20" x 16" x 17.25"

RRP ECOM

RRP ECOM

- 1 100' HOSE LENGTH CAPACITY
- 2 SIDE LOCKING PIN
- 3 POWDER COATED STEEL TO PREVENT RUSTING
- 4 HAND CRANK FOR EASY AND CONTROLLED REELING
- 5 3/8" NPT FITTINGS
- 6 MOUNTING BRACKET
- 7 WHIP HOSE INCLUDED
- 8 3/8" QUICK CONNECT PLUG



85.402.001K

RRP Retail Ready Packaging ECOM Ecom Ready Product

WHIRL-A-WAY

SURFACE CLEANERS

Scan for full specs and
product comparisons



WORKSHOP
SERIES

85.403.000

DECK SIZE	15"
DECK MATERIAL	ABS Polymer
MIN/MAX PSI	1,500 / 3,500
MIN/MAX GPM	1.4 / 3.0
MAX RPM	2,500
ROTATING ARMS	2
NOZZLES	2 x 25° 015
MAX TEMP	82°C / 180°F
INLET	1/4" QC
SHIPPING	9 lbs • 17" x 17" x 7"
(WHT & LxWxH)	

RRP ECOM




COMMERCIAL
SERIES

85.403.014

DECK SIZE	14"
DECK MATERIAL	ABS Polymer
MIN/MAX PSI	2,500 / 5,000
MIN/MAX GPM	3.0 / 8.0
MAX RPM	2,500
ROTATING ARMS	2
NOZZLES	2 x 25° 015
MAX TEMP	82°C / 180°F
INLET	1/4" QC
SHIPPING	9 lbs • 16" x 16" x 7"
(WHT & LxWxH)	

RRP ECOM

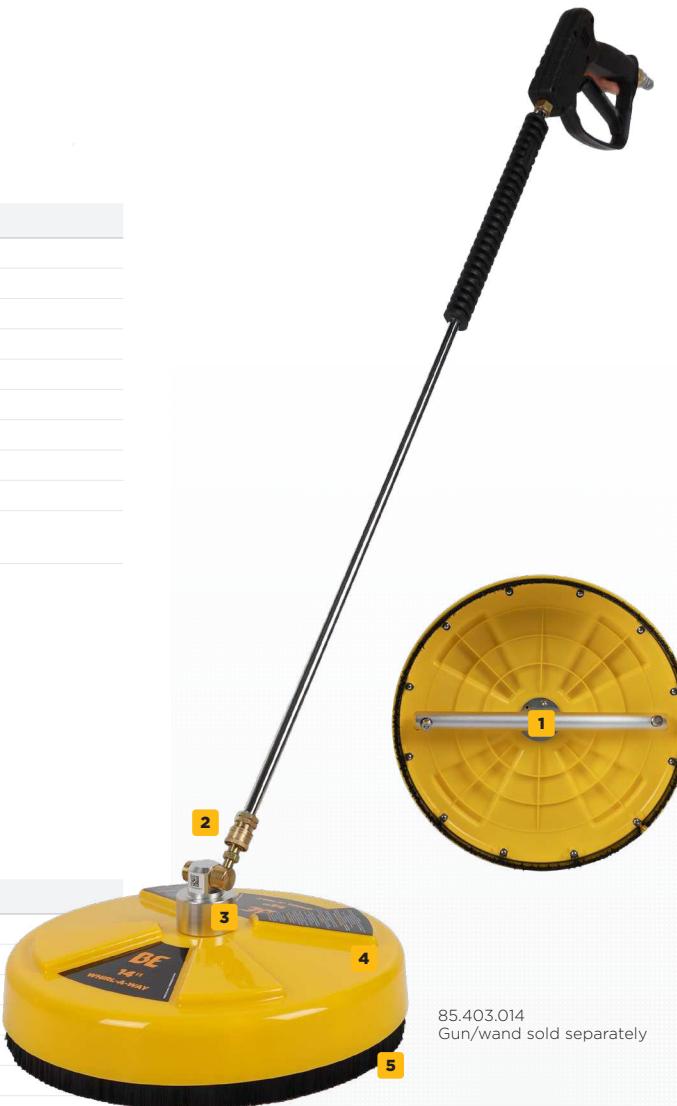

85.403.014
Gun/wand sold separately

- 1** 2 HIGH-PRESSURE ROTATING NOZZLES
- 2** 1/4" QUICK CONNECT INLET
- 3** HEAVY-DUTY ROTARY HEAD (85.403.014)
- 4** ABS POLYMER DECK
- 5** BRISTLE SKIRT CONTAINS SPRAY
AND DEBRIS

RRP Retail Ready Packaging **ECOM** Ecom Ready Product

WHIRL-A-WAY

SURFACE CLEANERS

Scan for full specs and product comparisons



COMMERCIAL

85.403.003

COMMERCIAL

85.403.007

COMMERCIAL

85.403.011

	COMMERCIAL	COMMERCIAL	COMMERCIAL
DECK SIZE	16"	20"	20"
DECK MATERIAL	ABS Polymer	ABS Polymer	ABS Polymer
MIN/MAX PSI	3,000 / 5,000	3,000 / 5,000	3,000 / 5,000
MIN/MAX GPM	4.0 / 8.0	4.0 / 8.0	4.0 / 8.0
MAX RPM	2,500	2,500	2,500
ROTATING ARMS	2	2	2
NOZZLES	2 x 25° 020	2 x 25° 020	2 x 25° 020
MAX TEMP	82°C / 180°F	82°C / 180°F	82°C / 180°F
SHIPPING (WHT & LxWxH)	21 lbs • 33" x 21" x 12"	26 lbs • 33" x 23" x 12"	30 lbs • 33" x 23" x 12"


ECOM

ECOM

ECOM



ROTARY HEAD CUT AWAY



- 1 BUILT-IN SPRAY GUN
- 2 ERGONOMIC HANDLES FOR EASY CONTROL
- 3 2 HIGH-PRESSURE ROTATING NOZZLES
- 4 HEAVY-DUTY ROTARY HEAD
- 5 ABS POLYMER DECK
- 6 4 SWIVEL CASTERS FOR EASY MOVEMENT (85.403.011)
- 7 BRISTLE SKIRT CONTAINS SPRAY AND DEBRIS

ECOM Ecom Ready Product

85.403.007

WHIRL-A-WAY

SURFACE CLEANERS

Scan for full specs and product comparisons



COMMERCIAL SERIES

85.403.009



COMMERCIAL SERIES

85.403.010

DECK SIZE	20"	24"
DECK MATERIAL	Stainless Steel	Stainless Steel
MIN/MAX PSI	3,000 / 5,000	3,000 / 5,000
MIN/MAX GPM	4.0 / 8.0	4.0 / 8.0
MAX RPM	2,500	2,500
ROTATING ARMS	2	3
NOZZLES	2 x 25° 020	3 x 25° 020
MAX TEMP	149°C / 300°F	149°C / 300°F
HIGH TEMP SEALS	Yes	Yes
SHIPPING (WHT & LxWxH)	38 lbs • 33" x 23" x 12"	45 lbs • 33" x 26" x 12"

ECOM

ECOM



INDUSTRIAL SERIES

85.403.032

DECK SIZE	30"
DECK MATERIAL	Stainless Steel
MIN/MAX PSI	3,000 / 5,000
MIN/MAX GPM	6.0 / 8.0
MAX RPM	2,500
ROTATING ARMS	3
NOZZLES	3 x 25° 020
MAX TEMP	149°C / 300°F
HIGH TEMP SEALS	Yes
SHIPPING (WHT & LxWxH)	42 lbs • 33" x 35" x 16"

ECOM Ecom Ready Product



85.403.010

ROTARY HEAD CUT AWAY



- 1 BUILT-IN SPRAY GUN
- 2 ERGONOMIC HANDLES FOR EASY CONTROL
- 3 2 OR 3 HIGH-PRESSURE ROTATING NOZZLES
- 4 HEAVY-DUTY ROTARY HEAD
- 5 STAINLESS STEEL DECK
- 6 4 SWIVEL CASTERS FOR EASY MOVEMENT
- 7 BRISTLE SKIRT CONTAINS SPRAY AND DEBRIS

WATER BROOM SURFACE CLEANERS

Scan for full specs and
product comparisons



	85.400.060	85.400.061
LENGTH	12"	16"
NOZZLES	3 x 065 MEG Nozzles	4 x 065 MEG Nozzles
MAX PSI	5,000	5,000
MIN/MAX GPM	3.0 / 8.0	4.0 / 8.0
INLET	1/4" QC	1/4" QC
SHIPPING (WHT & LxWxH)	3 lbs • 7" x 13" x 3"	4 lbs • 4" x 17" x 7"
RRP ECOM		RRP ECOM



85.400.060

5

- 1 CLEAN LARGE SURFACE AREAS QUICKLY
- 2 1/4" QUICK CONNECT INLET
- 3 ALUMINUM BODY
- 4 3 OR 4 HIGH-PRESSURE NOZZLES
- 5 2 SWIVEL CASTERS FOR EASY MOVEMENT



85.400.062

	85.400.062
LENGTH	16"
NOZZLES	5 x 065 MEG Nozzles
MAX PSI	5,000
MIN/MAX GPM	4.0 / 8.0
INLET	1/4" QC
SHIPPING (WHT & LxWxH)	4 lbs • 4" x 17" x 7"
RRP ECOM	



85.400.062

5

- 1 1/4" QUICK CONNECT INLET
- 2 ALUMINUM BODY
- 3 4 HIGH-PRESSURE NOZZLES ON 90° ELBOWS
- 4 2 SWIVEL CASTERS FOR EASY MOVEMENT
- 5 EASILY CLEANS UNDER VEHICLES



RRP Retail Ready Packaging ECOM Ecom Ready Product

GUTTER CLEANERS



PART#	85.400.033	85.400.007
RRP PART#	N/A	85.400.007BEP
INLET	M22	1/4" QC
OUTLET	QC	QC
MATERIAL	Nickel Plated Steel	Nickel Plated Steel

RRP **ECOM**



85.400.007



BALL VALVE KITS

ENABLES QUICK CHANGEOVER FROM WHIRL-A-WAY TO WAND WITH NO NEED TO STOP THE UNIT.



PART#	85.300.044	85.300.046S	85.300.046
MAX PSI	5,000	7,250	5,000
INLET	3/8" QC	3/8" FNPT	3/8" FNPT
OUTLET	3/8" QC	3/8" FNPT	3/8" FNPT
MAX TEMP	82°C / 180°F	82°C / 180°F	82°C / 180°F
FEATURES	With seal & viton ring	Full port stainless steel ball valve with delrin seals	Full port steel ball valve with delrin seals



85.300.046



SWITCH TOOLS FAST

Easily alternate between Whirl-A-Way and wand while the unit keeps running.



RRP Retail Ready Packaging using the RRP Part#. **ECOM** Ecom Ready Product

HIGH TEMPERATURE SHUT-OFF GUNS



PART#	85.202.109	85.202.068	85.202.020
RRP PART#	85.202.109BEP	N/A	N/A
MAX PSI	5,000	4,500	5,000
MAX GPM	10.0	10.0	12.0
INLET	3/8" FNPT	3/8" FNPT	3/8" FNPT
OUTLET	1/4" FNPT	1/4" FNPT	1/4" FNPT
MAX TEMP	160°C / 320°F	160°C / 320°F	149°C / 300°F
FEATURES	Industry standard rated for the highest temperature, well suited for all pressure washing applications.	Weep gun, ideal for car washes because of constant weep action to prevent freeze up.	Suttner ST-2605 anti-fatigue easy pull trigger, for commercial cleaners allowing for longer work periods.

RRP ECOM



85.202.109

1 BRASS 1/4" FNPT OUTLET

2 COMFORTABLE HANDLE MADE FROM DURABLE PLASTIC

3 LEVER LOCK TO PREVENT THE GUN FROM SPRAYING

4 BRASS 3/8" FNPT INLET



TELESCOPING WAND & WHIRL-A-WAY GUNS




PART#	85.202.127	85.202.114
MAX PSI	5,000	5,000
MAX GPM	10.0	10.0
INLET	3/8" FNPT	3/8" FNPT
OUTLET	1/4" FNPT	1/4" FNPT
MAX TEMP	149°C / 300°F	121°C / 250°F
FEATURES	Replacement trigger-gun assembly for all current models of telescoping wands. Can also be used with 3rd generation telescoping wands.	Replacement trigger-gun assembly for all current models of Whirl-A-Way surface cleaners.



RRP Retail Ready Packaging using the RRP Part#. **ECOM** Ecom Ready Product

GUN & WAND ASSEMBLIES

COMMERCIAL ONE-PIECE GUN & WAND

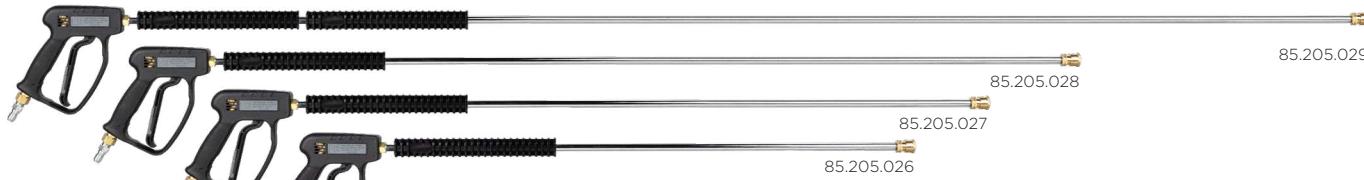

PART#	85.205.026	85.205.027	85.205.028	85.205.029
LENGTH	36"	47"	59"	79"
MAX PSI	5,000	5,000	5,000	5,000
MAX GPM	10.0	10.0	10.0	10.0
INLET	3/8" QC Plug	3/8" QC Plug	3/8" QC Plug	3/8" QC Plug
OUTLET	1/4" QC Coupler	1/4" QC Coupler	1/4" QC Coupler	1/4" QC Coupler
MAX TEMP	160°C / 320°F	160°C / 320°F	160°C / 320°F	160°C / 320°F

RRP ECOM



85.205.026

TWO-PIECE GUN & WAND

PART#	85.205.050
LENGTH	36"
MAX PSI	3,800
MAX GPM	8.0
INLET	3/8" QC Plug / M22
OUTLET	1/4" QC Coupler
MAX TEMP	60°C / 140°F

RRP ECOM



85.205.050

PRESSURE WASHER ACCESSORY KIT

Universal fit pressure washer accessory kit including 3,000 PSI gun/wand with variable nozzle, 25' thermoplastic hose, and foam cannon with soap bottle.

PART#	85.400.320
MAX PSI	3,000
MAX GPM	5.5
MAX TEMP	60°C / 140°F
GUN/WAND	Insulated lance handle with steel pipe
NOZZLE	Variable nozzle adjustable from 0° to 45°
HOSE	25' thermoplastic hose with M22 fittings and bend restrictors
FITTINGS	M22F (15mm) x M22M (14mm) coupler to go from the pump to the hose
FOAM CANNON	Foam cannon with soap bottle

RRP ECOM



85.400.320

1 WAND WITH VARIABLE NOZZLE

2 25' THERMOPLASTIC HOSE WITH M22 FITTINGS AND BEND RESTRICTORS

3 INSULATED SPRAY GUN IDEAL FOR PRESSURE WASHERS UP TO 3,000 PSI

4 FOAM CANNON WITH SOAP BOTTLE

RRP Retail Ready Packaging ECOM Ecom Ready Product

COMMERCIAL GUN & DUAL WAND




PART#	85.205.090
LENGTH	47"
MAX PSI	5,000
MAX GPM	10.0
INLET	3/8" QC Plug
OUTLET	1/4" QC Coupler
MAX TEMP	160°C / 320°F

COMMERCIAL WEEP GUN & FLEXIBLE WAND



PART#	85.205.081
LENGTH	18"
MAX PSI	3,000
MAX GPM	8.0
INLET	3/8" QC Plug
OUTLET	1/4" QC Coupler
MAX TEMP	93°C / 200°F

TELESCOPING WANDS

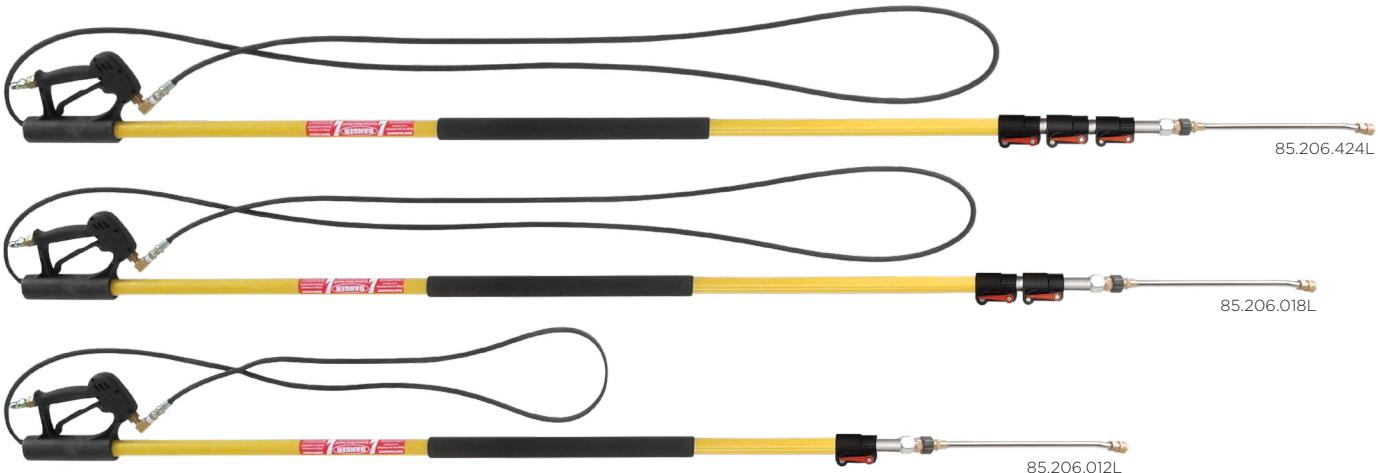

PART#	85.206.012L	85.206.018L	85.206.424L
POLE STAGES	2	3	4
MAX LENGTH	12'	18'	24'
COLLAPSED LENGTH	7'	7.5'	8'
MAX PSI	5,000	5,000	5,000
MAX GPM	8.0	8.0	8.0
MAX TEMP	93°C / 200°F	93°C / 200°F	93°C / 200°F
SHIPPING (WHT & LxWxH)	12 lbs • 79" x 8" x 3"	14 lbs • 79" x 8" x 3"	16 lbs • 79" x 8" x 3"

ECOM

ECOM

TELESCOPING WAND BELT KIT

Reduces strain and improves comfort when using a telescoping wand.

PART# 85.400.019

RRP

RRP Retail Ready Packaging **ECOM** Ecom Ready Product



SEWER JETTER

COMPONENTS TO CONVERT COLD WATER GAS PRESSURE WASHERS TO A SEWER JETTER SYSTEM

See setup tutorial on page 149

1

PRESSURE WASHER HOSE CONNECTOR



Male Quick Connect x 3/8 MNPT Plug
85.300.105

2

BALL VALVE



Full Port Stainless Steel Ball Valve with Delrin Seals
85.300.046S

3

REDUCER BUSHING



3/8" MNPT x 1/8" FNPT Reducer Bushing
85.708.008

4

SEWER JETTER HOSE



50' x 3/16" Nylon Braided Sewer Jetter Hose
85.236.050

5

CLEANING NOZZLE



045 1/8" FNPT Drain Cleaning Laser Nozzle
85.210.146



055 1/8" FNPT Rotating Nozzle
85.210.158NPT



Full Port Steel Ball Valve with Delrin Seals
85.300.046



100' x 3/16" Nylon Braided Sewer Jetter Hose
85.236.100



150' x 3/16" Nylon Braided Sewer Jetter Hose
85.236.150



045 1/4" FNPT Drain Cleaning Laser Nozzle
85.210.248



065 1/8" FNPT Drain Cleaning Laser Nozzle
85.210.156



065 1/4" FNPT Drain Cleaning Laser Nozzle
85.210.258

HOSE REEL SET UP



SEWER JETTER SETUP

1



1. INSTALL PLUG

- Screw the QC x 3/8" MNPT plug into the steel ball valve.

2



3



2. ADD REDUCER

- Thread the reducer bushing into the other side of the ball valve.

4



4. CHECK ASSEMBLY

- Order should be: QC plug > ball valve > reducer bushing > jetter hose.

3. ATTACH HOSE

- Connect the sewer jetter hose to the reducer bushing.

5



5. CONNECT TO PUMP OR HOSE

- Attach assembly to the quick-connect outlet on the pressure washer pump or the pressure washer hose.

6



6. CHOOSE NOZZLE

- Select the nozzle type from below that suits your application.

Option 1



LASER NOZZLE

- One front jet and three rear jets cut through clogs and flush pipes.
PSI: 4,000 • Temp: 149°C / 300°F

Option 2



ROTATING NOZZLE

- Rotating rear jets drive the nozzle forward while clearing debris.
PSI: 3,650 • Temp: 99°C / 210°F

SANDBLAST KIT

COMPONENTS TO CONVERT COLD WATER GAS PRESSURE WASHERS TO A SANDBLAST SYSTEM

PART#	9001-9
NOZZLE	1/4" MNPT Tungsten Carbide 0° MEG Nozzle with 4.0 Orifice
HOSE	25ft x 3/4" Diameter Plastic Hose
PROBE	21.5" Brass Probe
MIN / MAX GPM	3.5 / 8.0



Scan to watch the sandblast kit set up video



SANDBLAST SETUP



1. ATTACH PICKUP TUBE

- Insert the flat end of the pipe into the hose and secure with the gear clamp where the hose and pipe intersect.



2. PLACE IN SAND BAG

- Use fine grain sand (20 grit)
- Cut a small hole in the bag and insert the pointed pipe end. Place bag and pipe away from work area to keep dry.



3. CONNECT NOZZLE

- Attach the sandblast nozzle to the quick-connect lance.



4. ADJUST MEDIA FLOW

- Turn the dial to set sand-to-water ratio. Left for more sand, right for less sand.



5. CONNECT WATER SUPPLY

- Hook up water source to your pressure washer inlet, hold trigger, and flush line with water for a few seconds.



7. BEGIN SANDBLASTING

- Start pressure washer and blast. Always test on scrap material first.

COUPLER O-RINGS



PART#	85.309.102C	85.309.102VC	85.309.103C	85.309.103VC	85.309.124
SIZE	1/4"	1/4"	3/8"	3/8"	2.6 mm
MATERIAL	EPDM	Viton	EPDM	Viton	EPDM
TEMP RATING	Cold Water	Hot Water	Cold Water	Hot Water	Cold Water
FITTING	QC	QC	QC	QC	M22
BOX QUANTITY	100	100	100	100	1

GARDEN HOSE ATTACHMENTS



FILTER WASHER

PART#	85.308.120
SIZE	1"
FILTER	Stainless Steel #60 Mesh



3/8" EZ ADAPTER GARDEN HOSE HEX

PART#	85.300.121
INLET	3/4" FGHT
OUTLET	3/8" MNPT
FILTER	Stainless Steel #60 Mesh
MATERIAL	Brass



1/2" EZ ADAPTER GARDEN HOSE HEX

PART#	85.300.122
INLET	3/4" FGHT
OUTLET	1/2" MNPT
FILTER	Stainless Steel #60 Mesh
MATERIAL	Brass



ADAPTER

PART#	85.300.130
INLET	1/2" FNPT
OUTLET	3/4" MGHT
MATERIAL	Brass



GARDEN HOSE TO 1/2" PLUG

PART#	85.300.137
FITTINGS	3/4" MGHT x 1/2" Plug



1/2" FEMALE COUPLER TO GARDEN HOSE

PART#	85.300.138
FITTINGS	3/4" FGHT x 1/2" Coupler



WATER INLET FILTER

PART#	85.300.056
INLET	3/4" FGHT
OUTLET	1/2" MNPT
PORT	2 x 1/4" FNPT
MAX GPM	8.0
FILTER	Stainless Steel #60 Mesh
MATERIAL	Brass



GARDEN HOSE SHUT-OFF VALVE

PART#	91.900.073
INLET	3/4" FGHT
OUTLET	2 x 3/4" MGHT
MAX PSI	100
MATERIAL	Brass

WARRANTY STATEMENT

BE Power Equipment Inc. warrants to the original retail purchaser that our new products are free from defects in material and workmanship for the timeframes set forth. If a defect is found in a BE Power Equipment product within the limitations outlined in this warranty statement, BE Power Equipment, at its sole discretion, will repair, replace, or credit the product.

The warranty coverage begins on the date of the retail purchase by the end-user. Valid proof of purchase must be presented with the warranty claim.

This warranty is limited to defects that occurred during regular operational use. It does not cover failures due to lack of maintenance, negligence, abuse, misuse, including, but not limited to, freezing damage, alterations, chemical deterioration, scale buildup, rust, thermal shock, thermal expansion, transportation damage, oil changes, valve adjustments, fuel system maintenance, or the use of incorrect parts. Furthermore, using the wrong fuel, water, or power supply is considered a form of misuse.

This warranty does not cover normal wearing items such as O-rings, valves, seals, filters, spark plugs, or packings. These are normal wearing items and should be factored into your regular maintenance schedule.

The warranty herein is in lieu of all other warranties, express or implied, including any implied warranty of fitness for a particular purpose. BE Power Equipment does not authorize any of its dealers, service centers, agents, employees, or any other party to expand, extend, or modify the scope of this warranty in any manner on behalf of BE Power Equipment.

BE Power Equipment expressly disclaims liability for injuries to persons or property, or for incidental damages, rental loss, time loss, transportation costs, or consequential damages. It is the buyer's responsibility to ensure the correct installation, application, and use of the product purchased.

HONDA ENGINE WARRANTY

Honda requires their warranty claims to be evaluated and processed at their respective authorized service centers. Locations can be found on their respective website.

REGISTERED PRODUCT EXTENDED WARRANTY

BE offers an extended warranty on its products upon registration on the website. To qualify for the extended warranty, products must be registered within 90 days of purchase. This extended warranty does not apply to Honda engines; it is your responsibility to follow and adhere to the Honda warranty processes and procedures. BE retains sole discretion in determining whether the failure results from a manufacturing defect or workmanship and is the cause of premature failure.

PRODUCT REGISTRATION

Scan the code to register products.



WARRANTY CLAIM PROCEDURE

Contact the BE Technical Service department at 1-866-850-6666 or email us at servicecenter@bepressure.com with the following information:

- Model/part number
- Serial number (if applicable)
- Copy of the original purchase receipt
- Detailed description of the failure
- Any additional relevant details or photos pertinent to the situation

AUTHORIZED BE SERVICE CENTERS

Scan the code to find an authorized BE service center.



WARRANTY TIMELINES

CATEGORY	PRODUCT/SERIES	STANDARD WARRANTY	REGISTERED EXTENDED WARRANTY
Engines and Motors	Honda GX	3 Years Through Honda	N/A
	Vanguard	3 Years	5 Years
	Powerease Gas Engines	3 Years	5 Years
	Powerease Electric Motors	1 Year	5 Years
	Baldor Electric Motors	3 Years	5 Years
Pressure Washers	Techtop Electric Motors	3 Years	5 Years
	Workshop Series	1 Year	5 Years
Inverter and Generators	Commercial Series	3 Years	5 Years **Excluding Honda Engines
	Industrial Series	3 Years	5 Years **Excluding Honda Engines
Water/Chemical/Trash Pumps	All Units	3 Years	5 Years
Accessories	All Accessories	1 Year	N/A

WARNING – LIMITATION OF LIABILITY

Use of this equipment is at the operator's sole risk.

BE Power Equipment shall not be held responsible for any **personal injury, property damage, or economic loss** resulting from:

- Improper use or maintenance
- Unauthorized modifications
- Failure to follow safety instructions or operating guidelines
- Use of the product beyond intended or specified purposes

In the event of equipment failure or manufacturer defect, BE Power Equipment's liability is strictly limited to **repair or replacement** of the product under warranty, if applicable. In no case shall BE Power Equipment, its distributors, or affiliates be liable for **incidental, indirect, or consequential damages** of any kind, to the extent permitted by law.

ALWAYS read and follow all safety instructions and manuals before operation. Improper use can result in serious injury or damage.

By using this product, you accept these terms.

FREIGHT POLICIES

Canada Customers

- Please contact your sales representative for details on freight policies specific to your shipping zone.

USA Customers

- All courier packages will be shipped via UPS or FEDEX.
- If prepaid levels are not met, orders will then be shipped via prepaid and charge.
- The total order weight cannot exceed 100 lbs - actual or cubed weight.
- Maximum weight per box cannot exceed 50 lbs (orders may be shipped in multiple boxes).
- A \$25 fee applies on residential deliveries.
- Courier-able items are at the discretion of BE Power Equipment, ie. hose, long wands, batteries, fluids, etc.
- All equipment is not courier-able due to potential freight damage.

Courier Shipment Back Order Policy

- Prepaid courier shipments that have back ordered items will be shipped via prepaid and charge as soon as the items are available.

LTL Shipment Policy

- All LTL shipments will be shipped via "Best way" based on geographical location of delivery.
- If prepaid levels are not met, orders will then be shipped via prepaid and charge.
- LTL shipments start at any items on a pallet.
- An additional fee applies on residential deliveries.
- An additional fee applies to power tailgate use.
- An additional fee applies on attempted deliveries where it is required to reschedule.
- An additional fee applies for delivery appointments.
- Fees may be billed after initial invoice.

LTL Shipment Back Order Policy

- LTL shipments that have back ordered items will be shipped via prepaid and charge as soon as the items are available unless original shipment qualified for prepaid (free) shipping.

SHIPPING CLAIMS PROCEDURE

1. Freight Damage - is defined by product arriving with observable damage to package and/or product.
 - 1.1 Freight damages MUST be reported within 48 hours of receipt.
 - 1.2 Damaged packaging must be photographed immediately for records.
 - 1.3 If freight company is arranged by dealer, then it is incumbent on them to contact their own freight company and file a claim directly with them.
 - 1.4 If freight was arranged by BE Power Equipment Inc., then contact BE Power Equipment Inc. with the following information (regardless of receipt or refusal of shipment).
 - 1.4.1 Purchase order of product
 - 1.4.2 Pictures of damage
 - 1.4.3 List of products effected
 - 1.4.4 Model Number of product
 - 1.4.5 Serial Number of product
2. Hidden Damage - is defined by product arriving and the package having no visible signs of damage. Upon opening the packing damage is noted on the product.
 - 2.1 Hidden damage MUST be reported within 48 hours of noticing the damage.
 - 2.2 Hidden damage claims cannot be reported on items received more than 6 months prior.
 - 2.3 When hidden damage is discovered, contact BE Power Equipment Inc. with the following information.
 - 2.3.1 Purchase order of product
 - 2.3.2 Pictures of damage
 - 2.3.3 Model number of product
 - 2.3.4 Serial number of product

BE Power Equipment Inc. will advise on course of action to remedy situation.

BE GROUP

ABBOTSFORD, BC
MANUFACTURING FACILITY

PORTLAND, OR
DISTRIBUTION CENTRE

FORT MOHAVE, AZ
DISTRIBUTION CENTRE

WEST PALM BEACH, FL
DISTRIBUTION CENTRE

LONDON, ON
DISTRIBUTION CENTRE

SENECA, PA
DISTRIBUTION CENTRE

SHAKOPEE, MN
MANUFACTURING FACILITY

DECATURVILLE, TN
MANUFACTURING FACILITY



ABBOTSFORD, BC

BE Head Office and Manufacturing Facility



Canby, OR
Distribution
Centre



Shakopee, MN
Manufacturing
Facility



Seneca, PA
Distribution
Centre



Decaturville, TN
Manufacturing
Facility



**West Palm
Beach, FL**
Distribution
Centre



London, ON
Distribution
Centre



Shanghai, China
Manufacturing
Facility



**Sydney,
Australia**
Distribution
Centre

SALES TOLL FREE:
1.800.663.8331



BE POWER®
EQUIPMENT

BRABER®



Baren®

SprintBett



Largo
CLEANING SYSTEMS

BENZ

BAR



CENTURION PUMP



**UNMATCHED PERFORMANCE.
UNRIValed QUALITY.**



SEE CP PUMPS
FROM PAGE:
112