




Structure
Glass
Solutions

FRAMELESS SHOWER DOOR HARDWARE • GLASS MACHINERY • SLIDING SYSTEMS

- Frameless Double Bypass
 - Shower Hinges
 - Glass Clamps
- Shower U-Channel
 - Handles
- Barn Door Hardware
 - Header Systems
 - Bottom Sweeps
 - Sliding Systems
- Hydraulic Patch Hinges

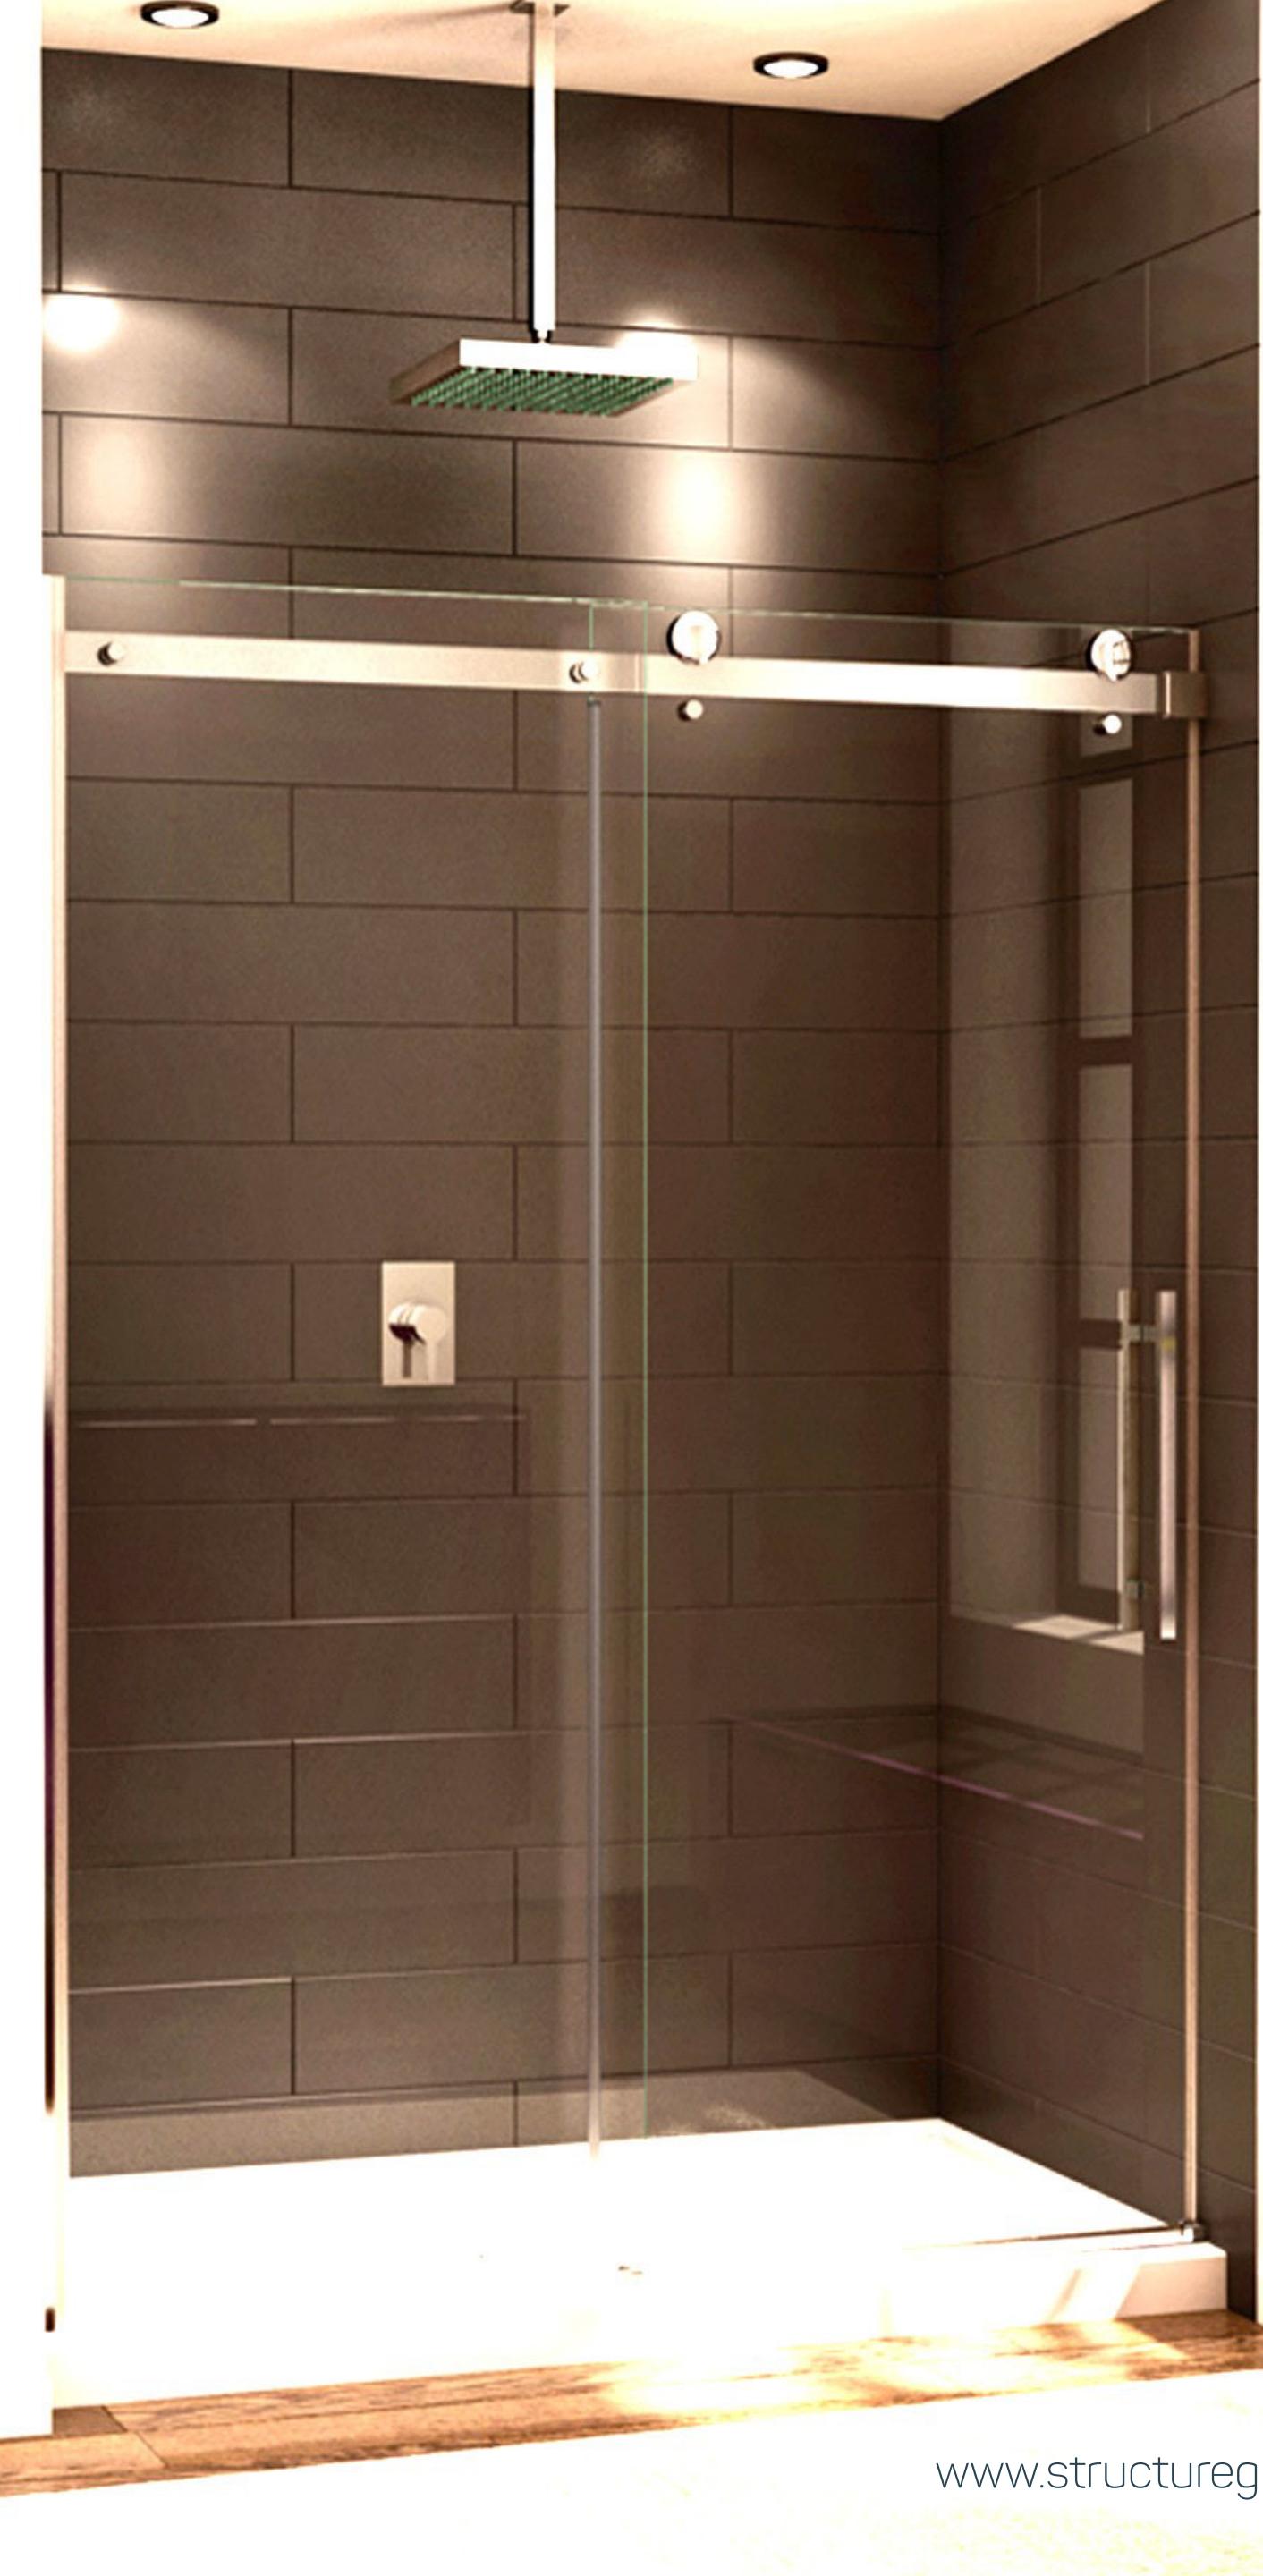

ELEMENT FRAMELESS DOUBLE BYPASS SLIDING SHOWER DOOR SYSTEM



NEW

NEW Matte Black
Finish In Stock!

PRODUCT SPECIFICATION:

- Easy installation
- For 3/8" tempered glass
- Max weight: 220LBS
- Brushed nickel and chrome

Finishes Available

- 73" Stainless steel header track
- Fully frameless double sliding glass design
- Equipped rollers with anti-jumping device
- Adjustable rollers for smooth sliding
- Splash proof threshold to prevent water spillage (minimum threshold depth of 3 3/4 in. (95 mm) required)
- Optional 24" center to center towel bars



Optional Towel Bar

180-degree Streamline Series Sliding System has an entirely different look from traditional sliding systems. The use of minimal hardware provides a frameless look that gives the enclosure an almost floating appearance. Specially designed roller bearings allow for quiet and easy opening and closing of the door. One sliding panel and one fixed panel make the Streamline Series both practical and beautiful.

STREAMLINE SLIDING SHOWER DOOR SYSTEM



STREAMLINE SLIDING SHOWER DOOR SYSTEM

- System features one sliding door and one fixed panel
 - Use monolithic tempered glass
- Specially designed roller bearings for quiet door movement
- Fixed and sliding panels may be reversed for installation
 - Polished or brushed stainless steel finish
- For 5/16" to 3/8" (8 to 10 mm) thick tempered glass (Not included)
- U-Channel or glass clamps for fixed panel must be ordered separately



SK-002



SK-026



SK-027



SK-040



SK-028



MC-001



SK-014



TR-001 78-3/4 (2m) Header

Finishes Available



Chrome




Brushed Nickel



Oil Rubbed Bronze

Optional Accessories

SK-034

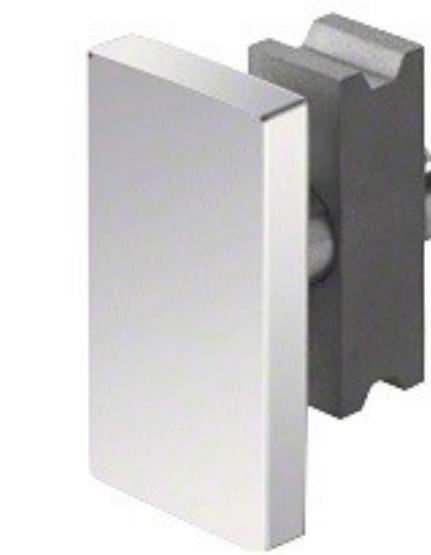

Track Holder Fitting for Wall is used in conjunction with 90-degree Accessory Kit (sold separately)

SK-027



Accessory Kit for 90-degree Return is used in conjunction with Track Holder Fitting for Wall (sold separately)

STREAMLINE PLUS 4 ROLLER SLIDING SHOWER DOOR SYSTEM

- 180-degree Streamline Series Sliding System has an entirely different look from traditional sliding systems. The use of minimal hardware provides a frameless look that gives the enclosure an almost floating appearance.
- Specially designed roller bearings allow for quiet and easy opening and closing of the door.
- One sliding panel and one fixed panel make the Streamline Series both practical and beautiful.

Optional Accessories

SK-034



Finishes Available



Chrome




Brushed Nickel



Oil Rubbed Bronze

Standard 180 Kit includes:

- One 78 3/4 Header Bar **1**
- Four Rollers **2**
- Two Stoppers **3**
- Two track Holder Fittings for Wall **4**
- Two track Holder Fittings for Fixed Panel **5**
- One Thru Glass Pull **6**
- One Bottom Door Guide **7**

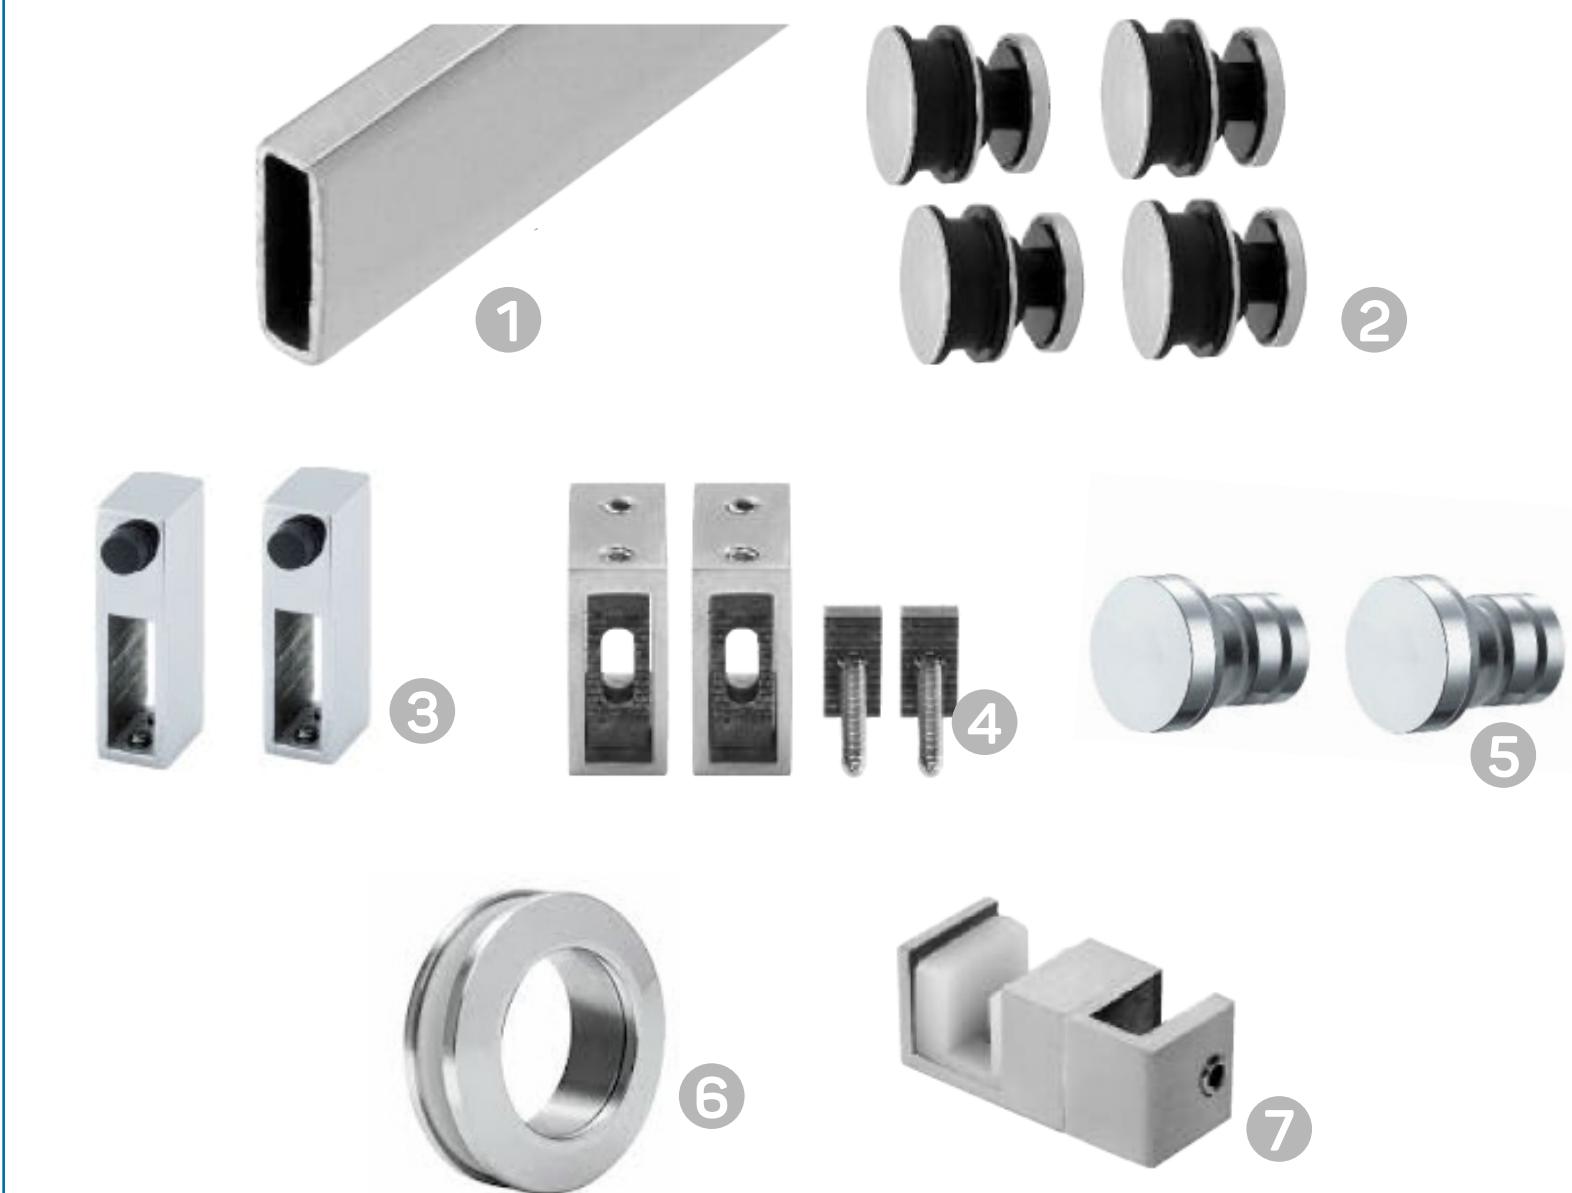

QUATRO OIL RUBBED BRONZE FINISH IN STOCK

NOW AVAILABLE IN HEAVY DUTY AND EXTENDED HEADER VERSION (105")

- SGS Quatro Sliding Shower Door System delivers an exceptionally smooth ride and travel on our 1" diameter heavy-duty stainless steel tube.
- Quatro systems can accommodate 3/8" or 1/2" thick glass. Wall to wall and wall to glass options are available. Standard wall to wall kit includes 4 rollers, 2 fixed panel clamps, 2 tube to wall connectors, 2 stoppers, 1 bottom guide, and 1 78-3/4" Tube Track.



Optional Accessories

90° Tube to Tube

EST-021



2-3/4" Heavy Duty Rollers

SK-002B-070



90° Return Panel Connector

SK-046



Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



STREAMLINE OIL RUBBED BRONZE SLIDING SHOWER DOOR SYSTEM




180-degree Streamline Series Sliding System has an entirely different look from traditional sliding systems. The use of minimal hardware provides a frameless look that gives the enclosure an almost floating appearance.

Specially designed roller bearings allow for quiet and easy opening and closing of the door. One sliding panel and one fixed panel make the Streamline Series both practical and beautiful.



- System Features One Sliding Door and One Fixed Panel
- Use Monolithic Tempered Glass
- Specially Designed Roller Bearings for Quiet Door Movement
- Fixed and Sliding Panels May Be Reversed for Installation
- Polished or Brushed Stainless Steel Finish
- For 5/16" to 3/8" (8 to 10 mm) thick Tempered Glass (Not Included)
- U-Channel or Glass Clamps for Fixed Panel Must Be Ordered Separately

BAYLINE DOUBLE BYPASS SHOWER K.D.

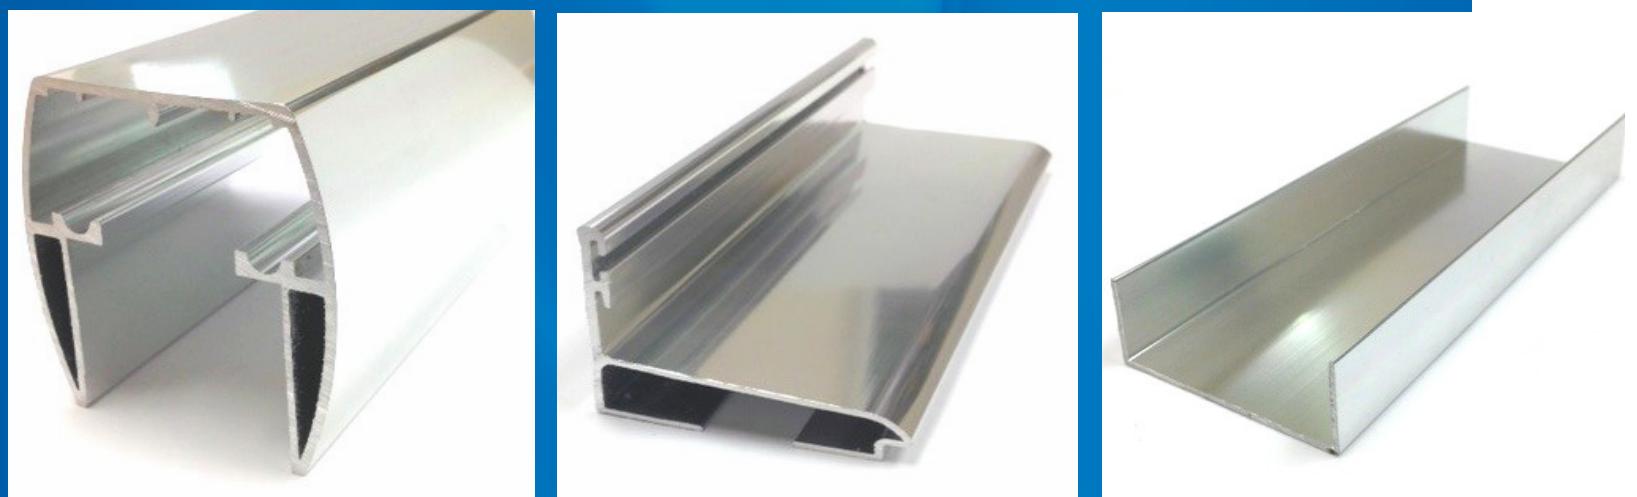

Designed for Use with 1/4" or 3/8" (6 or 10 mm) Glass

- Two popular stock finishes to select from-through-glass, top hangers for immediate installation, with no waiting for silicone to dry
- Double roller top hanger for 3/8" (10 mm) glass
- K.D. kits include two 24" single-sided towel bars with low profile end cap, all necessary aluminum extrusions, nylon rollers, bottom guide, screws, and bumpers (glass not included)
- Towel bars, and top hangers require holes in glass

Finishes Available




Chrome



Brushed Nickel

Stock sizes:

- 60" wide x 72" high
- 72" wide x 80" high

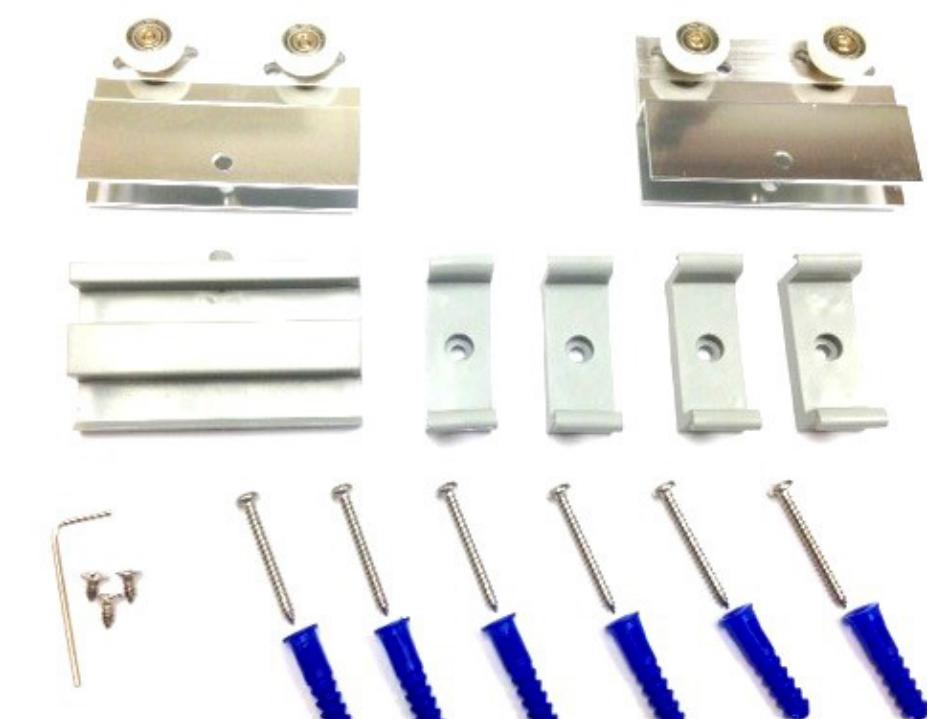

COVERT 144" SERIES SOFT CLOSE DOUBLE DOOR SLIDING W/ DOUBLE FIX PANEL



- Covert interior sliding glass walls are ideal for office fronts, conference rooms, bathroom and bedroom entrances, shower enclosures, etc.
- Glass panels held through high weight capacity pressure clamps with no glass drillings (use of tempered or laminated glass)
- Hydraulic soft-close feature prevents slamming
- Reduces noise
- Protects the glass
- 5-year warranty
- Tested to 100,000 cycles
- Soft closing sliding system for interior partitioning
- Soft closing technology ensures comfortable door operation, and allowing gentle opening and closing without shock or vibration
- Predrilled starter holes on centerline for easy mounting
- Ceiling mountable
- Surface mountable
- Glass mountable

COVERT 144" HEAVY DUTY SERIES SOFT CLOSE SLIDING SYSTEM


MAX WEIGHT- 330LBS!

- Single Door hardware kit
- Double Door hardware kit
- Fixed panel u-channel adapter 72"
- Track to glass adapters
- NEW-3/8" spacer filler 78-3/4" length





- Hydraulic soft-close feature prevents slamming
- Reduces noise
- 5-year warranty
- Tested to 100,000 cycles
- Predrilled starter holes on centerline for easy mounting
- Ceiling mountable
- Surface mountable
- Glass mountable


■ COVERT 144" SERIES SOFT CLOSE SLIDING SYSTEM

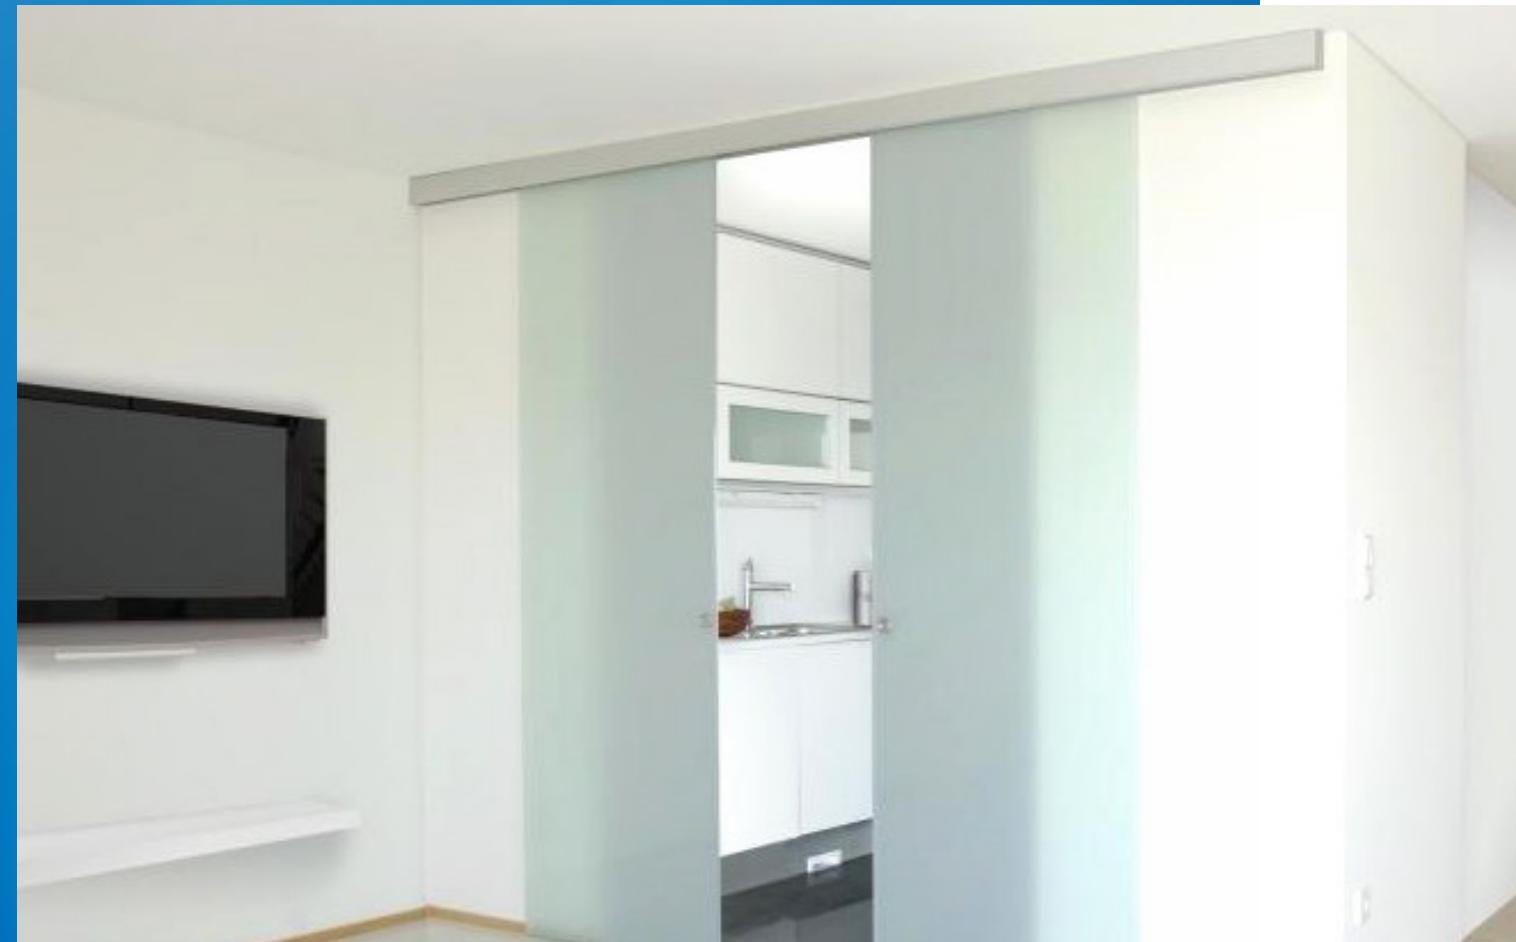

- 180° Surface Application with bi parting doors
- Minimal gap between the doors and the wall to enhance aesthetic and acoustical features
- Use of 3/8" and 1/2" glass doors

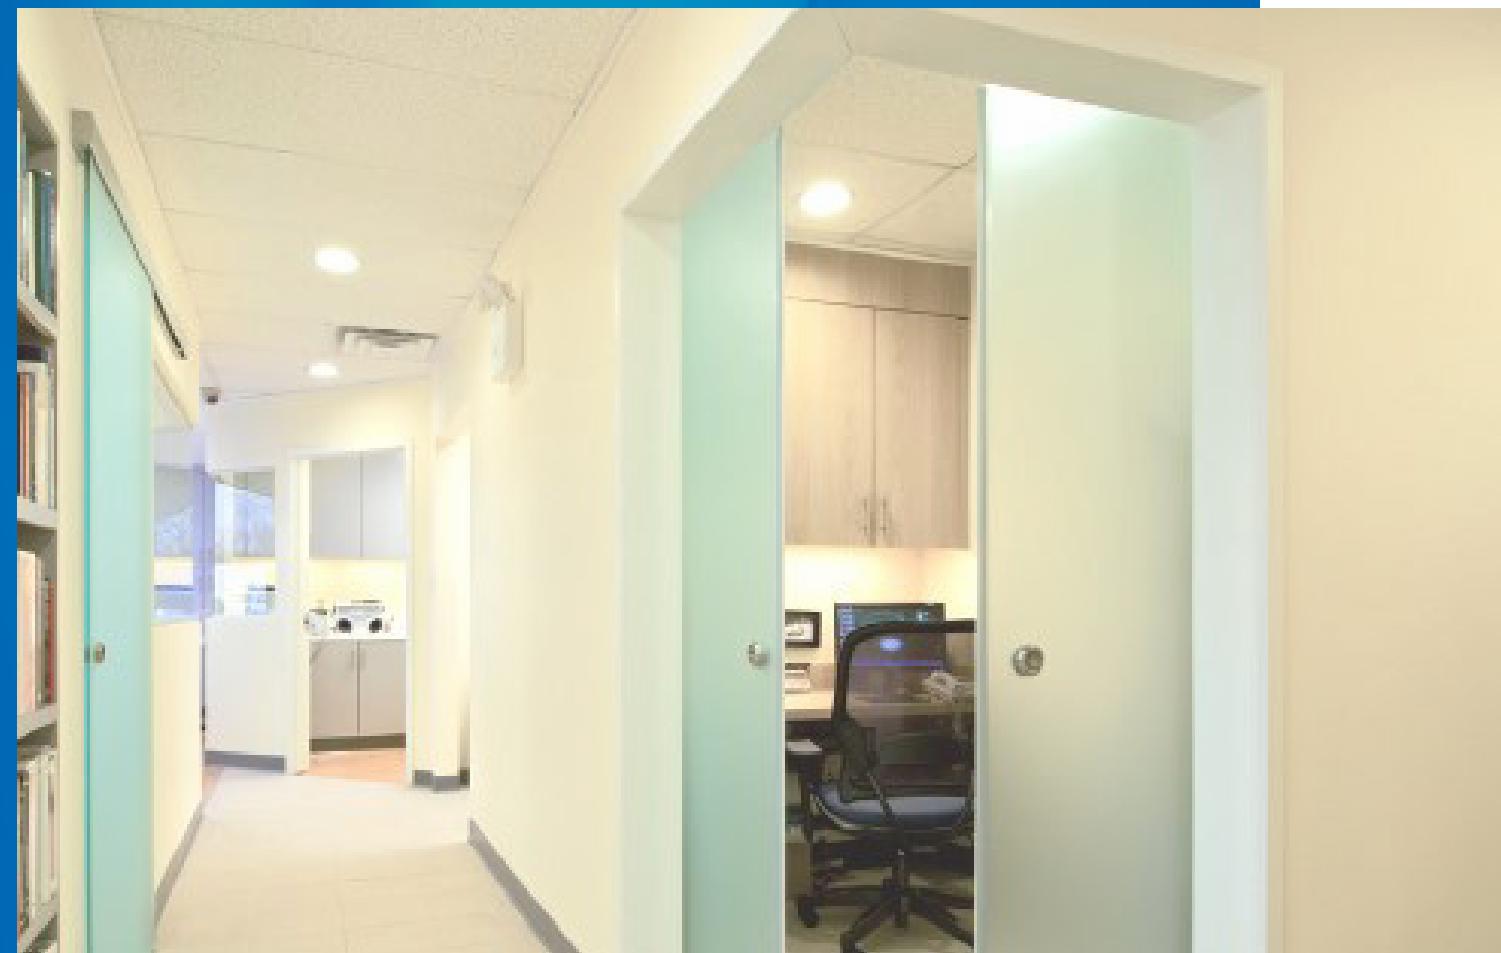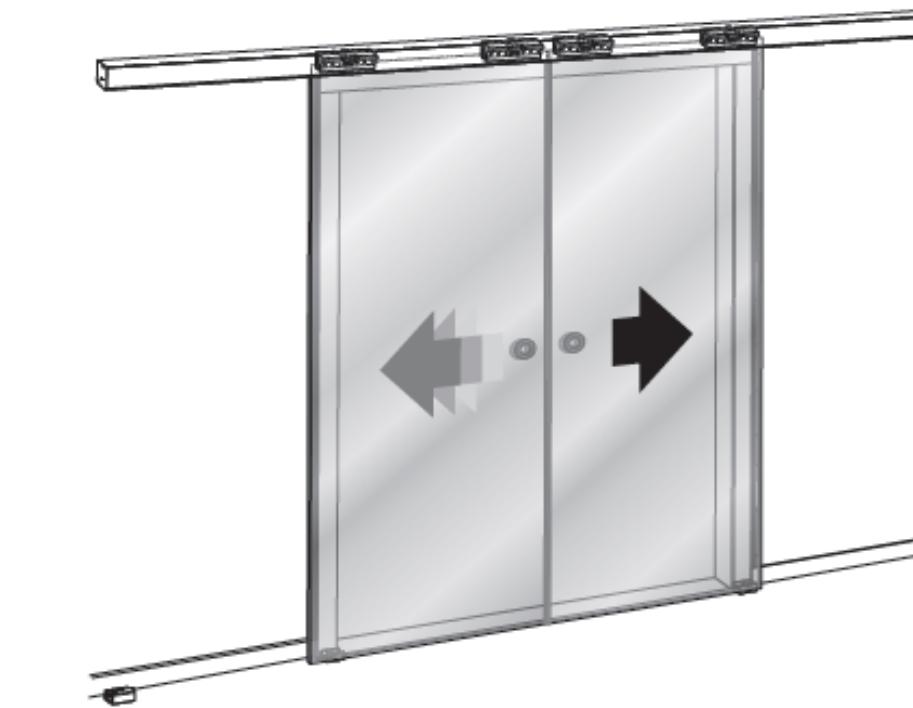


- 90° Corner Unit application with bi parting doors
- Ideal for offices partitions, conference rooms, bedrooms entrances, lounges, etc. Minimalist design with a compact Header track holding panels up to 10" high
- Minimal gap between the doors and the wall to enhance aesthetic and acoustical features
- Use of 3/8" and 1/2" glass doors up to 330lbs


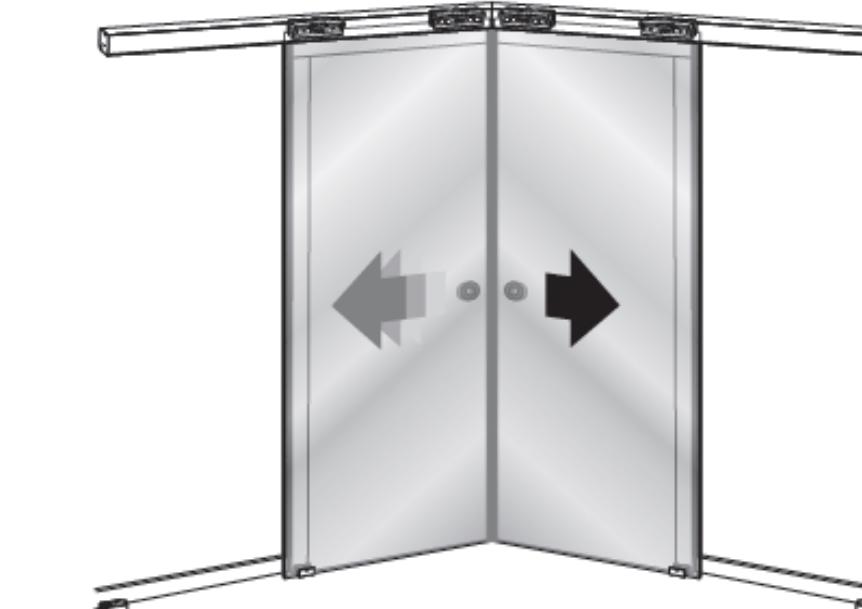


COVERT 144" SERIES SOFT CLOSE SLIDING SYSTEM APPLICATIONS


Single Glass Door Surface Mount

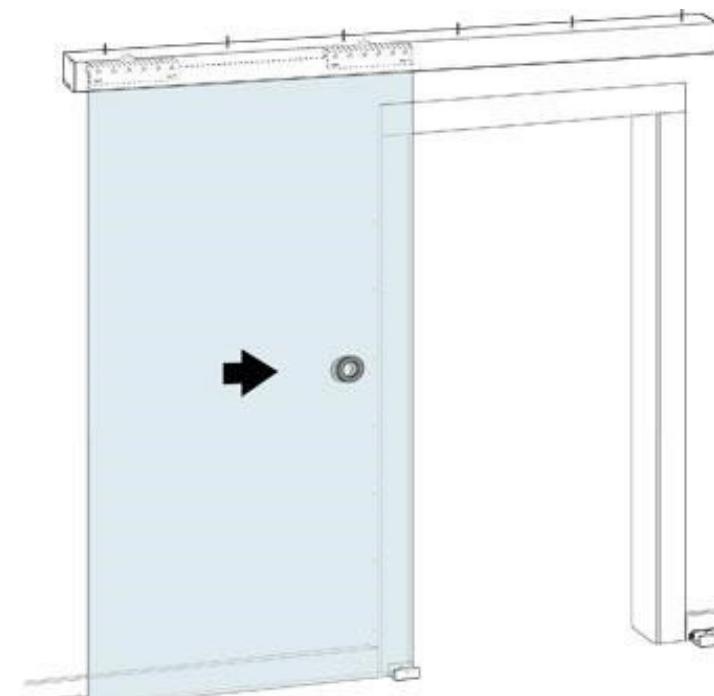


Single Glass Door Pocket Mount

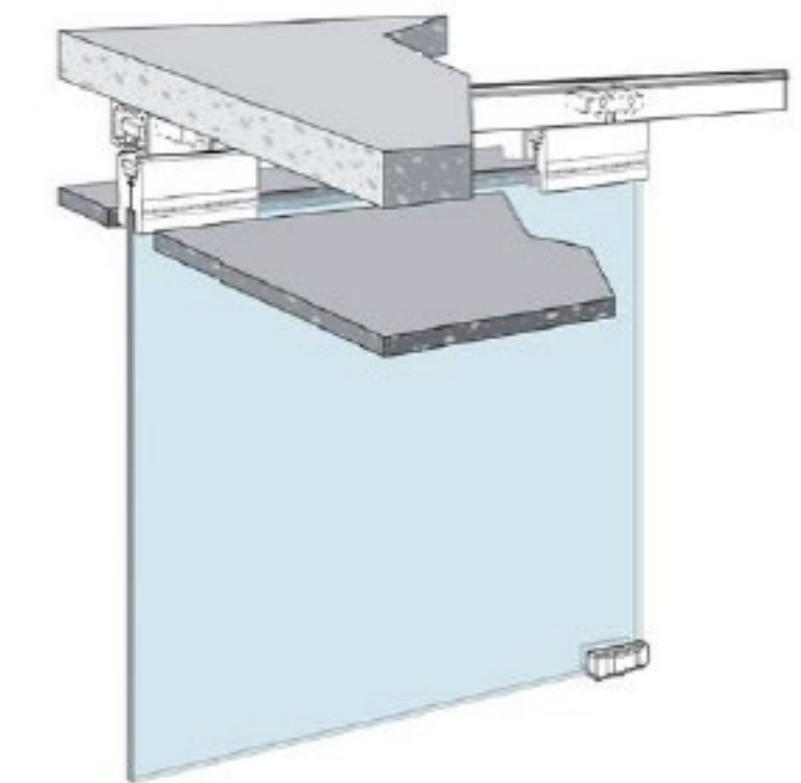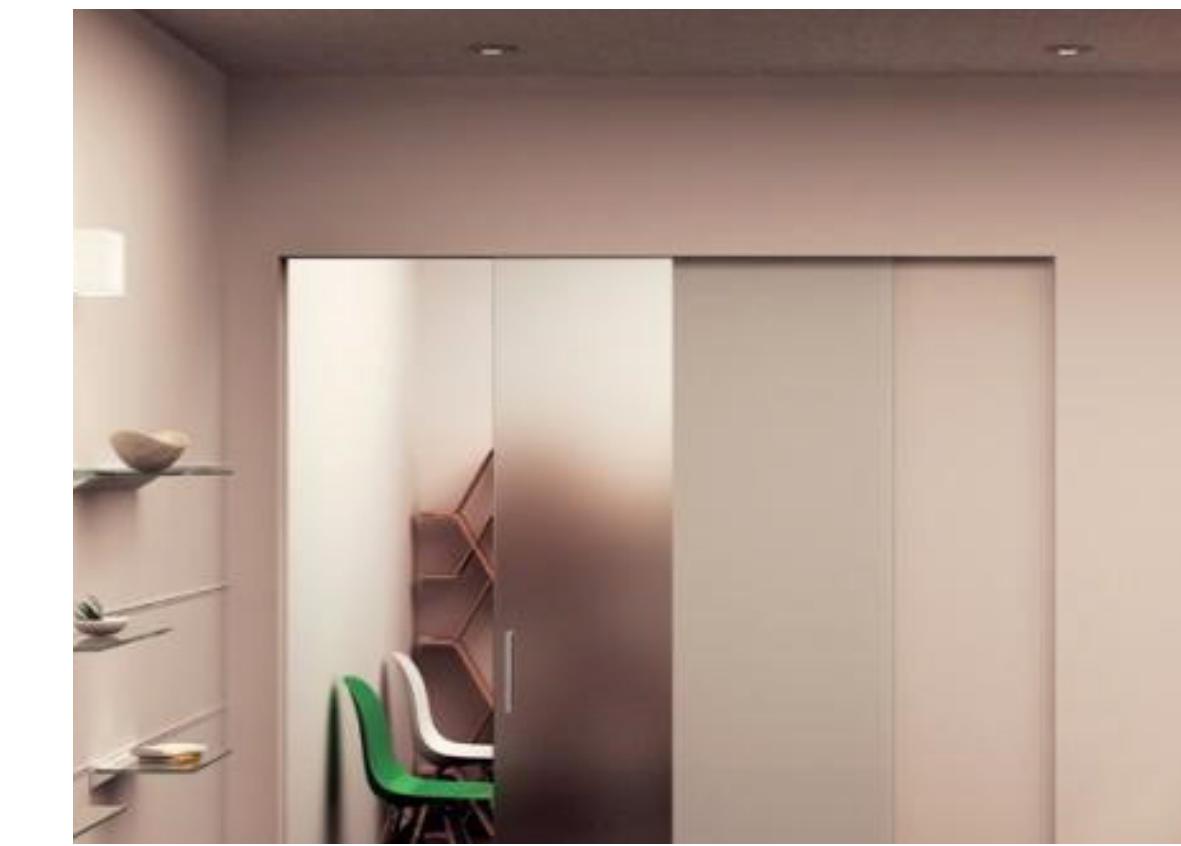

Single Glass Door Transom Mount

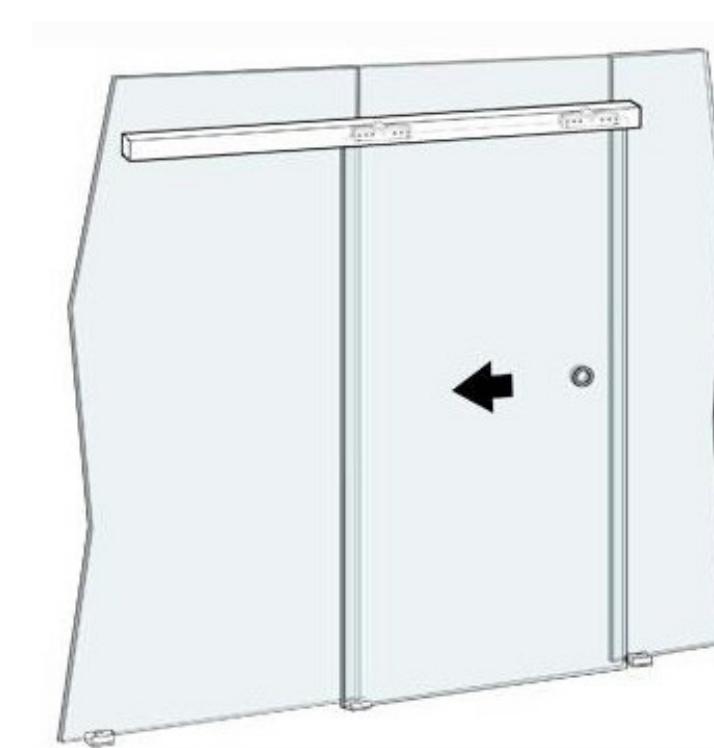


Single Sliding Glass W/ Fixed Panel


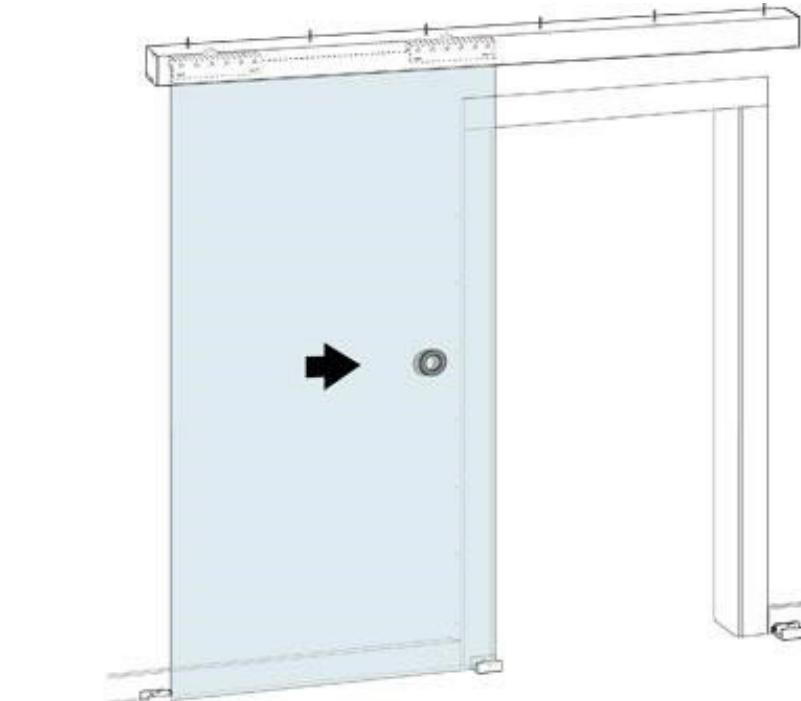


COVERT 144" SERIES SOFT CLOSE SLIDING SYSTEM APPLICATIONS


2 Fixed Glass Panels and 1 Sliding Glass Door

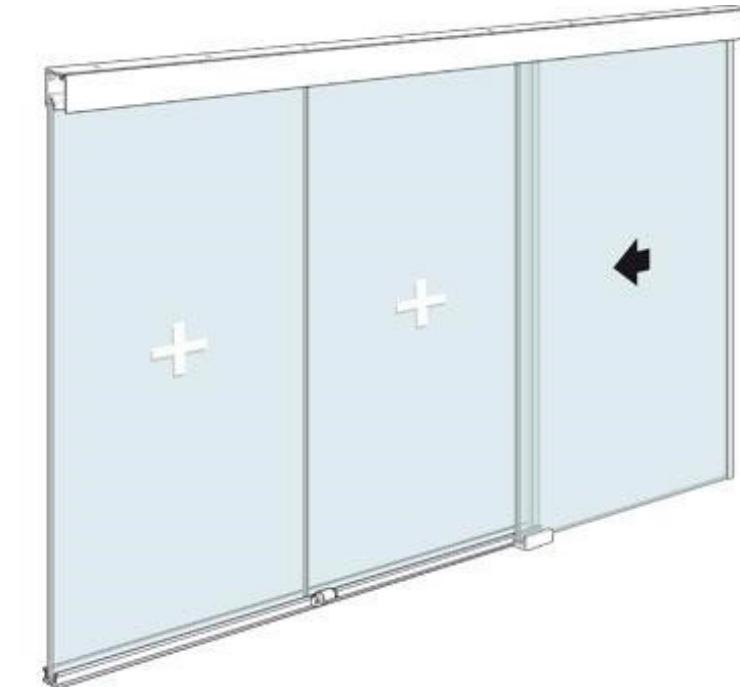



2 Fixed Glass Panels and 1 Sliding Glass Door Center

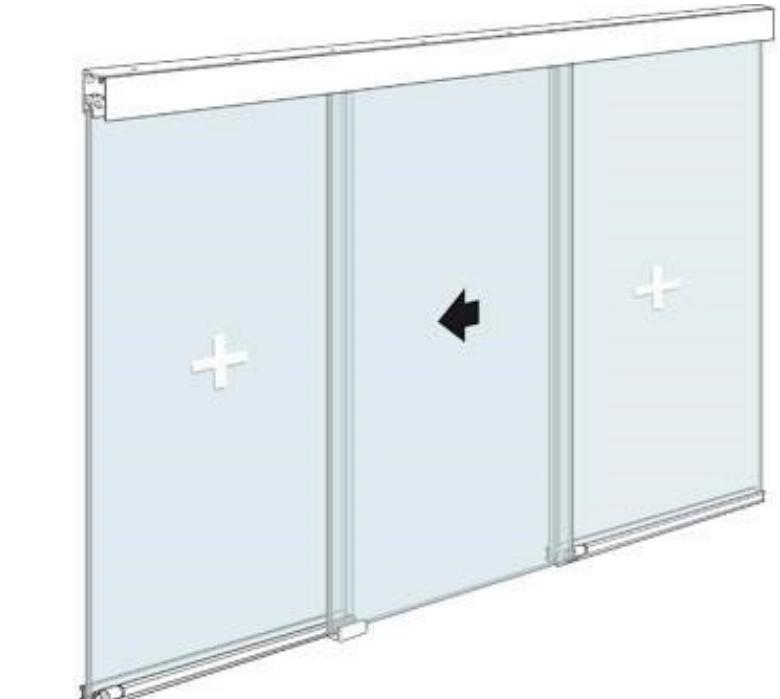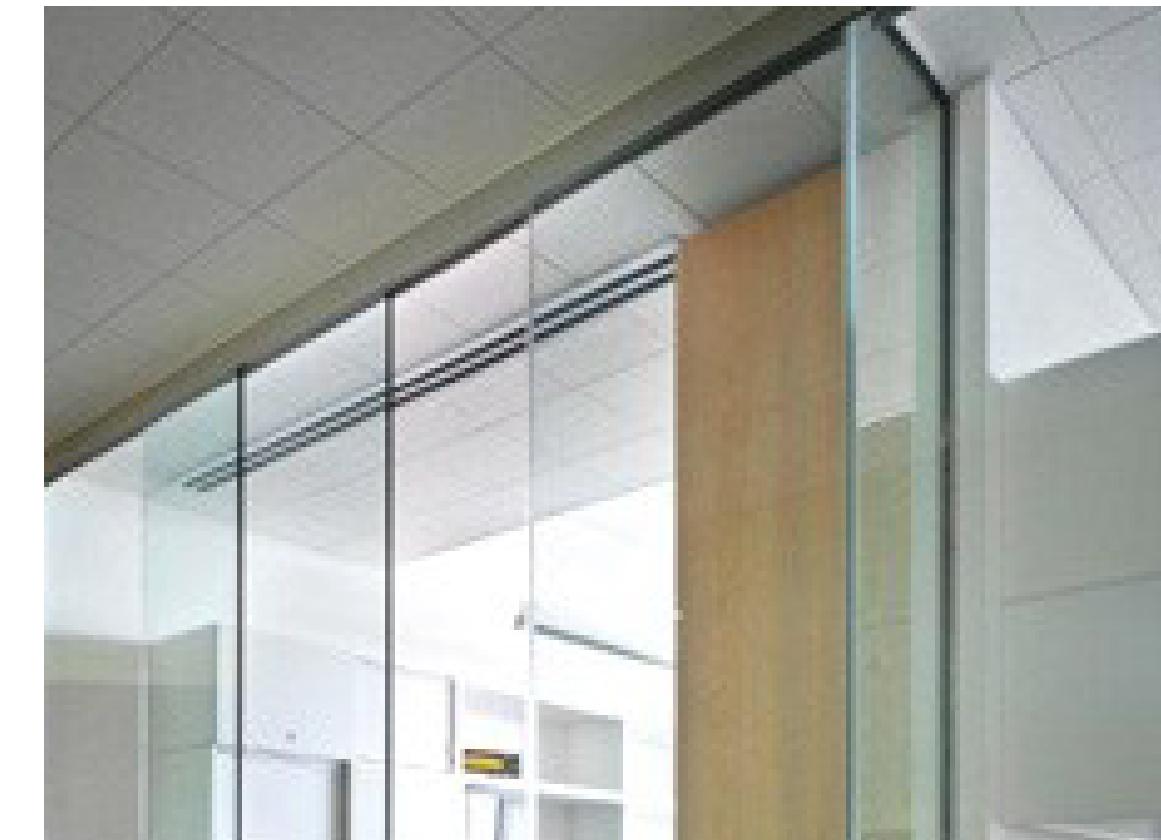

3 Fixed Glass Panels and 1 Sliding Glass Door Right


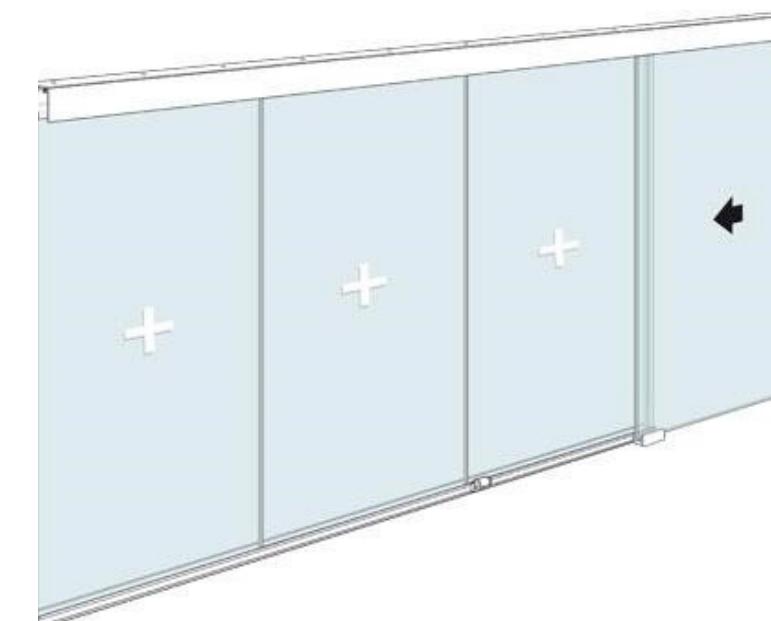


Bi Parting Double Glass Doors

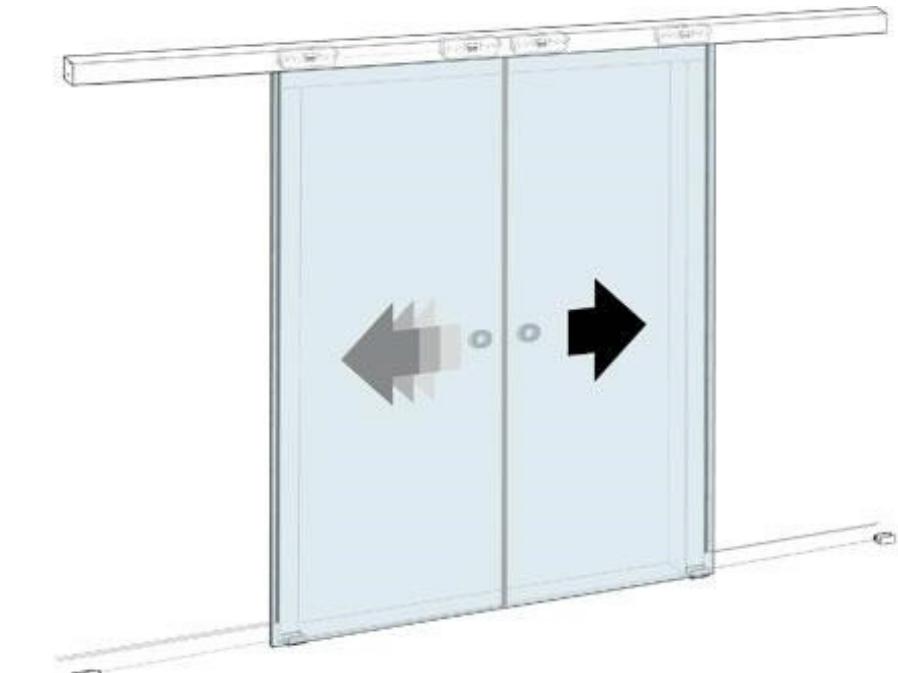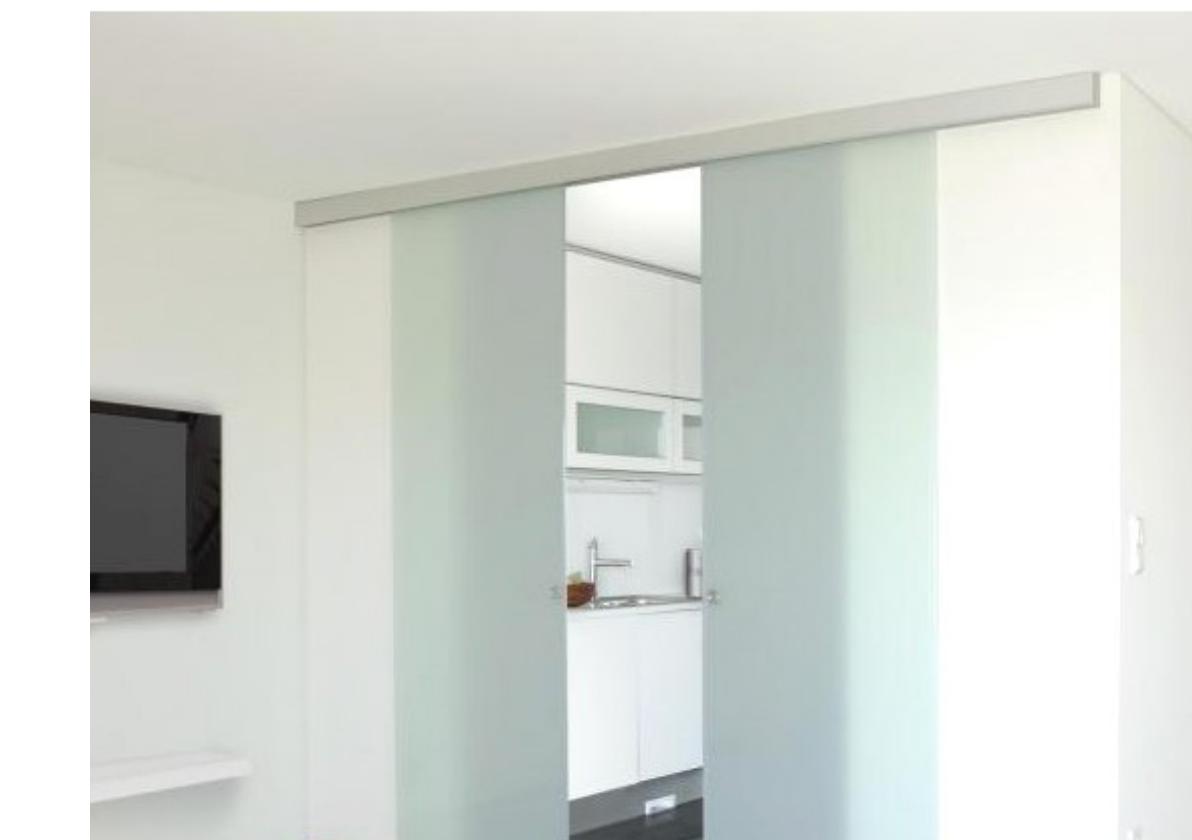


COVERT 144" SERIES SOFT CLOSE SLIDING SYSTEM APPLICATIONS




Bi Parting Double Glass
Doors w/ 2 Fixed Panels

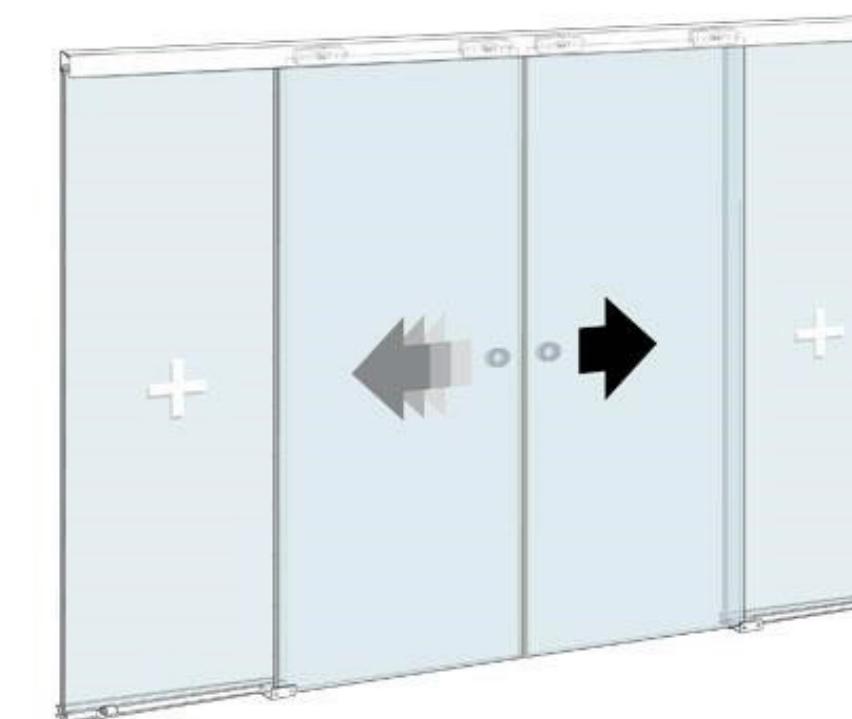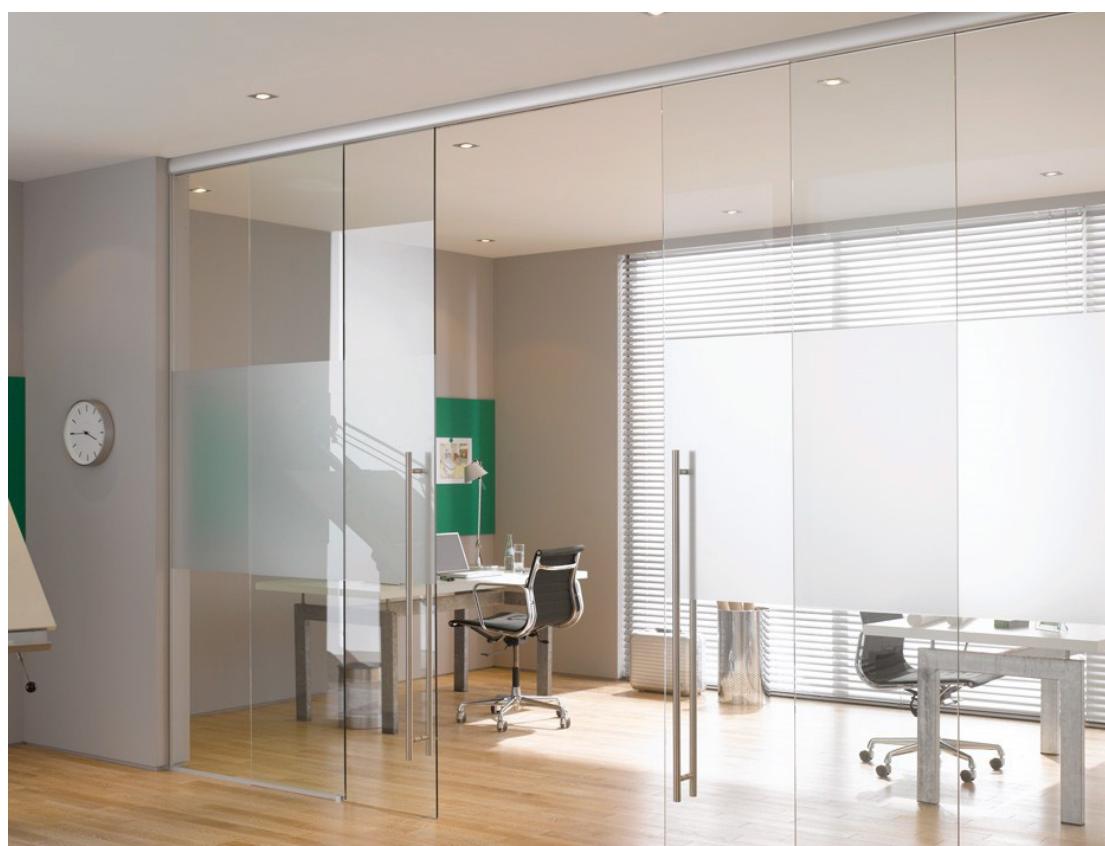


90° Corner Unit w/ Double Bi Parting Glass Doors

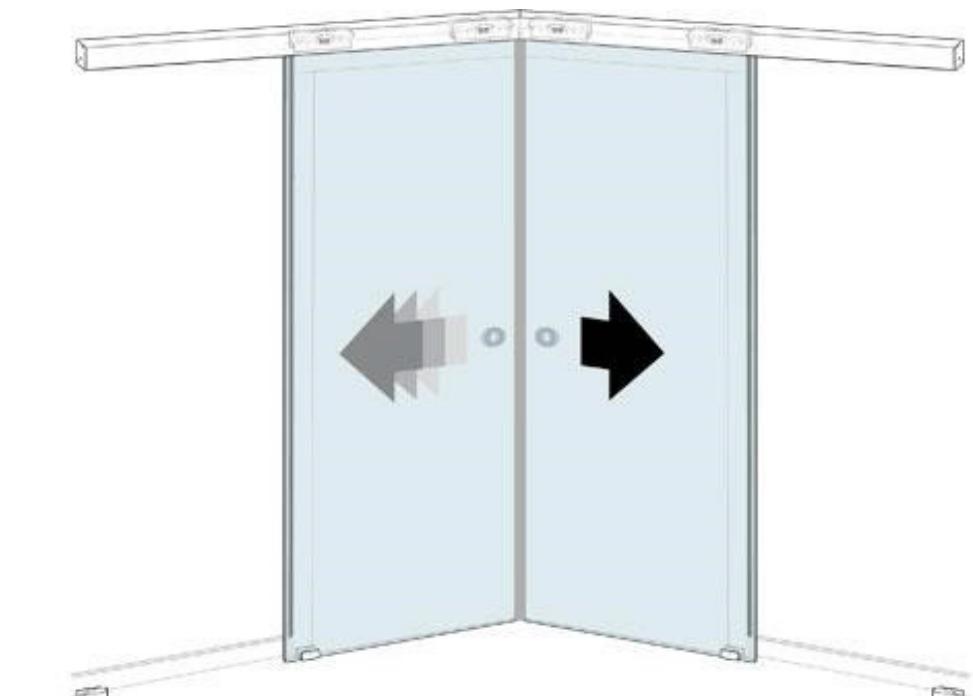

90° Corner Unit 2 Fixed Glass
Panels w/ Double Bi Parting Glass Doors

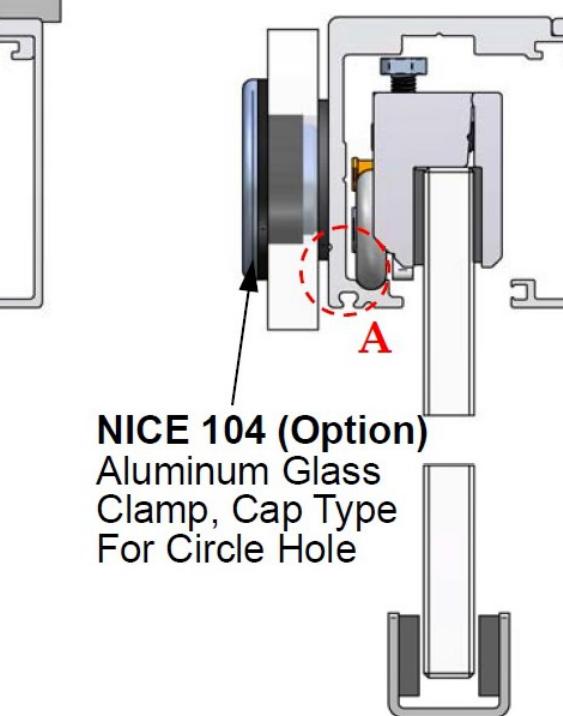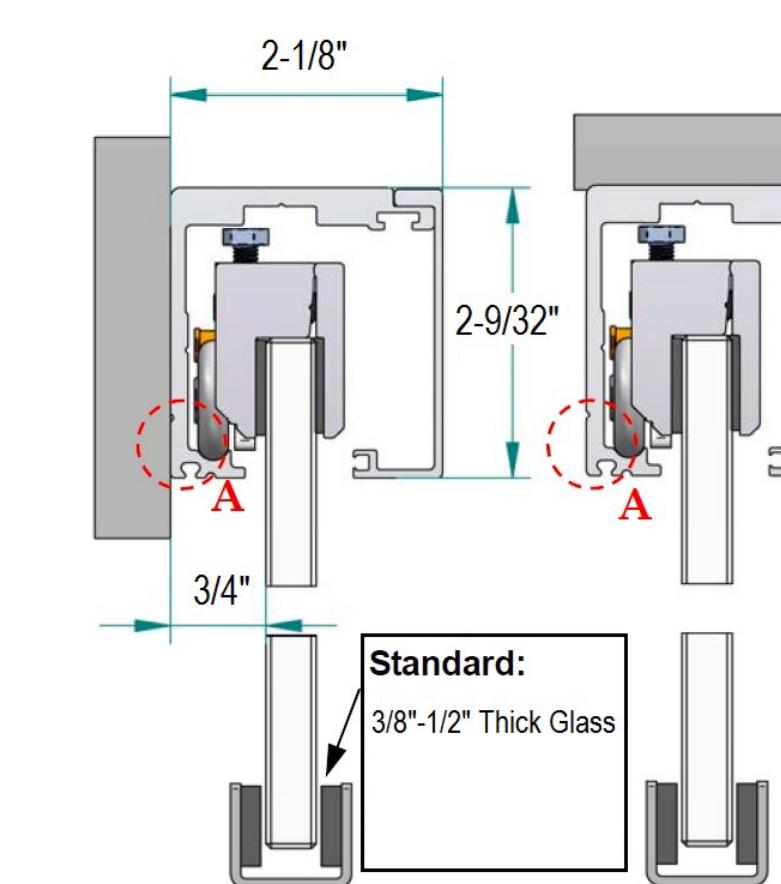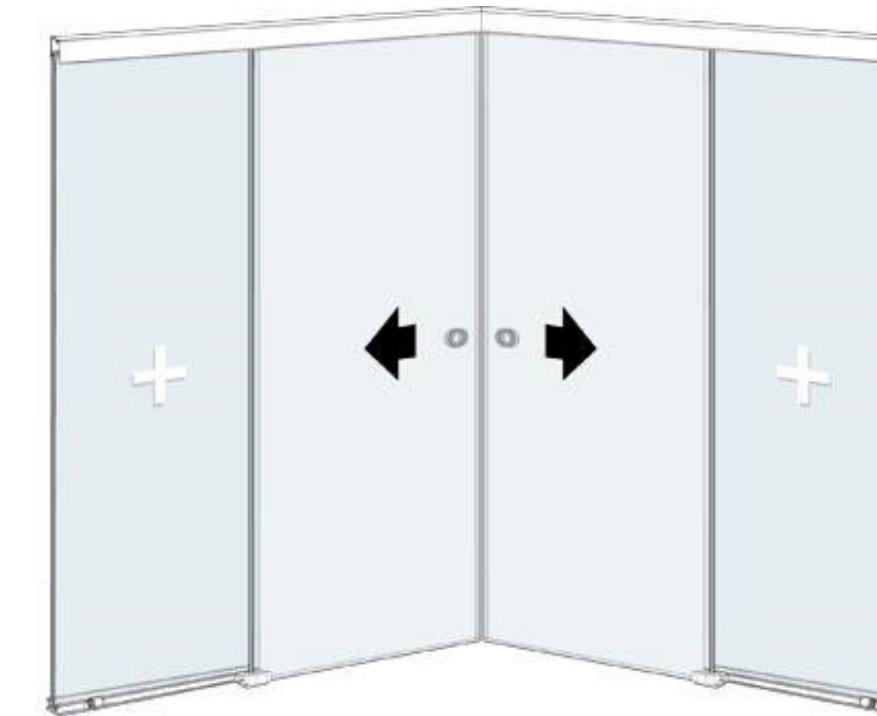

Extra Frame Added (A)
(Option) Side panel

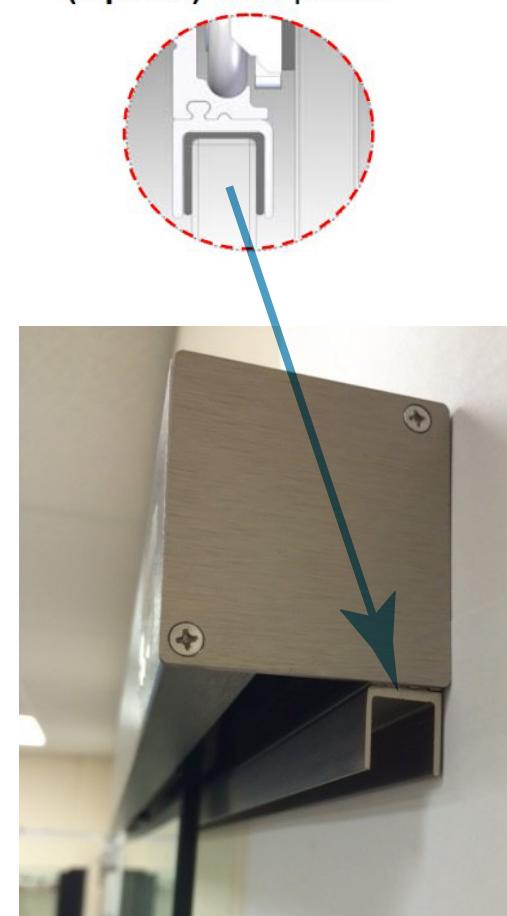

HYDRA-110 HYDRAULIC SERIES SHOWER DOOR HINGES




HYDRA-110 HYDRAULIC SERIES SHOWER DOOR HINGES

Sold as Pair

- Max Weight Per Pair-176 lbs
- Max Width is 40"
- Chrome and brushed
- Adjustable closing Speed - 4-15 seconds



Door Opening Degrees & Functions

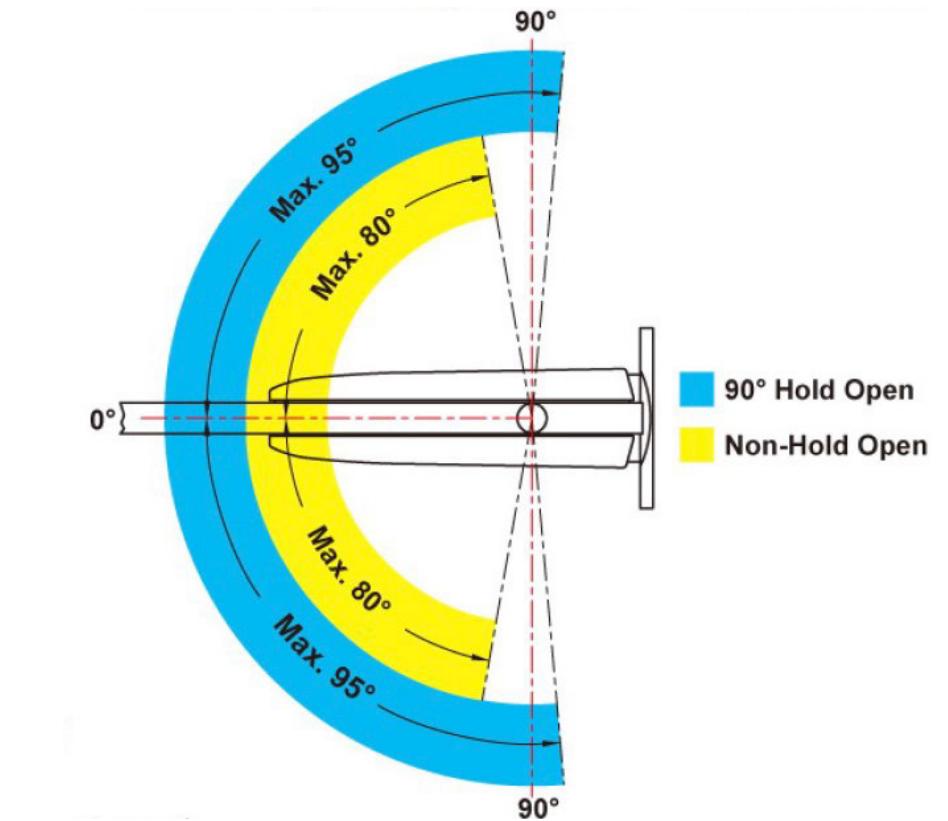

HYDRA-110




HYDRA-360 SELF CLOSING HYDRAULIC HINGES FOR INTERIOR GLASS DOORS

Sold as Pair



- Max weight per pair-176 lbs
- Max width is 40"
- Chrome and brushed
- Adjustable closing speed-4-15 seconds



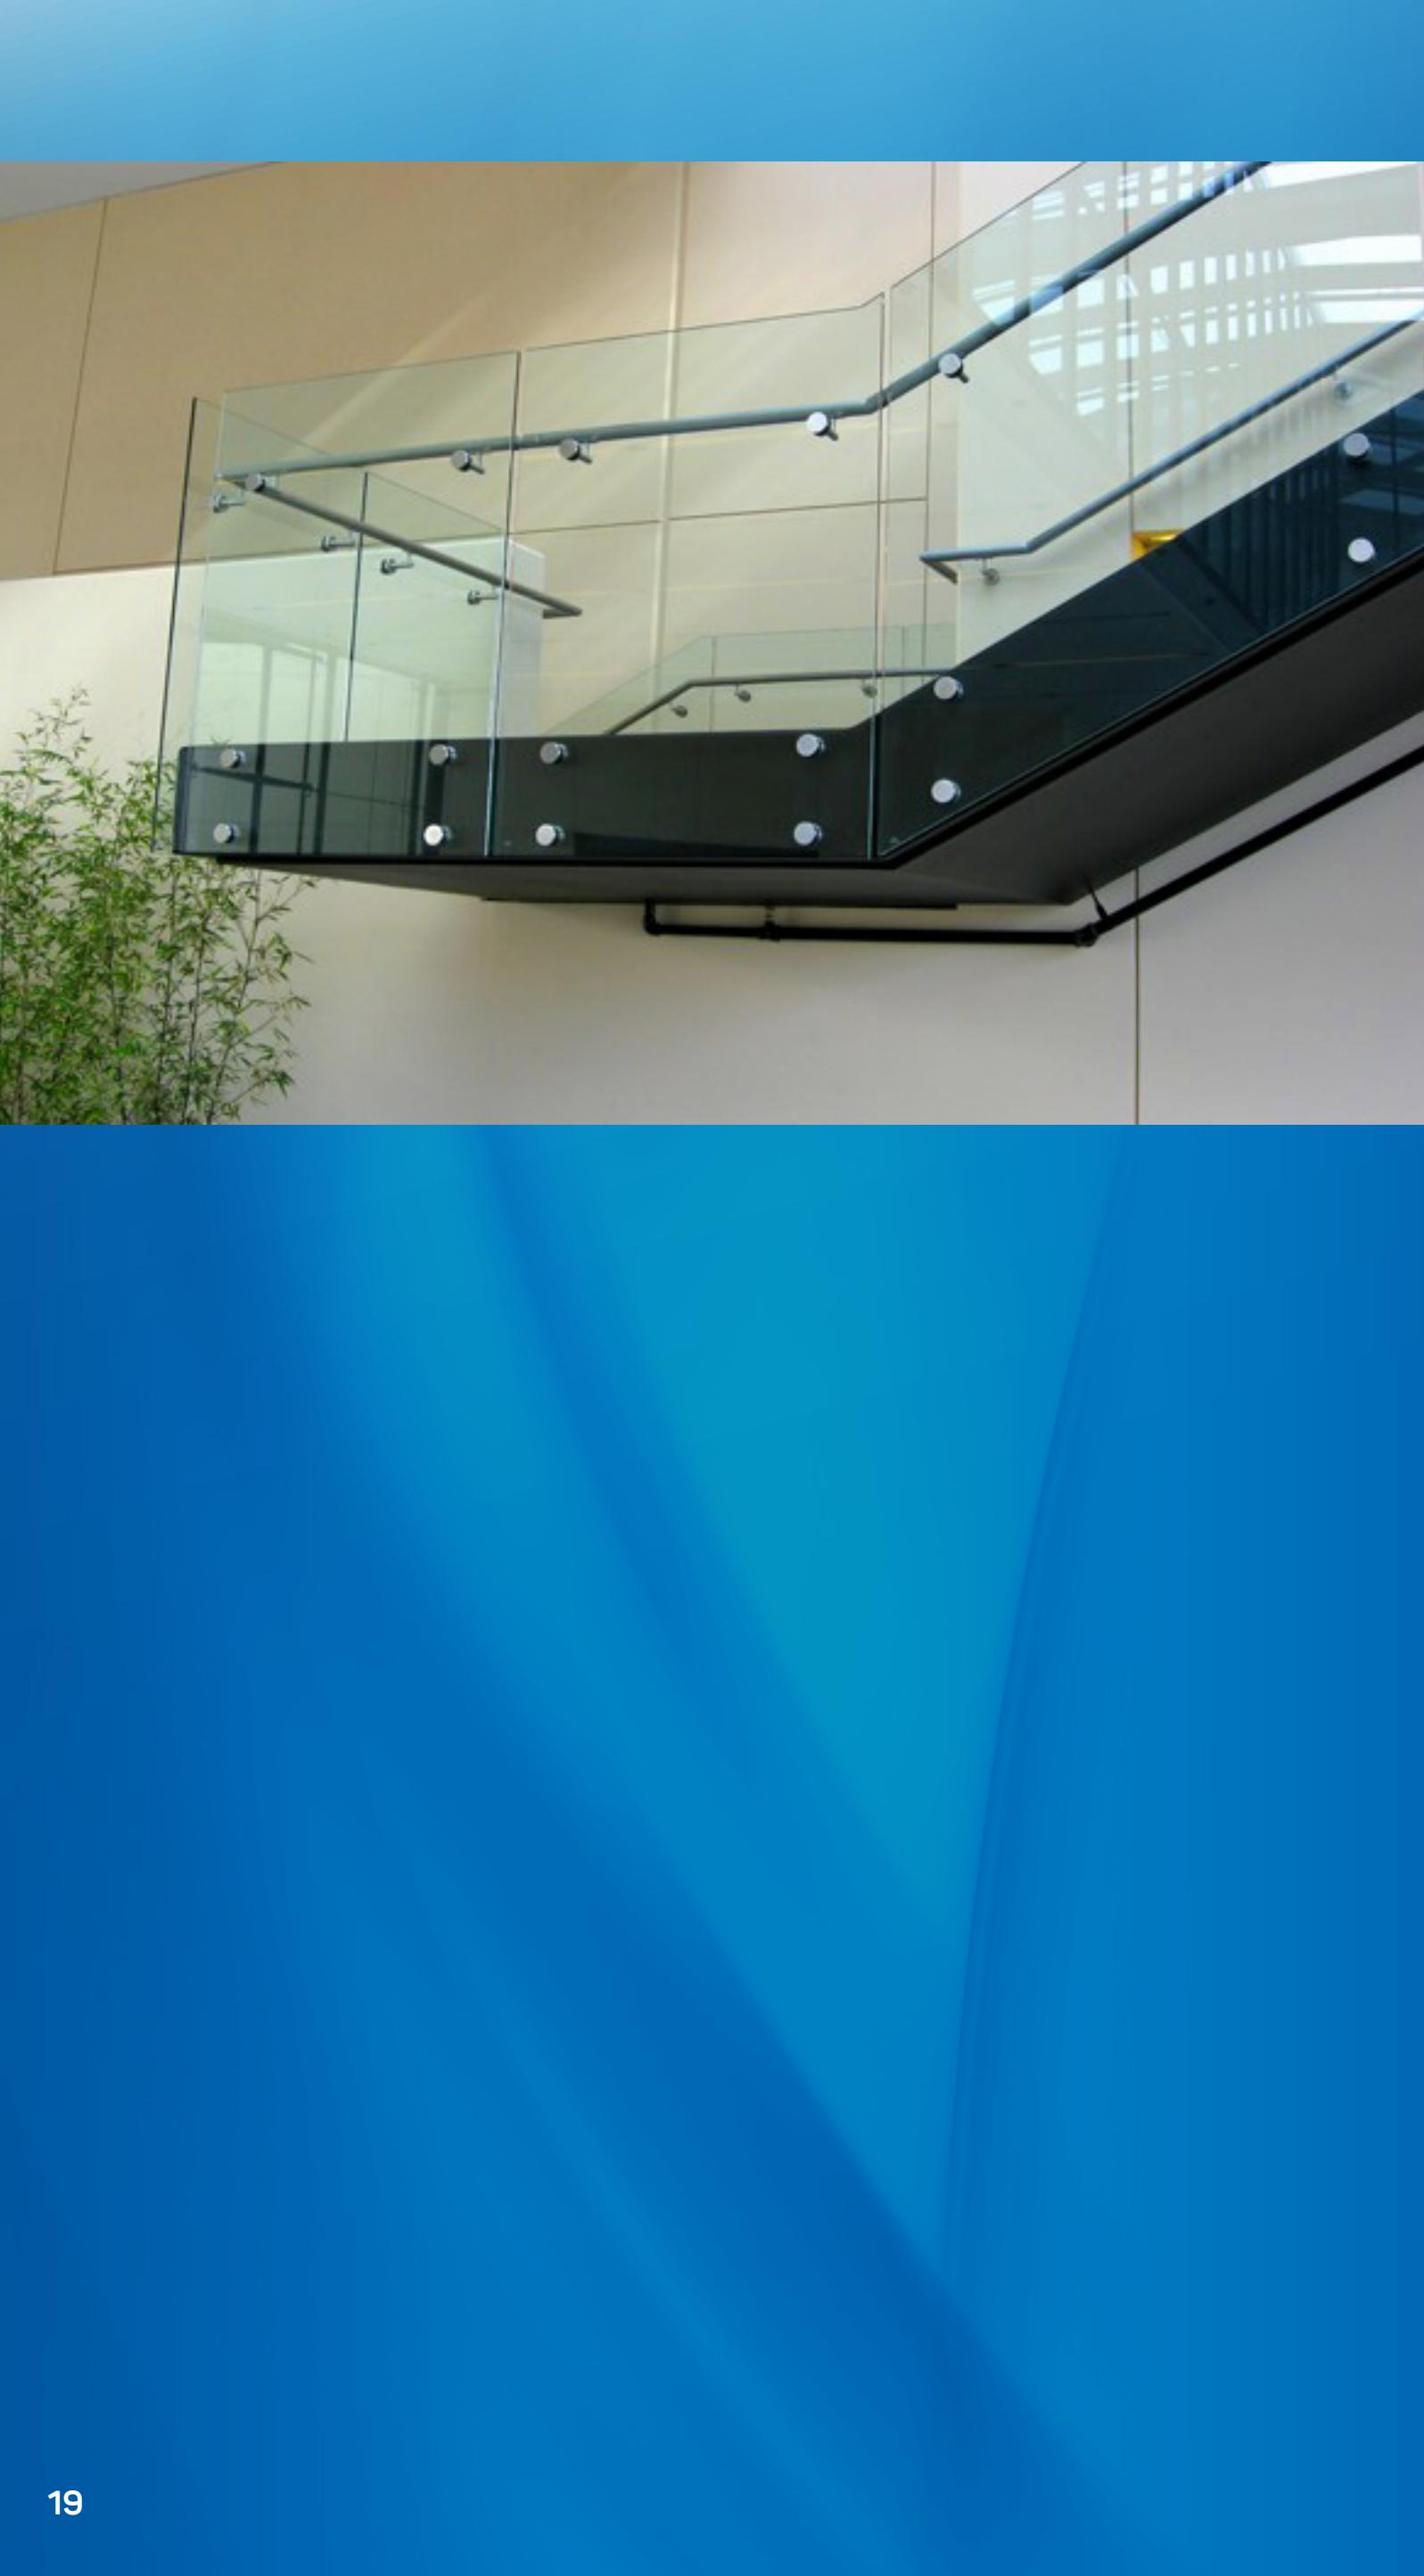

316 STAINLESS STEEL 2" DIAMETER BY 1 3/4" LONG STAND-OFFS

Standoffs are perfect for attaching heavy glass, granite, and marble to the top of cabinetry. They can be mounted using the 3/8"-16 thread allen screws, threaded rods, or hanger bolts. They are 3/8"-16 threaded up to 1" (25.4 mm) deep at both ends.

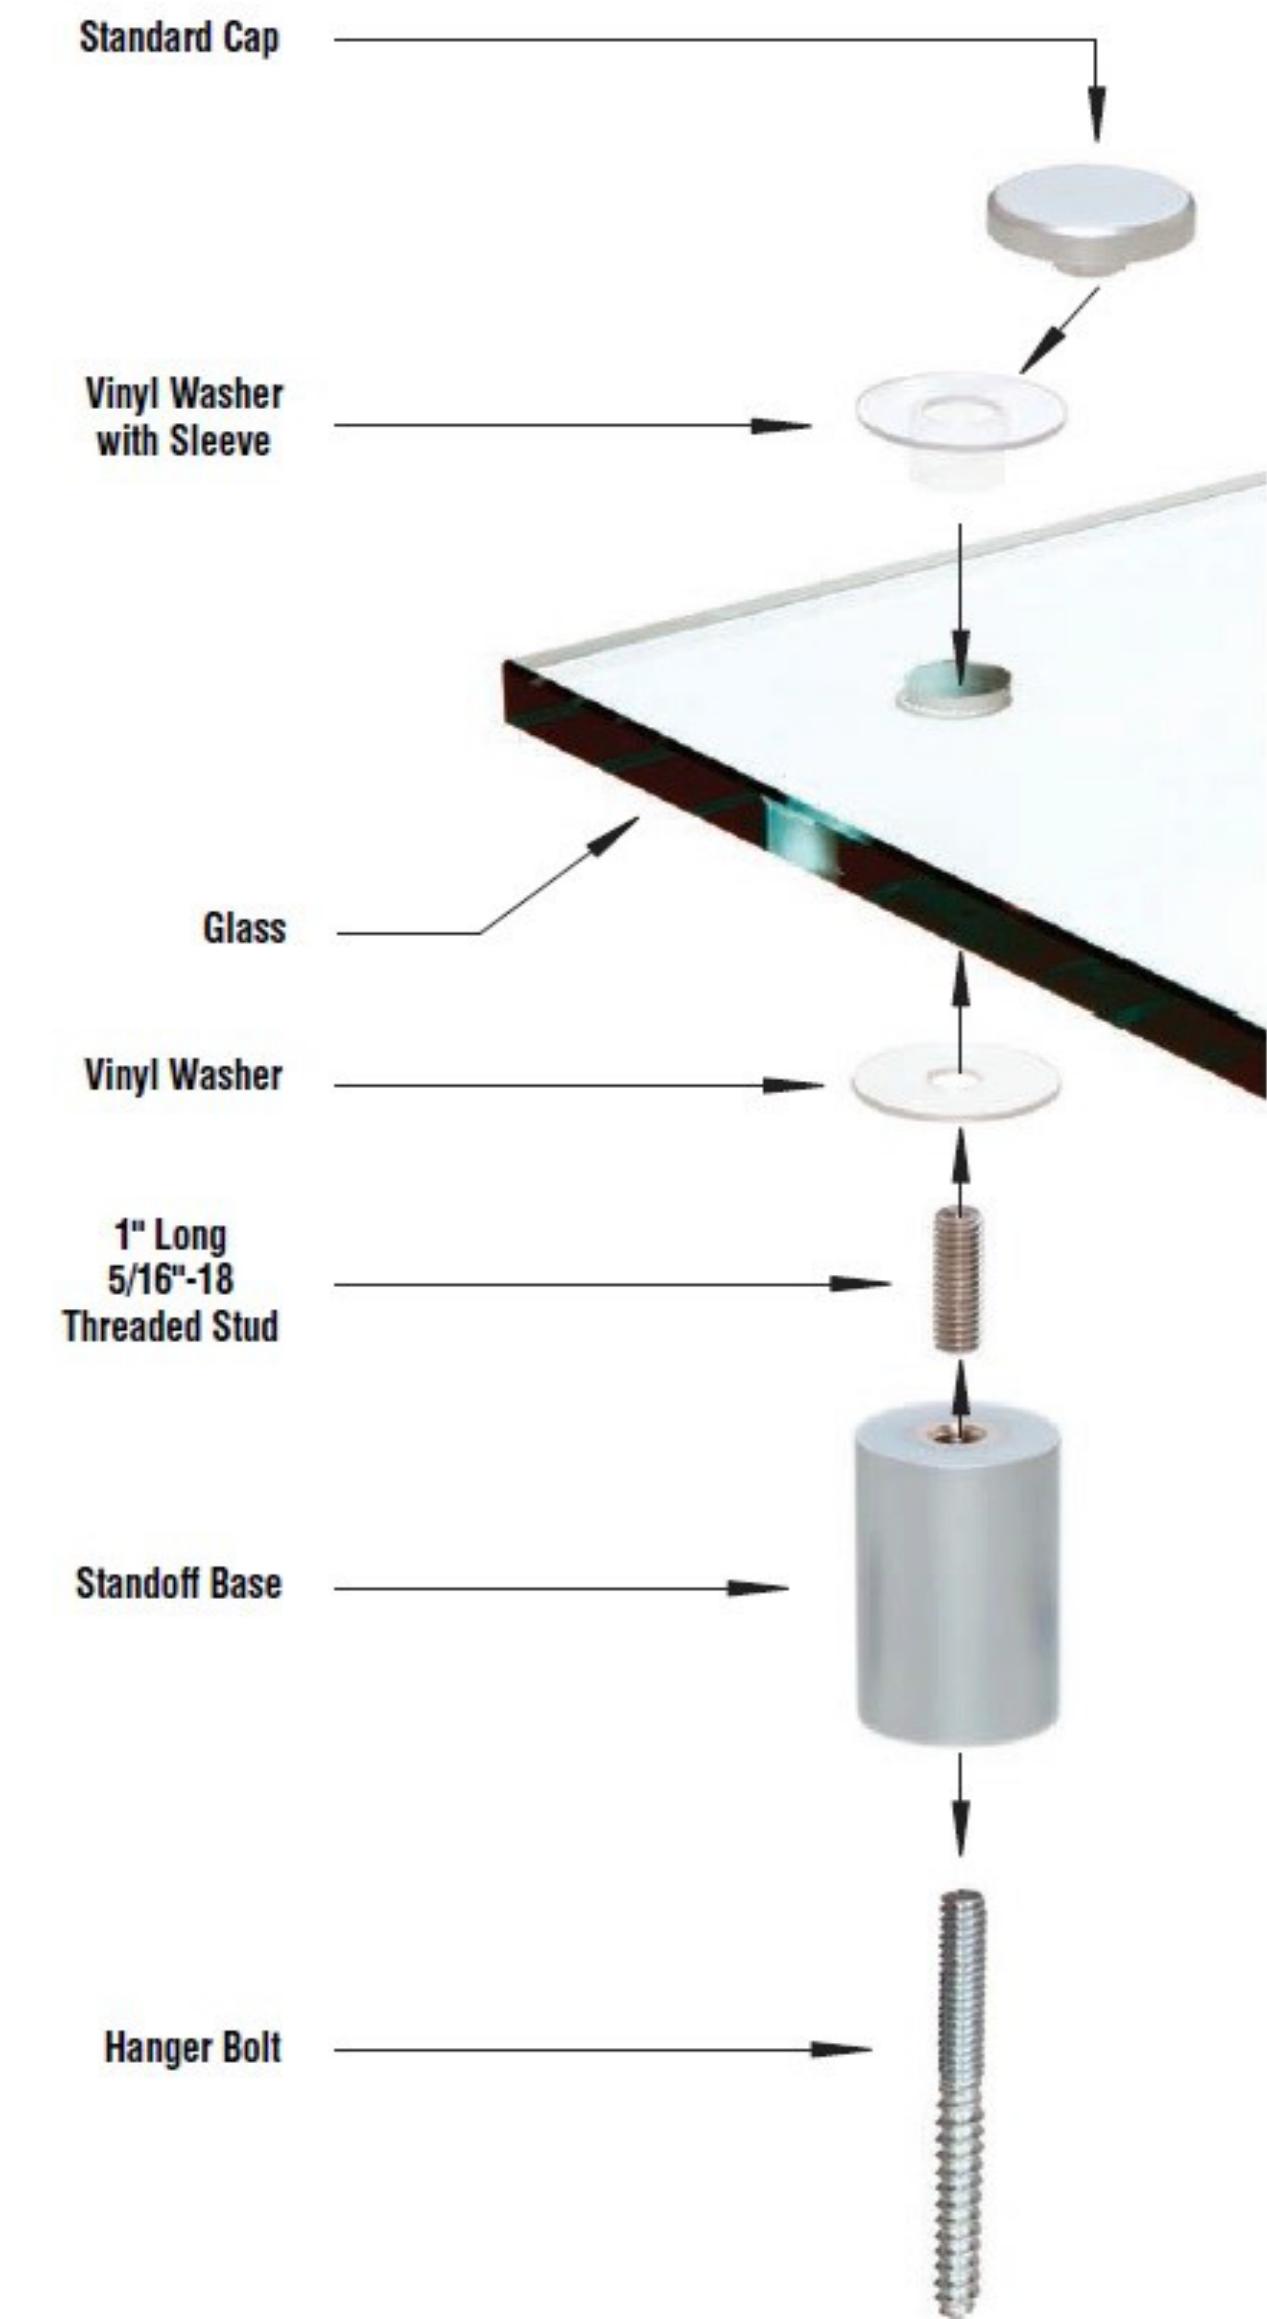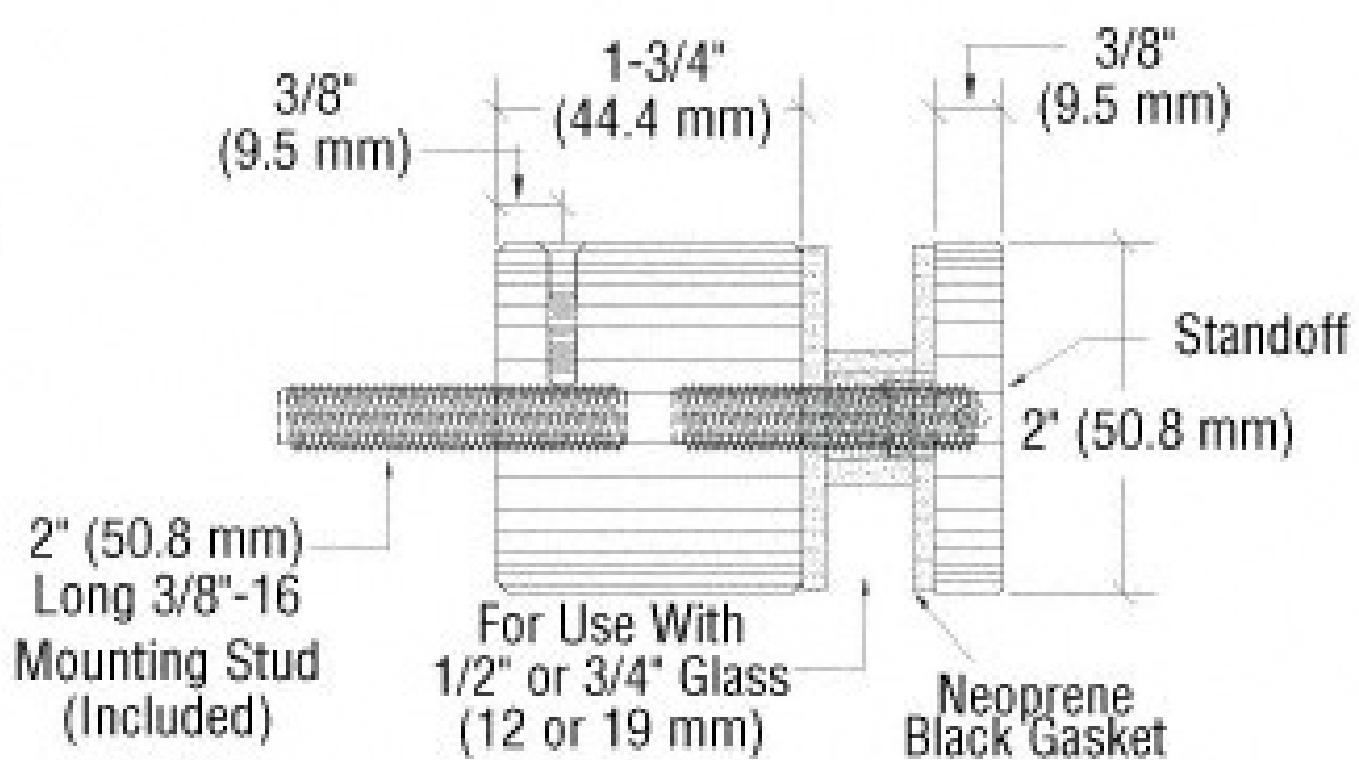




CARBIDE TILE / GLASS DRILL BITS

- Carbide spear point with uniquely sharpened edges for easy penetration in glass, mirrors, ceramics and other hard brittle materials like stucco
- Cuts perfectly round holes without chipping or breaking the material
- Spear-pointed tip design reduces breakout and the bit features a carbide tip for extended bit life

Straight Shank

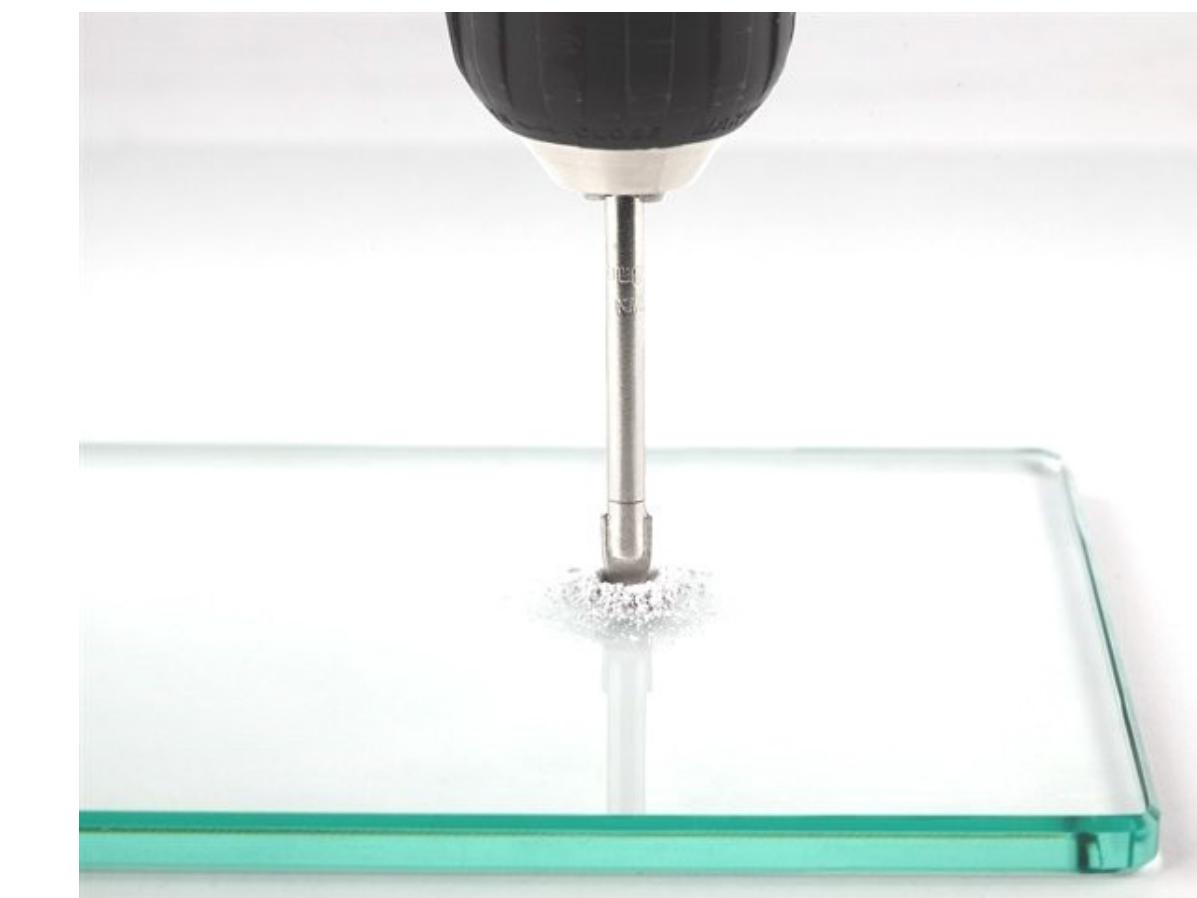

Hexagon Shank



Straight Shank Drill Bits

- 1/8"
- 3/16"
- 1/4"
- 5/16"

HEX Shank Drill Bits

- 1/8"
- 3/16"
- 1/4"
- 5/16"

FLUX POLISHED CHROME SERIES INTERIOR BARN DOOR HARDWARE

SGS Flux Designer Sliding System will provide an exceptionally smooth ride and travel as well as an aesthetic modern touch to your home or business. The rail system works with a 1" stainless steel tube which delivers improved performance and aesthetic. It can be used with materials such as glass or wood depending on the environment. This system is ideal for closet doors, bedrooms, bathrooms, office and more. We invite you to browse our site. We believe you will find the right solution to your needs. We offer kits for Flux Sliding System features.

Flux Sliding System Features:

- Anti-lift features for added safety
- All 316 alloy brushed stainless steel construction
- Ideal for interior applications
- For use with 3/8" tempered glass
- Maximum door weight: 220 lbs.
- Maximum panel width: 53-1/2"
- Maximum panel height: 98-7/16"
- Maximum track length: 105"




Finishes Available



FLUX SERIES SLIDING GLASS DOOR KITS




FLUX SERIES SLIDING GLASS DOOR KITS

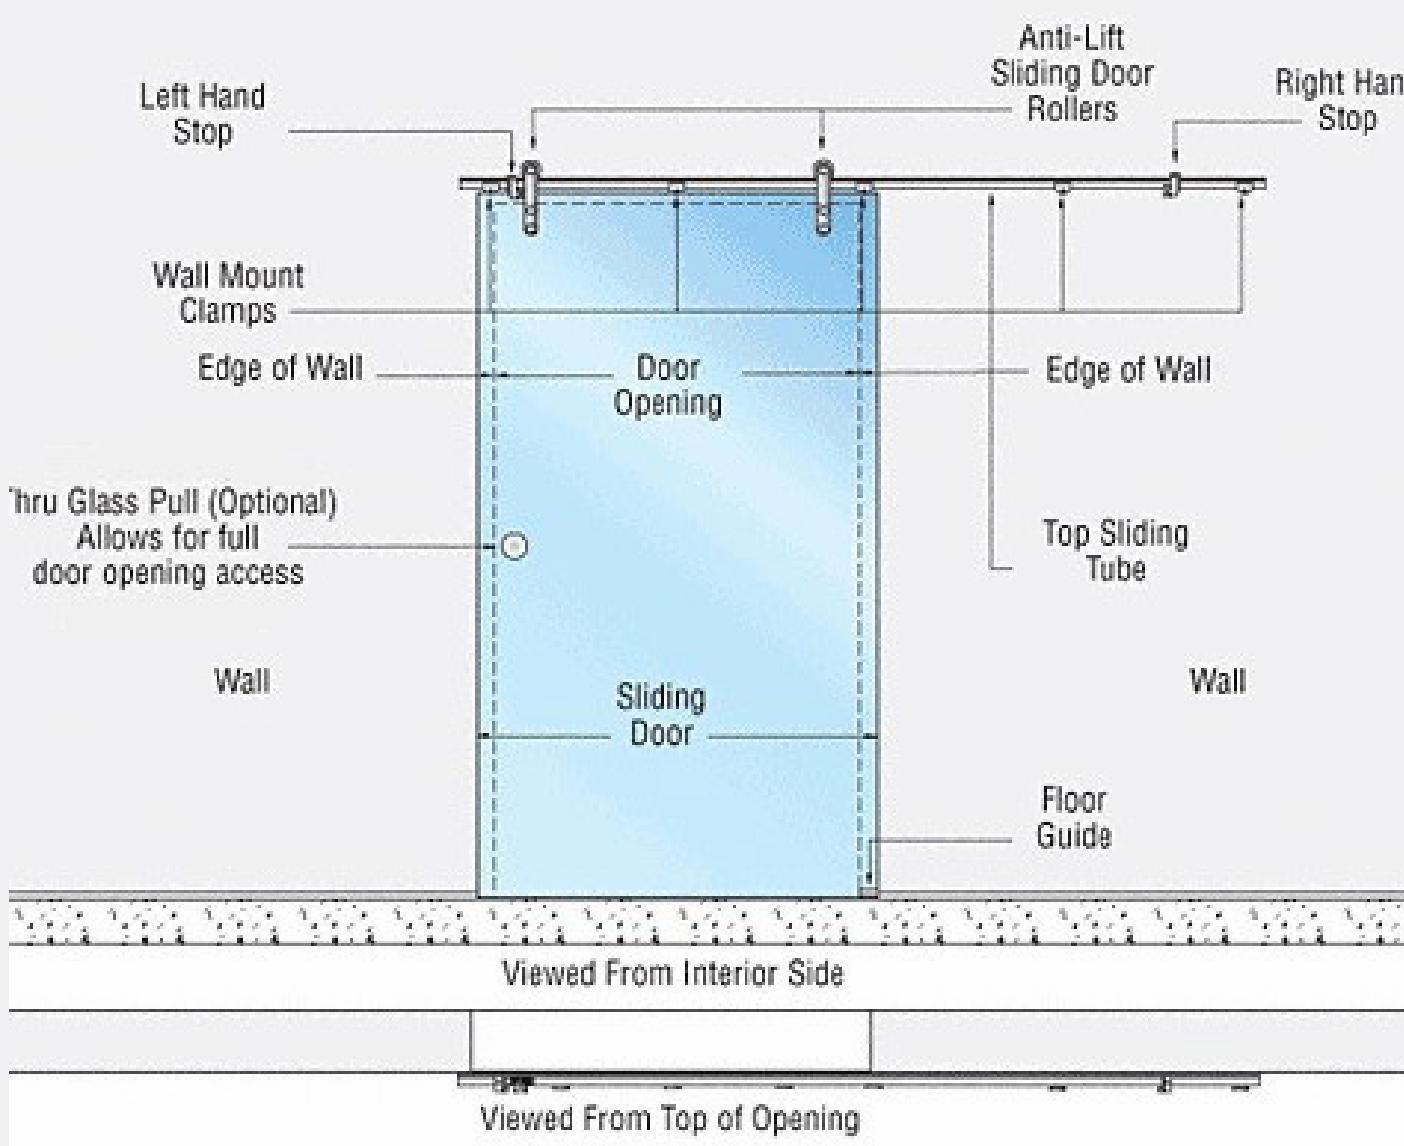


Flux Series Double Sliding Door Wall/Surface Mount

Kit Includes:

2 Top Rollers 1 Left Stop 1 Right Stop 1 Floor Guide 5 Tube to Glass Connectors 2 End Caps 1 Top Sliding Tube 105"

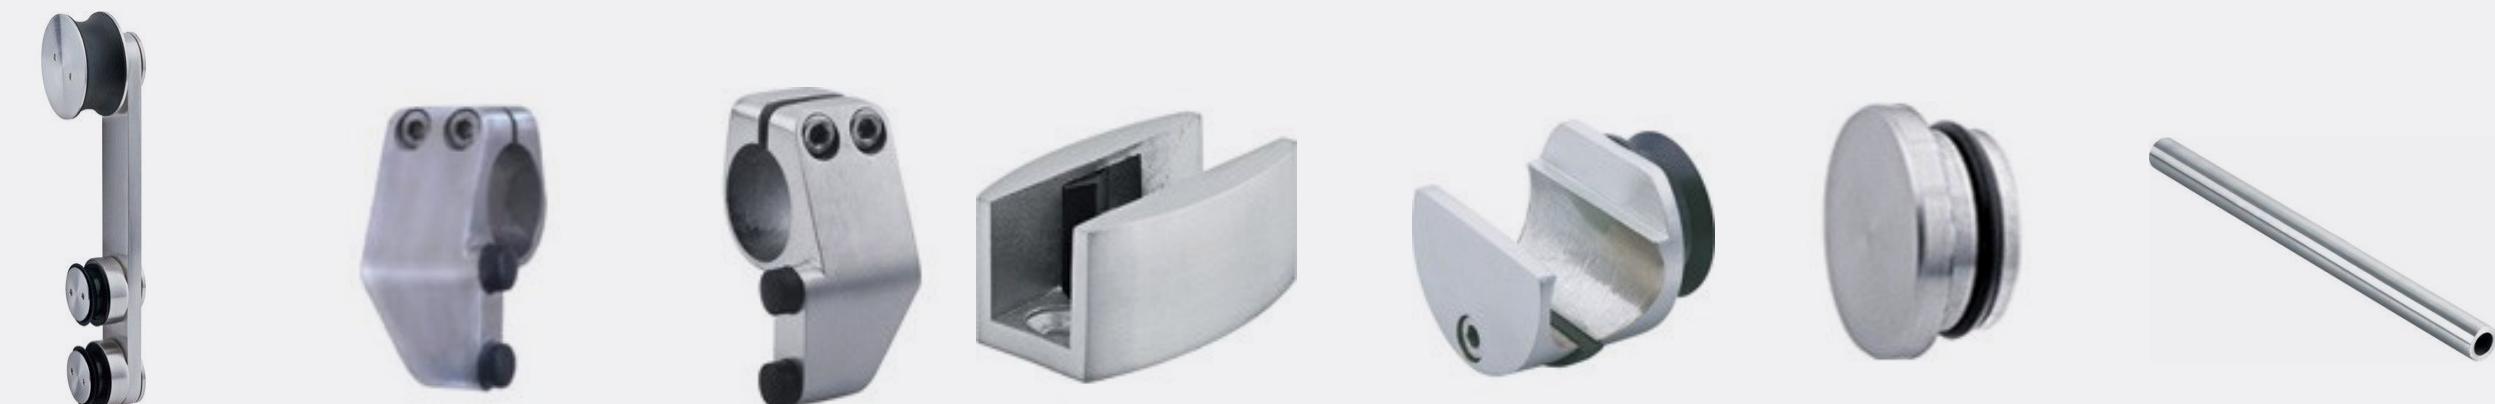

Finishes Available

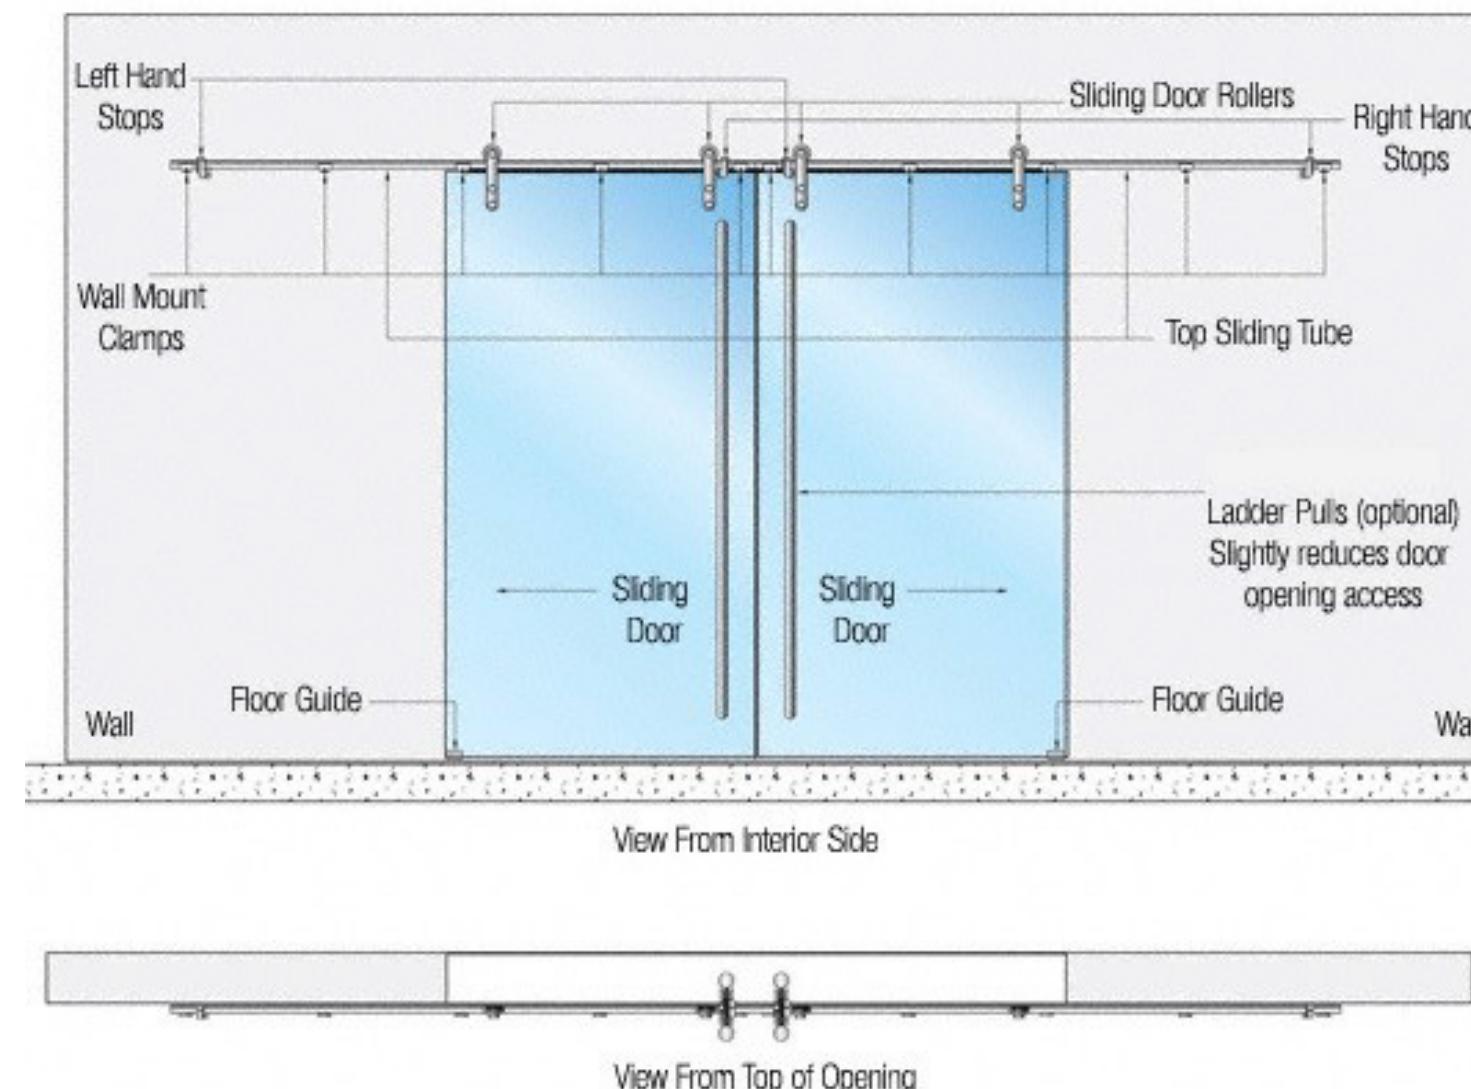

Flux series Single Sliding Door Wall/Surface Mount

Kit Includes:


4 Top Rollers 2 Left Stop 2 Right Stop 2 Floor Guide 10 Tube to Glass Connectors 4 End Caps 2 Top Sliding Tube 105"



Finishes Available



FLUX SERIES SLIDING GLASS DOOR KITS

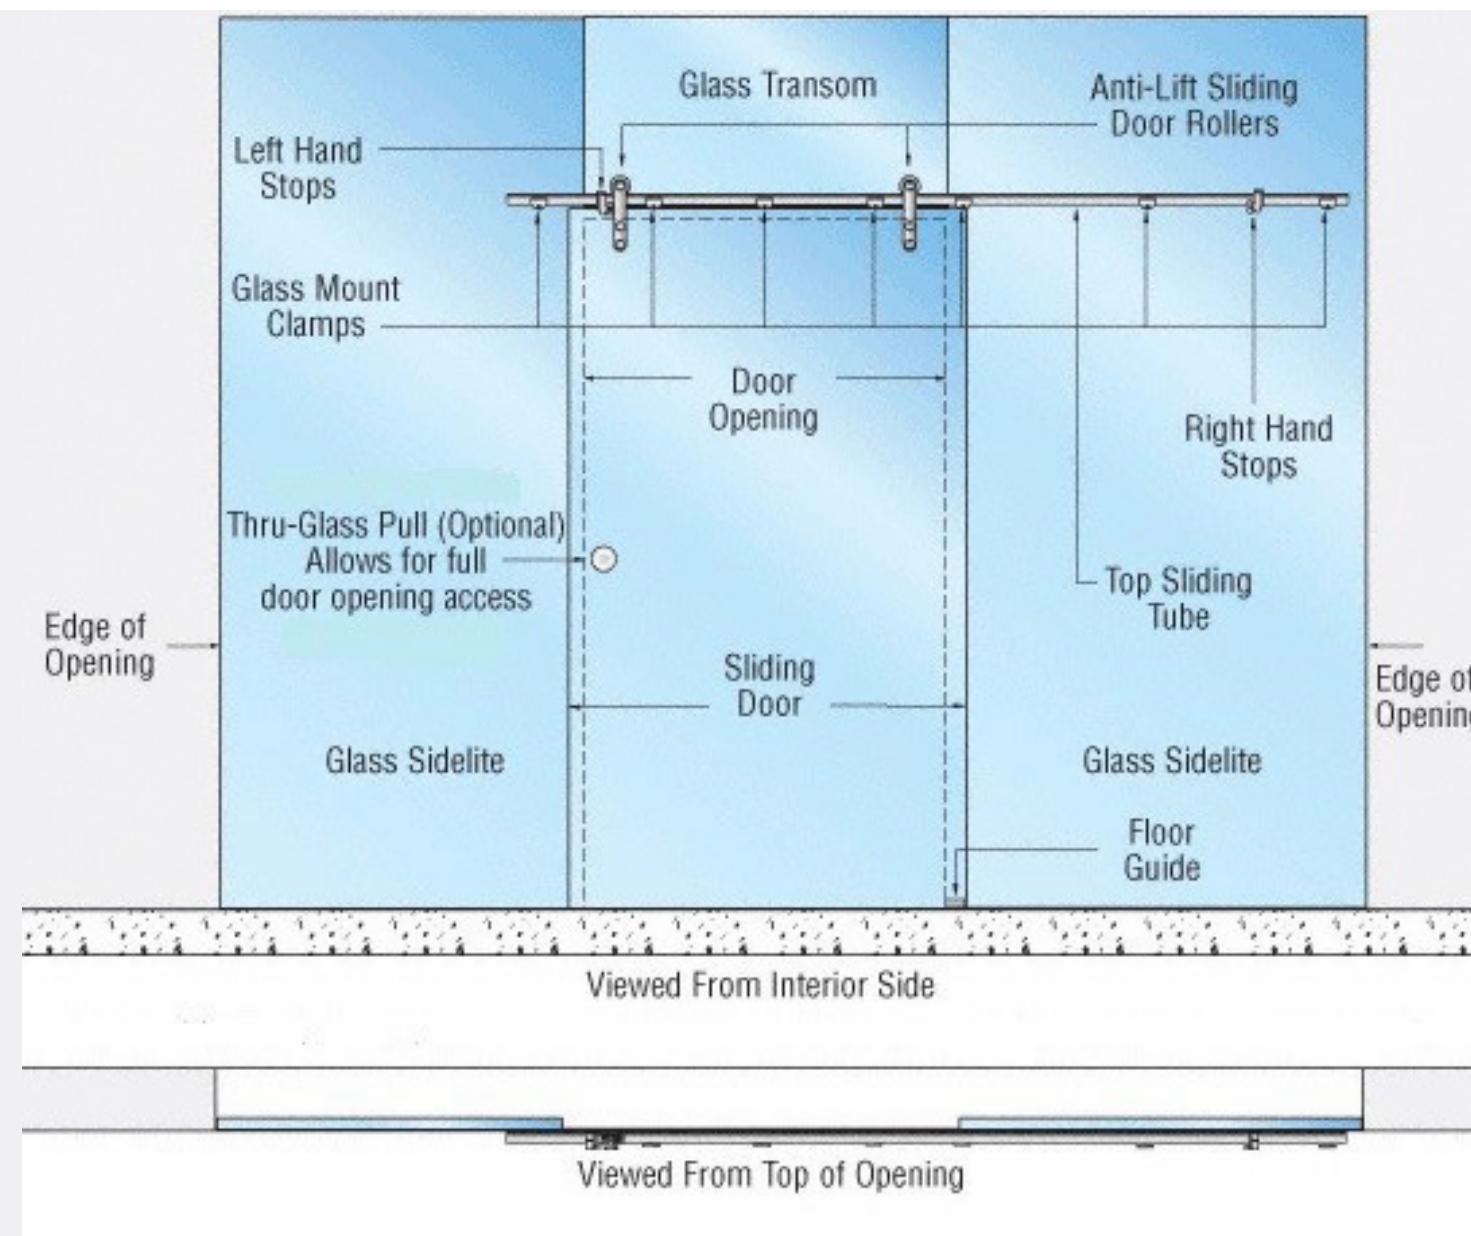


Flux Series Single Sliding Door w/ Sidelites Glass

Kit Includes:

2 Top Rollers 1 Left Stop 1 Right Stop 1 Floor Guide 7 Tube to Glass Connectors 2 End Caps 1 Top Sliding Tube 105"



Finishes Available

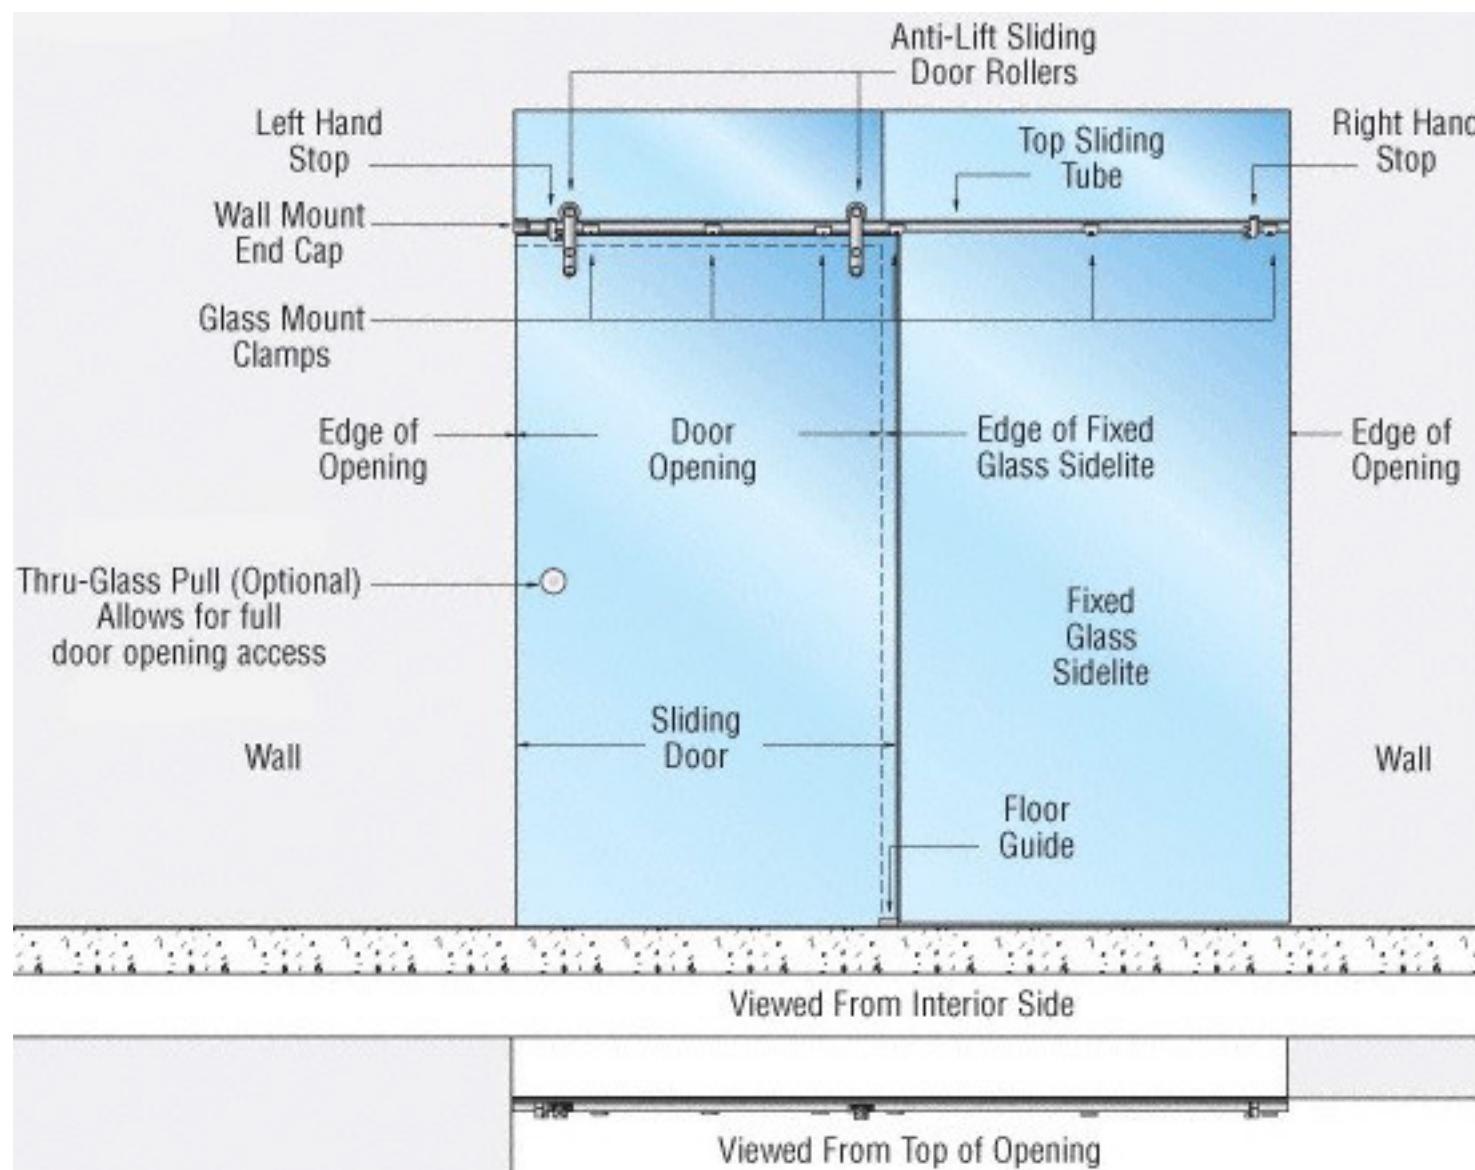

Flux Series Single Sliding Door Glass Mount

Kit Includes:


2 Top Rollers 1 Left Stop 1 Right Stop 1 Floor Guide 6 Tube to Glass Connectors 2 End Caps 1 Track 105" 1 Wall Mount End Cap



Finishes Available



FLUX SERIES SLIDING SHOWER DOOR

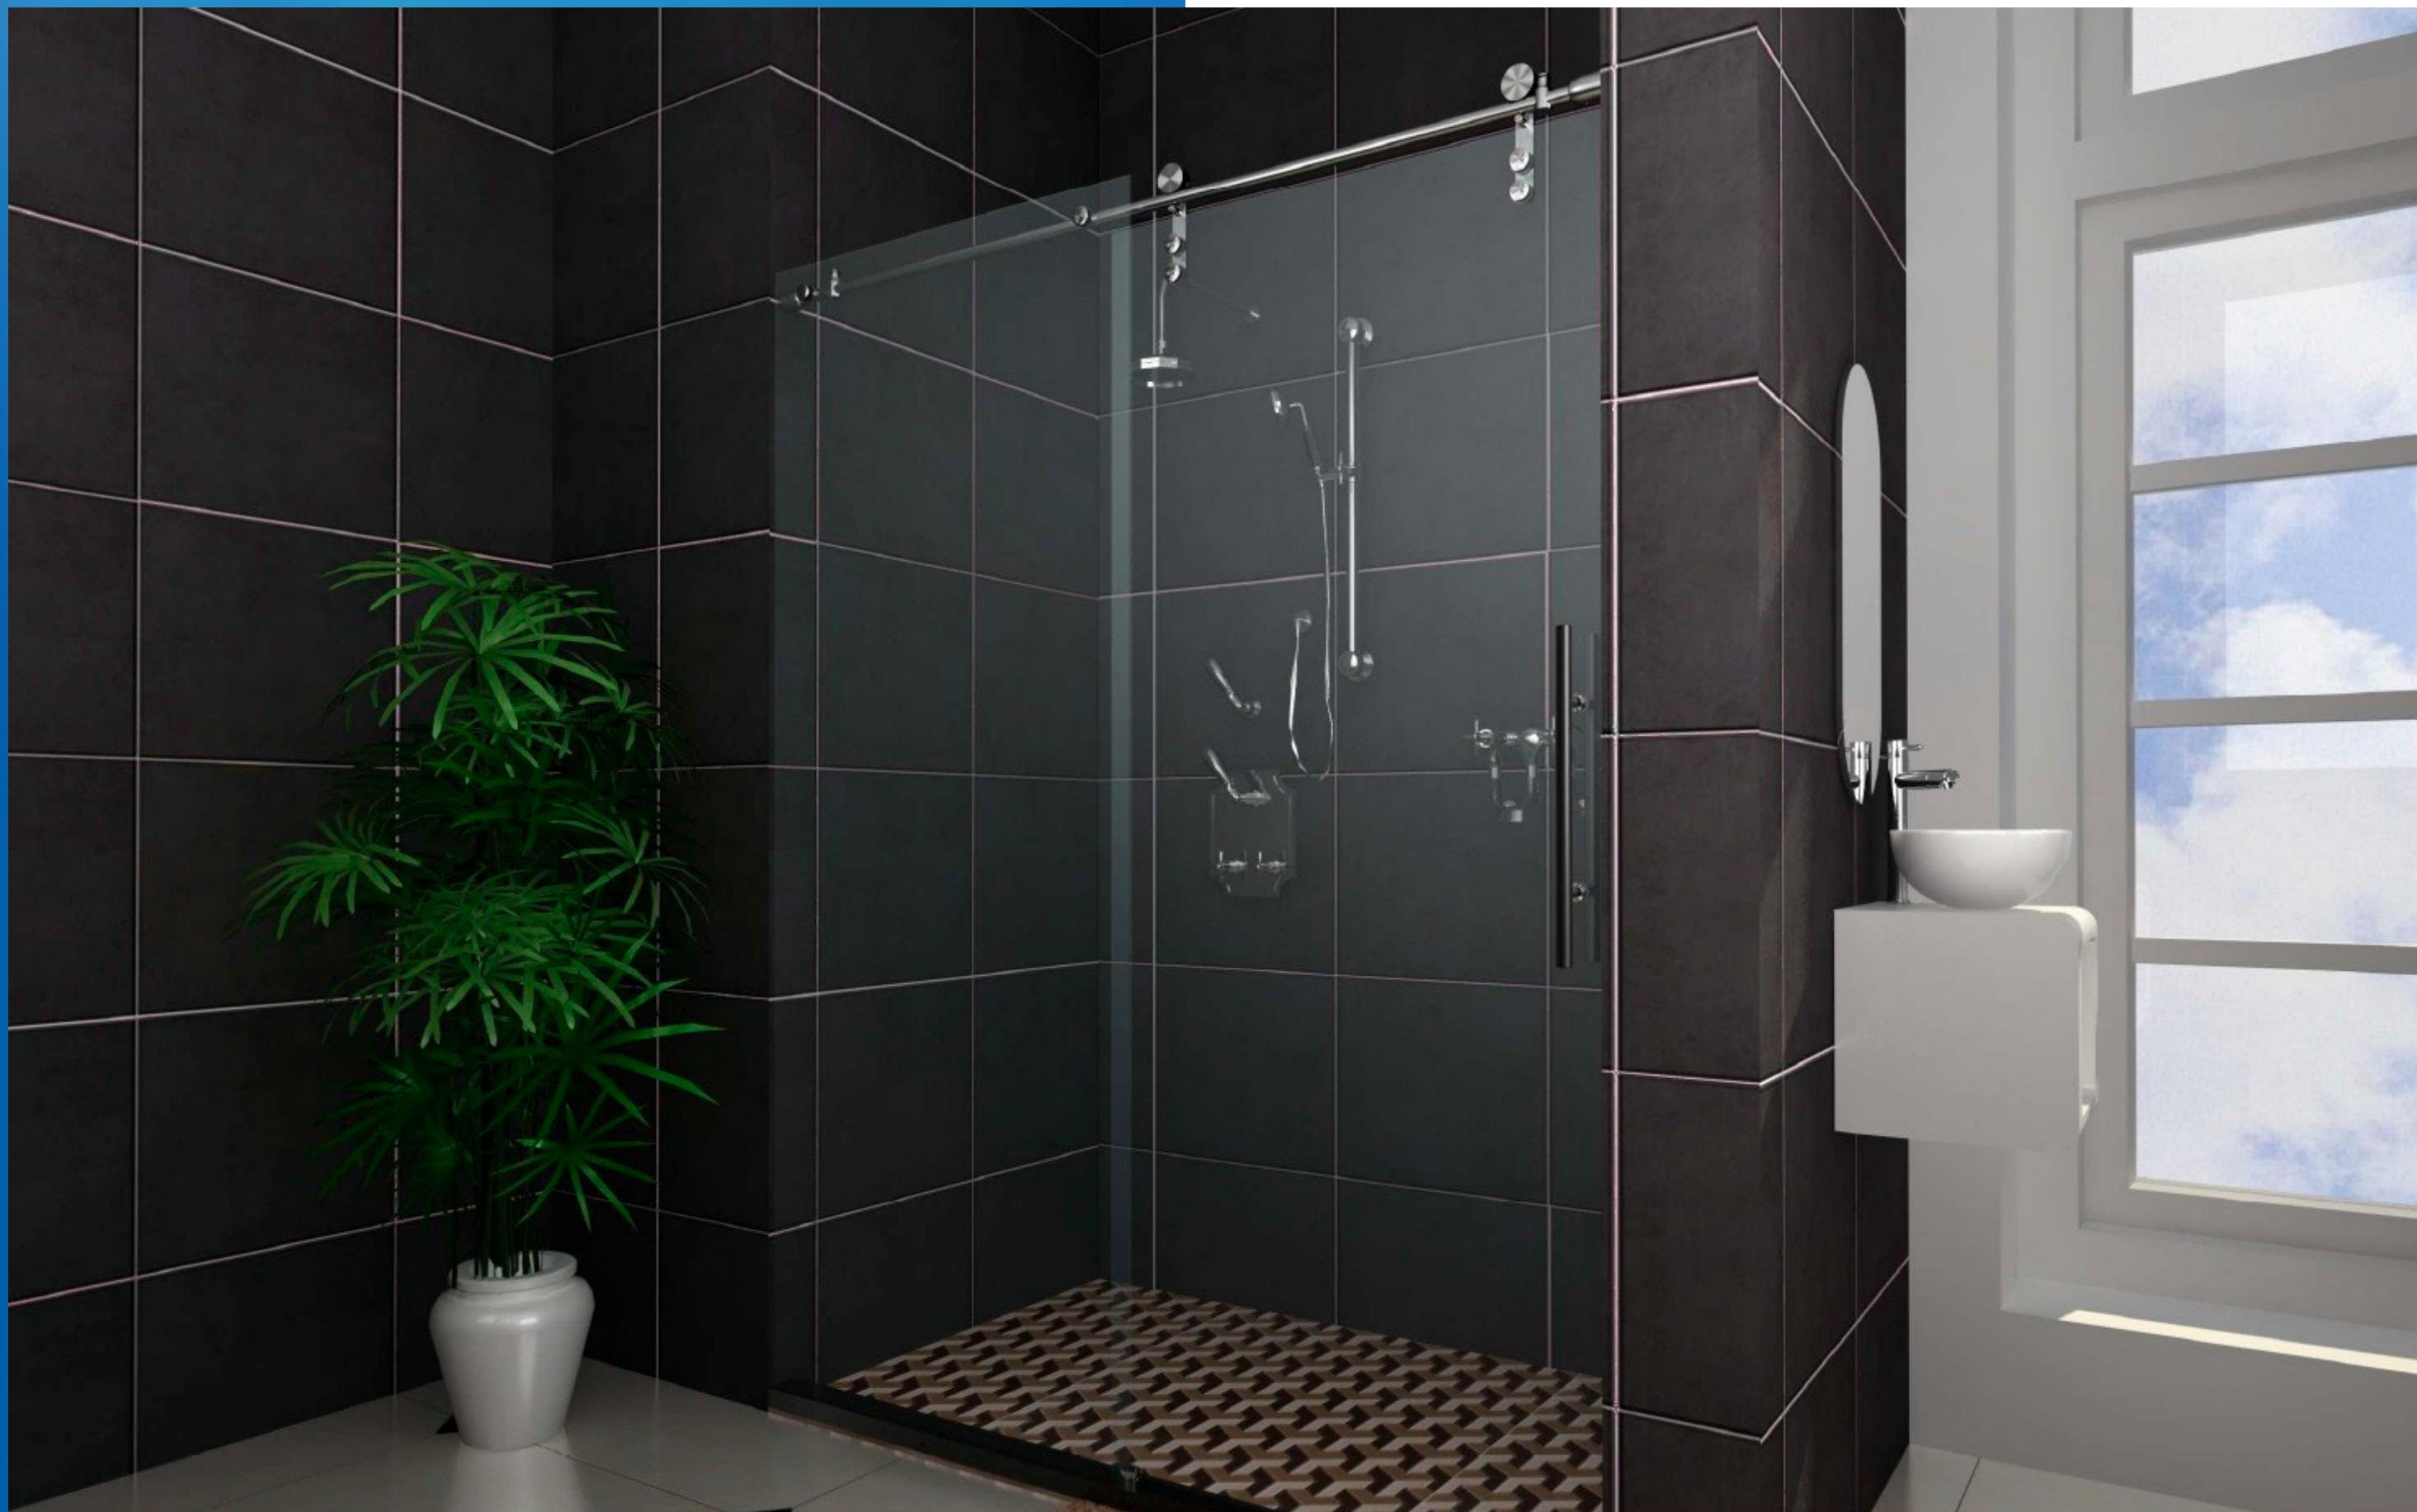

Finishes Available



Chrome



Brushed Nickel



Matte Black

Designed for use with 3/8" glass. Sliding system includes all necessary hardware needed for installation (glass not included).

The rail system works with a 1" stain-less steel tube which delivers improved performance and aesthetic.

Heavy duty adjustable rollers allow for easy leveling of the glass when installing.

2 Top Rollers



1 Left Stop



1 Right Stop



1 Floor Guide



2 Tube to Glass Connectors



1 Track
105"




2 Tube Wall Mount
End Caps




FLUX SERIES SLIDING DOOR SPARE PARTS & ACCESSORIES

ESA-1A Sliding Rollers

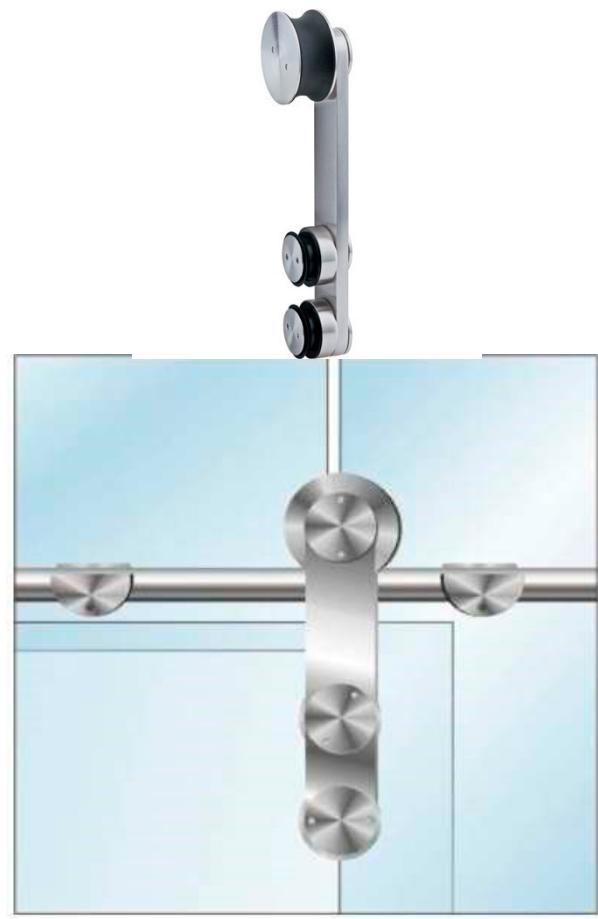


ESA-2 Tube to Surface Clamp

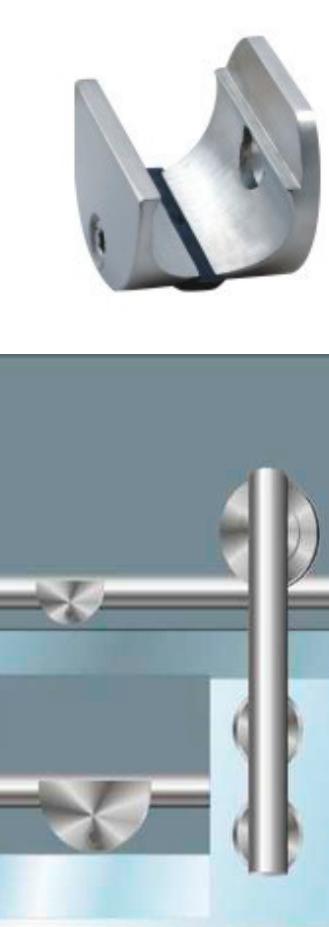


ESA-3 Tube to Glass Clamp



ESA-5L Left Door Stopper

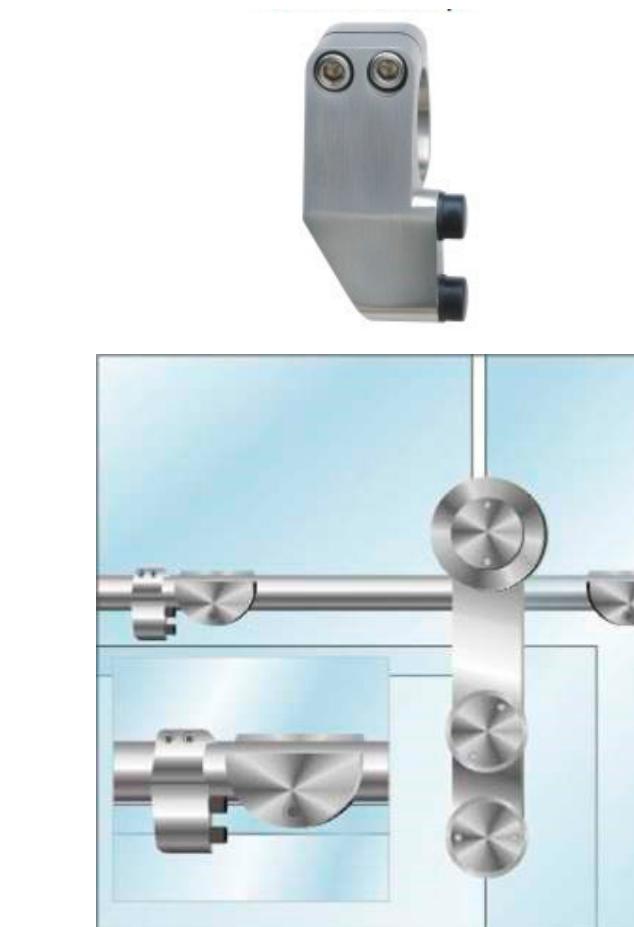

ESA-5R Right Door Stopper

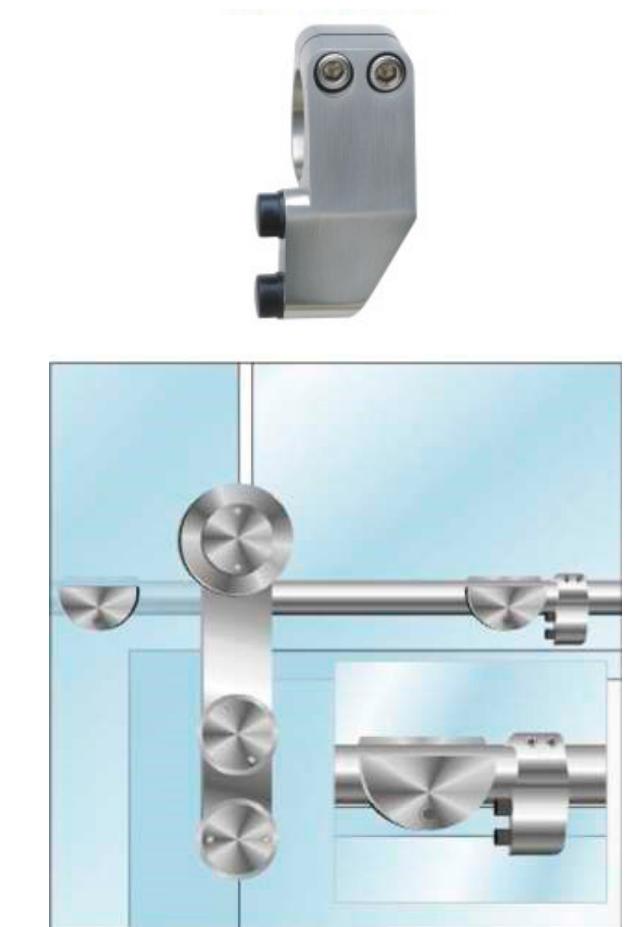

ESA-6 Bottom Floor Guide



ESA-7F Tube to Wall Connector



EAA-022 End caps



TB-001 Header Tube



Spanner Wrench



RKS-1 Designer Finger Pull



SGS IMPERIAL SERIES SHOWER HINGES

Wall Mount Hinges

IMP-110



IMP-110-HP



IMP-110-OS



IMP-110-SB



- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

Finishes Available




Chrome



Brushed Nickel



Oil Rubbed Bronze

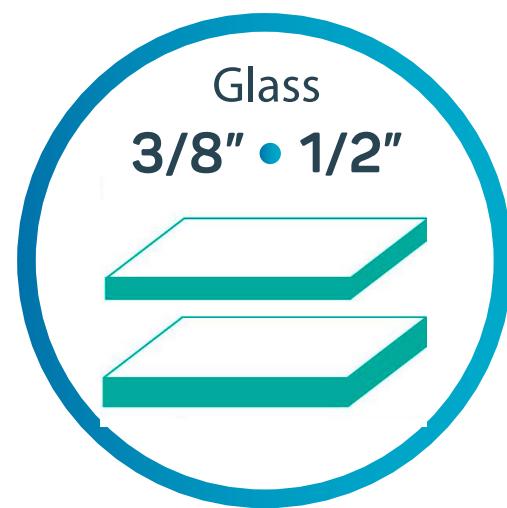

SGS IMPERIAL SERIES SHOWER HINGES

Wall Mount Hinges/Glass to Glass

IMP-1105



IMP-1805



IMP-180



IMP-135



IMP-090



- 5° Preset pin
- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



SGS ROYAL SERIES SHOWER HINGES

Wall Mount Hinges/Glass to Glass

ROY-110-HP



ROY-110-OS



ROY-180



ROY-135



ROY-090



- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



SUP-112



SUP-112-HP



SUP-110



SUP-180



SUP-112-OS



- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



Wall Mount H-Back Plate



SUPB-112-HP

SUPB-112-HP-AJ



NEW

Glass to Glass

SUPB-180



- Beveled edge
- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



ADJUSTABLE SERIES HEAVY DUTY SHOWER HINGES

HEAVY DUTY

SUP-112-AJ

Full Back Plate



SUP-135-AJ

135° Glass to Glass



SUP-180-AJ

180° Glass to Glass



SUP-360-AJ

Pivot Hinge



- Solid forged brass
- Dual precision wound stainless steel springs
- Gripper gaskets
- 3/8"-1/2" thick glass

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



■ NEW REVERSIBLE WALL MOUNT PIVOTS

New wall mounted pivot hinge with reversible L- bracket allows you to mount the same hinge on either side of your enclosure.



LRG-360-RV



LRG-360

Finishes Available




Chrome




Brushed Nickel



Oil Rubbed Bronze

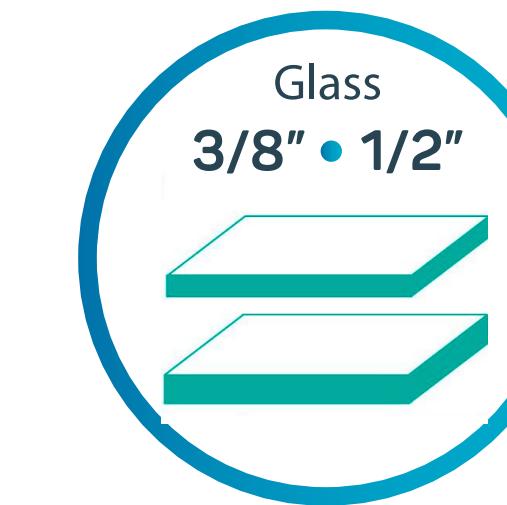

Glass
3/8" • 1/2"



ROUND & SQUARE SUPPORT BARS AND CONNECTORS

RD-KF-023



- Swiveling U-Bracket for 1/4" to 3/8" glass
- Provides fixed panel support for enclosures not going to the ceiling
- No hole drilling required in glass

RD-KA-30S




Wall to tube connector

RD-TB-001-Support



- Round support bar
- 78-3/4" Length brass tubing
- Provides fixed panel support for enclosures not going to the ceiling

SQ-ST-001-Support

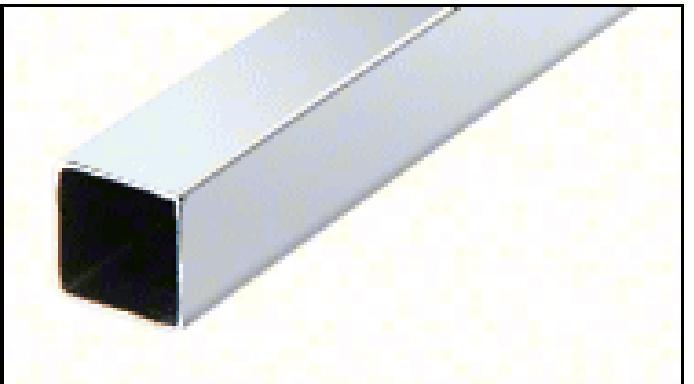

- Square support bar
- 78-3/4" Length brass tubing
- Provides fixed panel support for enclosures not going to the ceiling

SQ-MA-10S



- Swiveling U-Bracket for 3/8" to 1/2" (10 to 12 mm) glass
- Square bar
- Square Tubing matches geometry of many popular sgs hinges
- Provides fixed panel support for enclosures not going to the ceiling
- No hole drilling required in glass

SQ-MA-20S



Wall to tube connector

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze

NO FABRICATION GLASS CLAMPS

GCN-1



GCN-3



GCN-4



GCN-2



- For 1/4" to 1/2" (6 to 12 mm) thick glass
- No glass fabrication required
- Available several styles and finishes
- Use monolithic tempered glass

- Only for 3/8" (10 mm) thick glass
- No glass fabrication required
- Available several styles and finishes
- Use monolithic tempered glass

SGS Sleeve Over Glass Clamps can be used to secure a shelf for lightweight articles. Clamps should be secured to wall with screws in studs, or with Molly-type anchors. Nylon tip brass set screws secure the glass.

Clamps will hold glass, with no glass fabrication required. Maximum 5" (127 mm) glass protrusion from wall is recommended.

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze

NO FABRICATION GLASS CLAMPS

SLE-90AJ Adjustable



- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Use monolithic tempered glass
- Adjustable from 90 to 180 degrees
- Solid brass
- Assists with shear forces
- Holds glass panels in position while sealant cures

SLE-90



- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Use monolithic tempered glass
- solid brass
- Assists with shear forces
- Holds glass panels in position while sealant cures

SGS Sleeve Over Glass Clamps are designed to provide a mechanical fastener to cover the shear forces placed on the glass panels. No special fabrication of the glass is required. Can also be used to secure the glass panels in position while the applied silicone sealant in the joint cures (the silicone sealant glues the glass panels together, prevents water leakage, and provides the pull strength to keep the panels from separating). Clamps are secured in place by nylon tipped allen set screws.

Finishes Available



Chrome




Brushed Nickel



Oil Rubbed Bronze



Covert soft close sliding system

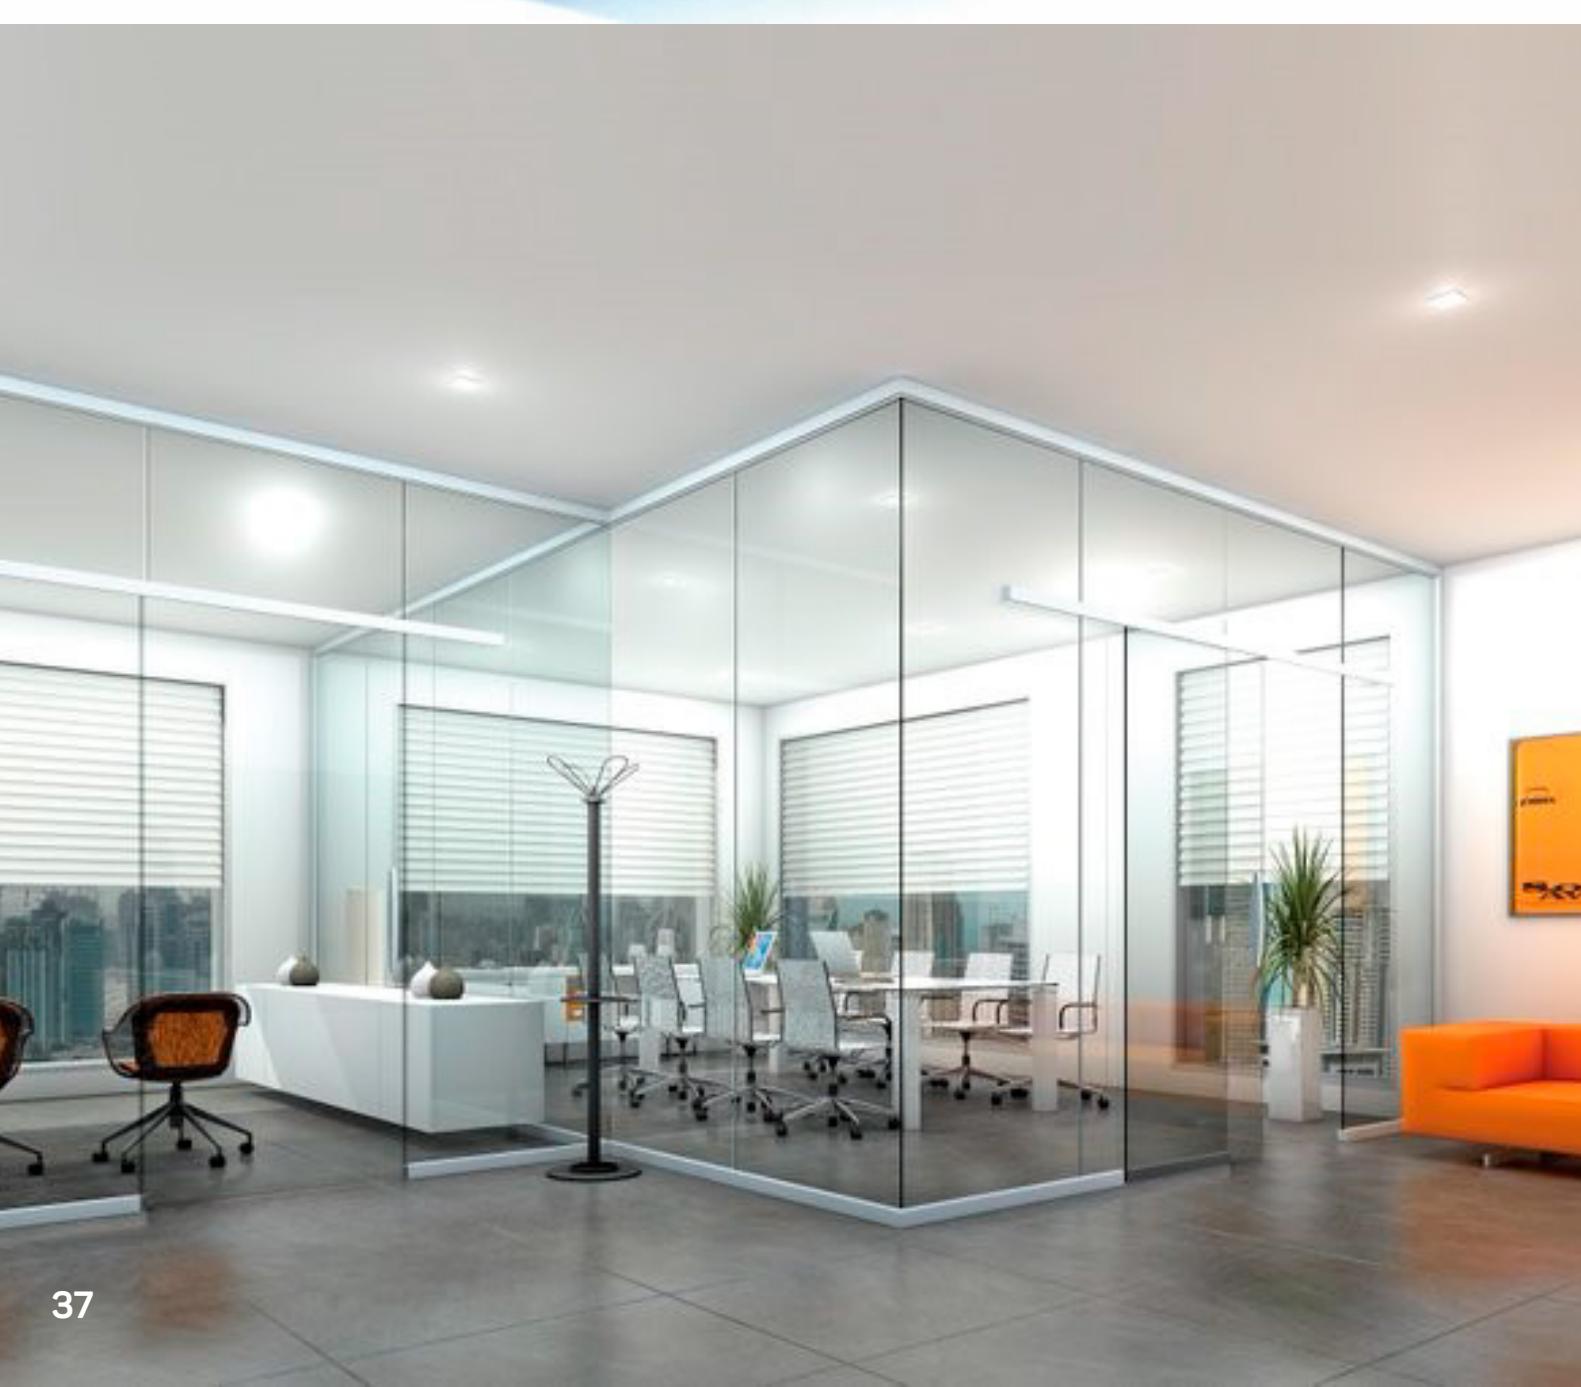

NO FABRICATION GLASS CLAMPS

NEW

SLE-90LW



Left Side Mount

SLE-135



For 135° Neo Angles

SLE-90RW



Right Side Mount

- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Use monolithic tempered glass
- Solid brass
- Assists with shear forces
- Holds glass panels in position while sealant cures

SGS Sleeve Over Glass Clamps are designed to provide a mechanical fastener to cover the shear forces placed on the glass panels. No special fabrication of the glass is required. Can also be used to secure the glass panels in position while the applied silicone sealant in the joint cures (the silicone sealant glues the glass panels together, prevents water leakage, and provides the pull strength to keep the panels from separating). Clamps are secured in place by nylon tipped allen set screws.

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



SGS DESIGNER GLASS CLAMPS

GCR-110



GCR-901



GCR-902



GCR-135



- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Clip size 1 3/4" x 1 3/4"
- Used to secure fixed panels of glass for Frameless shower enclosures
- Solid brass

A nice option to more Traditional U-channel, in that the clamps help the appearance of an 'All-Glass' look glass fabrication required to accommodate clamps use monolithic tempered glass.

Finishes Available




Chrome



Brushed Nickel



Oil Rubbed Bronze

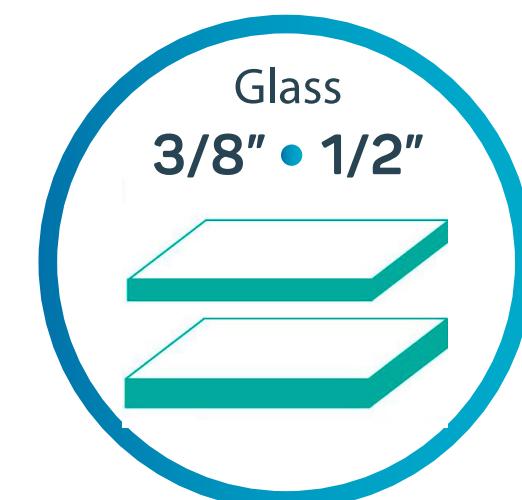

DESIGNER GLASS CLAMPS

GCS-110



GCS-901



GCS-902



GCS-135



GCB-110
Heavy Duty



Clip Size 1 3/4" x 1 3/4"

Clip Size 2" x 2"
Heavy Duty Beveled Edge

- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Used to secure fixed panels of glass for frameless shower enclosures
- Solid brass

A nice option to more traditional U-channel, in that the clamps help the appearance of an 'All-glass' look glass fabrication required to accommodate clamps use monolithic tempered glass.

Finishes Available




Chrome



Brushed Nickel



Oil Rubbed Bronze

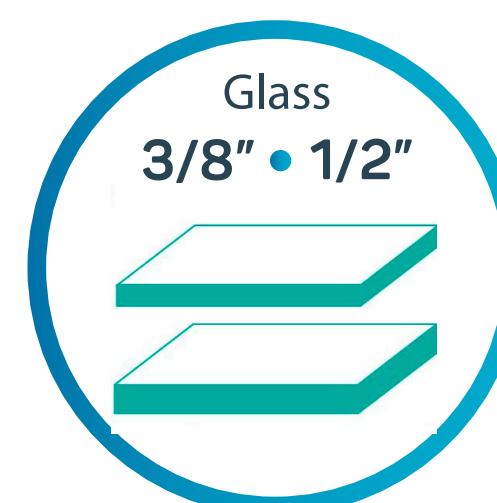



DESIGNER GLASS HEAVY DUTY CLAMPS

HEAVY DUTY

GCS-200
Heavy Duty




GCS200-902



GCS200-135



GCS200-180

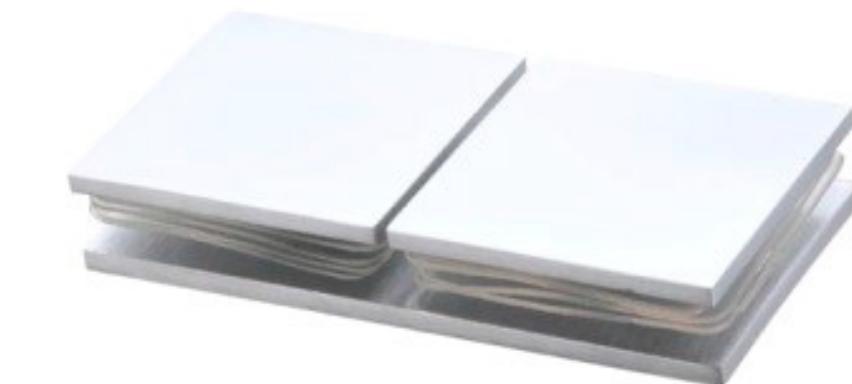

- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Clip size 2" x 2" heavy duty square edge
- Used to secure fixed panels of glass for frameless shower enclosures
- Solid brass

A nice option to more traditional U-channel, in that the clamps help the appearance of an 'All-Glass' look glass fabrication required to accommodate clamps use monolithic tempered glass.

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze



HINGE SIZE DESIGNER GLASS HEAVY DUTY CLAMPS

HEAVY DUTY



GCS-300



GCB-300



- For 5/16" to 1/2" (8 to 12 mm) thick glass
- Heavy duty hinge size clamp
- Used to secure fixed panels of glass for frameless shower enclosures
- Solid brass

A nice option to more traditional U-channel, in that the clamps help the appearance of an 'All-glass' look glass fabrication required to accommodate clamps use monolithic tempered glass.

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze

DESIGNER SHOWER DOOR HANDLES



NEW

CAT NO.	Center to Center Hole Spacing	Overall handle length
SDH-206HL	6" (152mm)	10" (254mm)
SDH-208HL	8" (203mm)	12" (305mm)
SDH-012HL	12" (304.8mm)	19.5" (500mm)
SDH-018HL	18" (457mm)	30" (762mm)
SDH-024HL	24" (610mm)	36" (914.4mm)

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze

**12" Center to center
square and ladder
handles in STOCK!**



NEW

CAT NO.	Center to Center Hole Spacing
SDQ-600	6" (152mm)
SDQ-800	8" (203mm)
SDQ-012	12" (304.8mm)
SDQ-018	18" (457mm)
SDQ-024	24" (610mm)



CAT NO.	Center to Center Hole Spacing
SDH-206	6" (152mm)
SDH-208	8" (203mm)

SGS SHOWER DOOR KNOBS

RKS-1



GDK-02



GDK-09



MC-001



GDK-01



GDK-45



Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze




SHOWER DOOR HEADERS - U-CHANNEL - CONNECTORS




SG-100
95"- 98" Shower Door Headers

ALU10

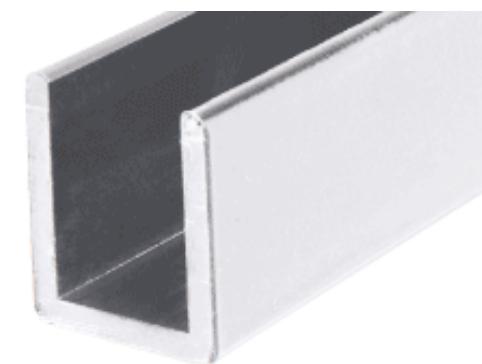

3/8" (10mm) U-Channel

ALU12

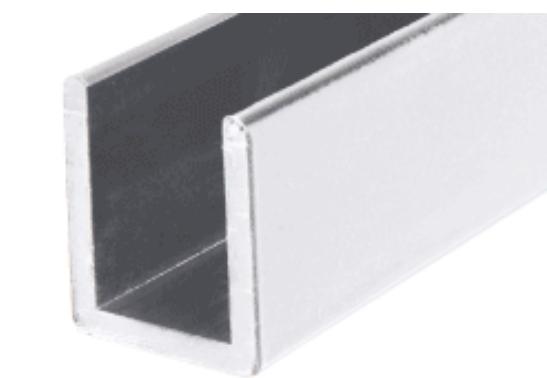

1/2" (12mm) U-Channel




SG-101
Header Filler
Length up to 60".
Please specify size
when ordering.



SG-S04
Header Adapter Block



SG-S06
Wall Mounting
Brackets

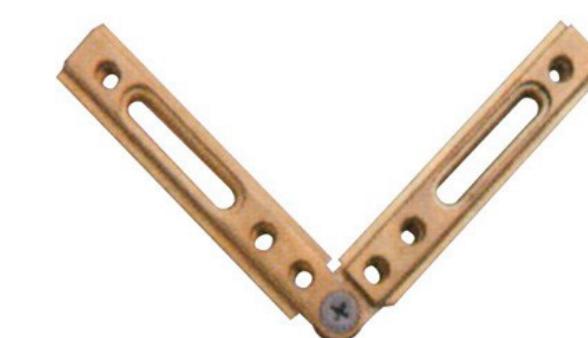

SG-S360
Adjustable Header
Connector

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze

FRAMELESS SHOWER DOOR HALF-ROUND THRESHOLD

These shower door thresholds are mounted directly below the shower door to let the water drain back into the shower stall. Ideal for flat or out-sloping curbs. The tapered style sill leaves a minimal sightline from the exterior of the shower.

NEW

Finishes Available



Chrome



Brushed Nickel



Oil Rubbed Bronze

SGS-Threshold



SHOWER DOOR SEALS, WIPES AND STRIKES




PART# PVC-60T




PART# PVC-70SLD-3/8

SGS Clear Plastic L-Seal adheres to the glass or wall. Simply peel back the pre-applied tape lining and install. Soft bumper on seal provides quiet door closure.

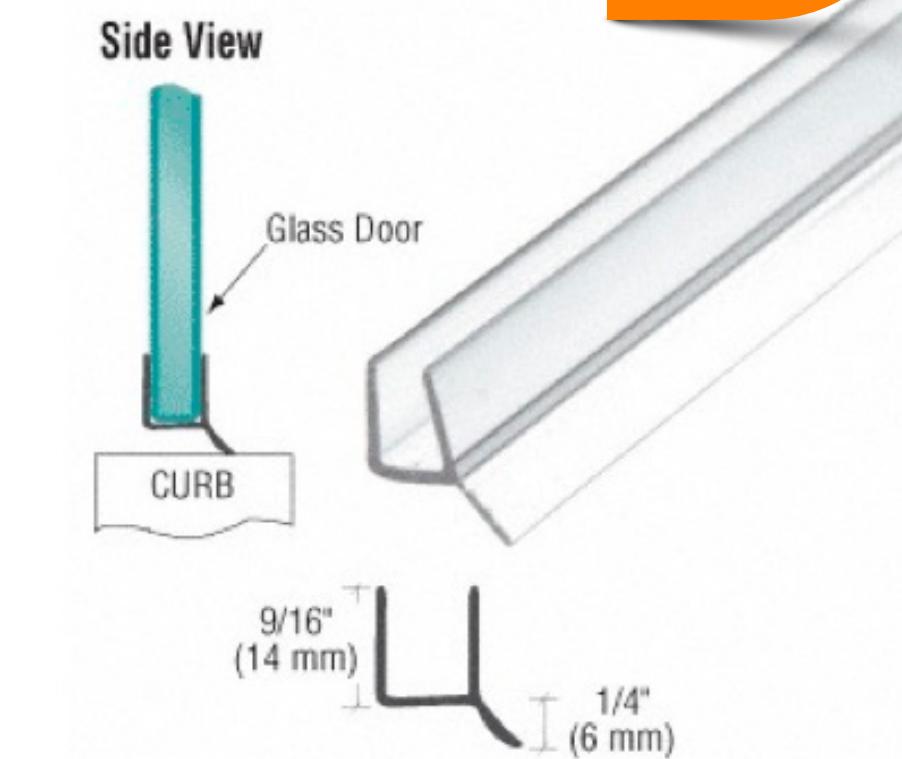

PART# PVC-14SL-3/8

Versatile seal can be used as bottom sweep, it can be used vertically behind the hinged doors to help prevent water leakage, and it can also be used for 135° neo angle showers.

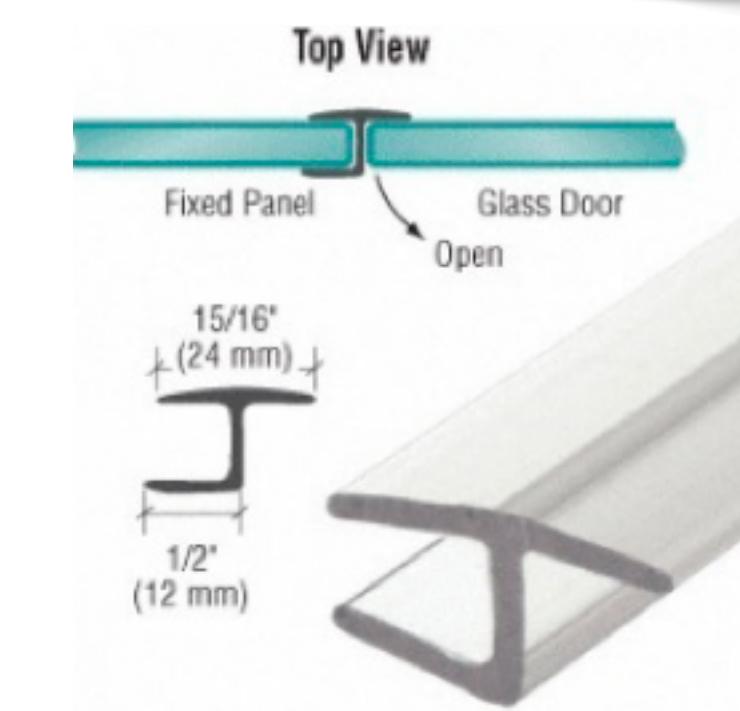

PVC-26-1/2

**SGS Polycarbonate soft Leg H-Jamb
180-degree for 1/2" Glass**

This SGS 'Y' jamb seal strike jamb with firm/soft leg is for use on 180-degree inline glass-to-glass applications. Snaps onto the fixed panel with the lip on the strike side.

The 'u' portion is rigid, and the single leg is firm/soft to cushion the closing and does not allow door to swing in. Snaps onto fixed panel in line with the door.


SHOWER DOOR SEALS, WIPES AND STRIKES

PS-13-381




NEW

PVC-07-3/8

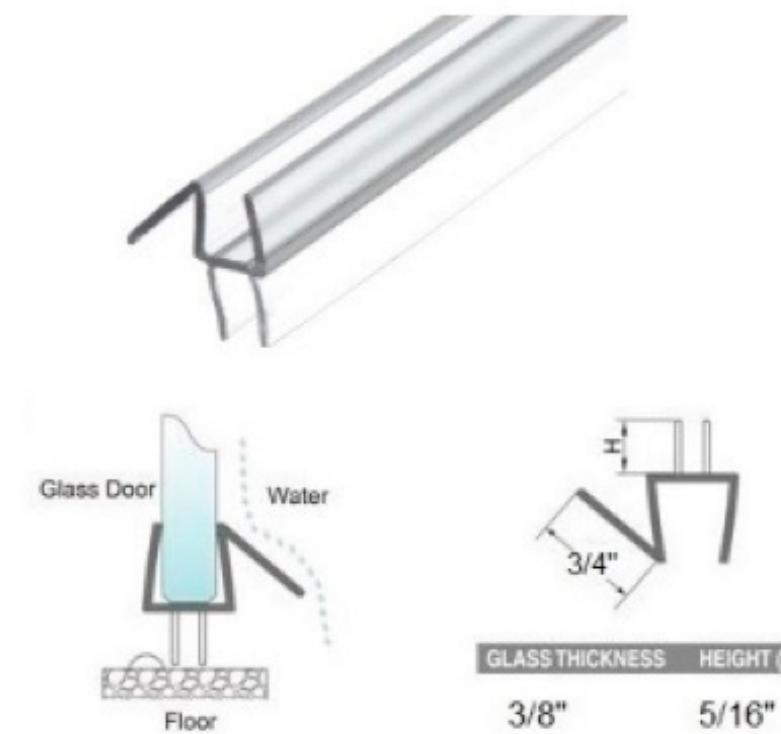

PVC-07-1/2

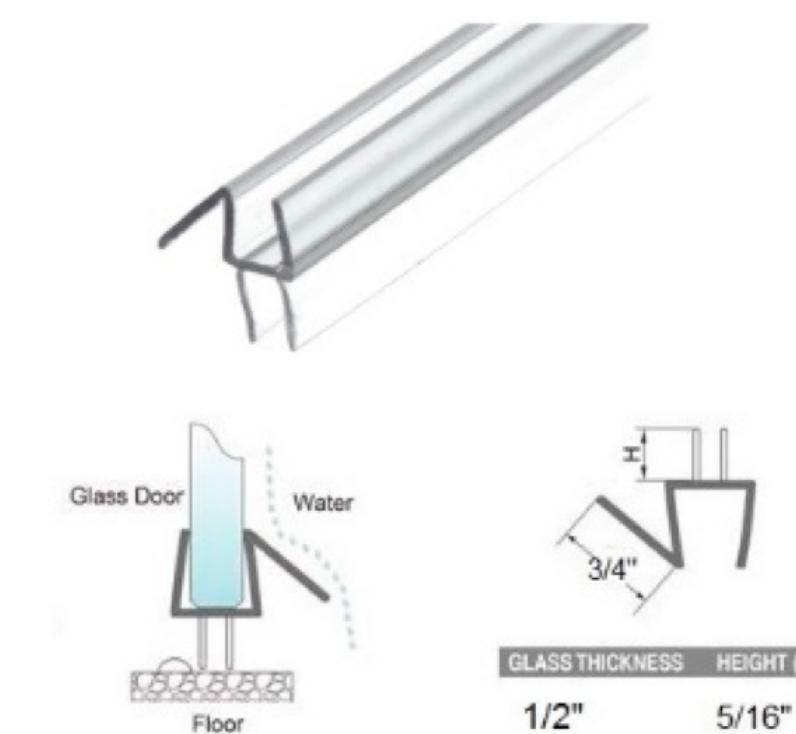

Quatro Sliding System Seal

SGS 3/8" Polycarbonate U with 90-degree Vinyl Fin seal

SGS Polycarbonate 'U' with 90-degree Vinyl Fin seals multiple uses include applying to the sliding door or fixed panel of a Quatro Sliding System, or as a 90-degree seal for a fixed panel meeting a door at 90-degree.

SGS Clear Co-Extruded Bottom Wipe with drip rail for 3/8" Glass


The SGS Clear Bottom Wipe with drip rail snaps onto bottom of door. The soft wipes on bottom create a water-resistant seal. 45-degree drip rail sheds water back into the shower.

SGS Clear Co-Extruded Bottom Wipe with drip rail for 1/2" Glass

The SGS Clear Bottom Wipe with drip rail for 1/2" thick glass snaps onto bottom of door. The soft wipes on bottom create a water-resistant seal. 45-degree drip rail sheds water back into the shower.

SHOWER DOOR SEALS, WIPES AND STRIKES


PVC-26-3/8

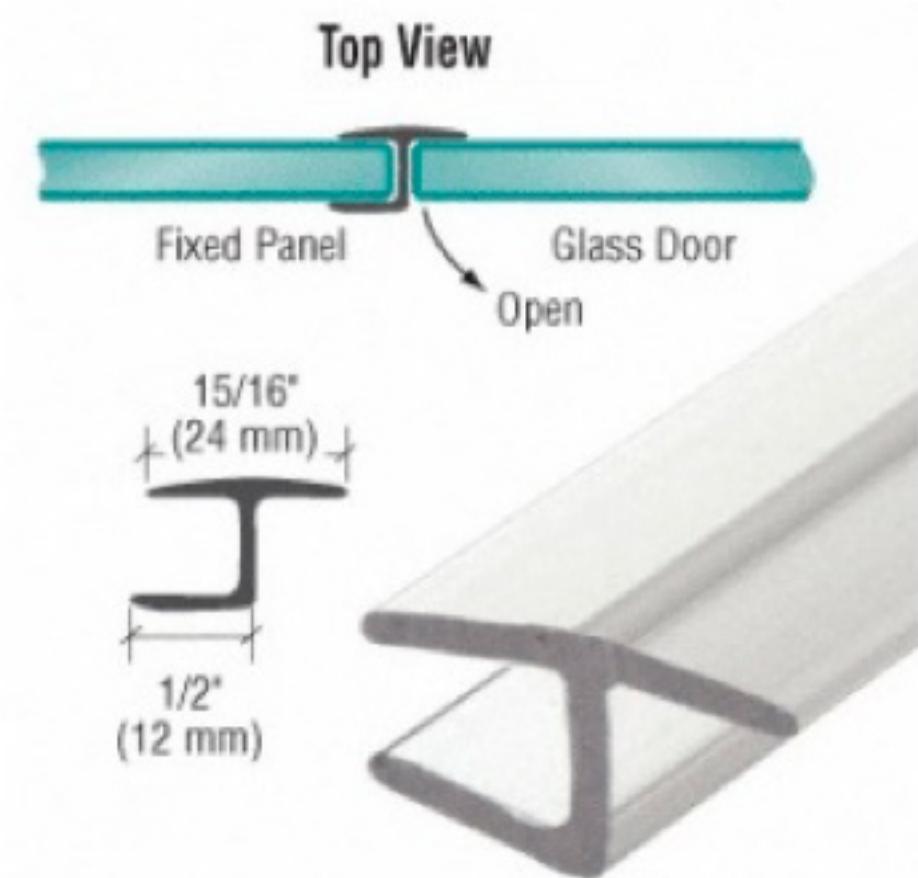

**SGS Polycarbonate H-Jamb Soft Leg
180-degree for 3/8" Glass**

This SGS 'Y' jamb seal strike jamb with firm/soft leg is for use on 180-degree inline glass-to-glass applications. Snaps onto the fixed panel with the lip on the strike side. The 'u' portion is rigid, and the single leg is firm/soft to cushion the closing and does not allow door to swing in. Snaps onto fixed panel in line with the door.


PVC-24

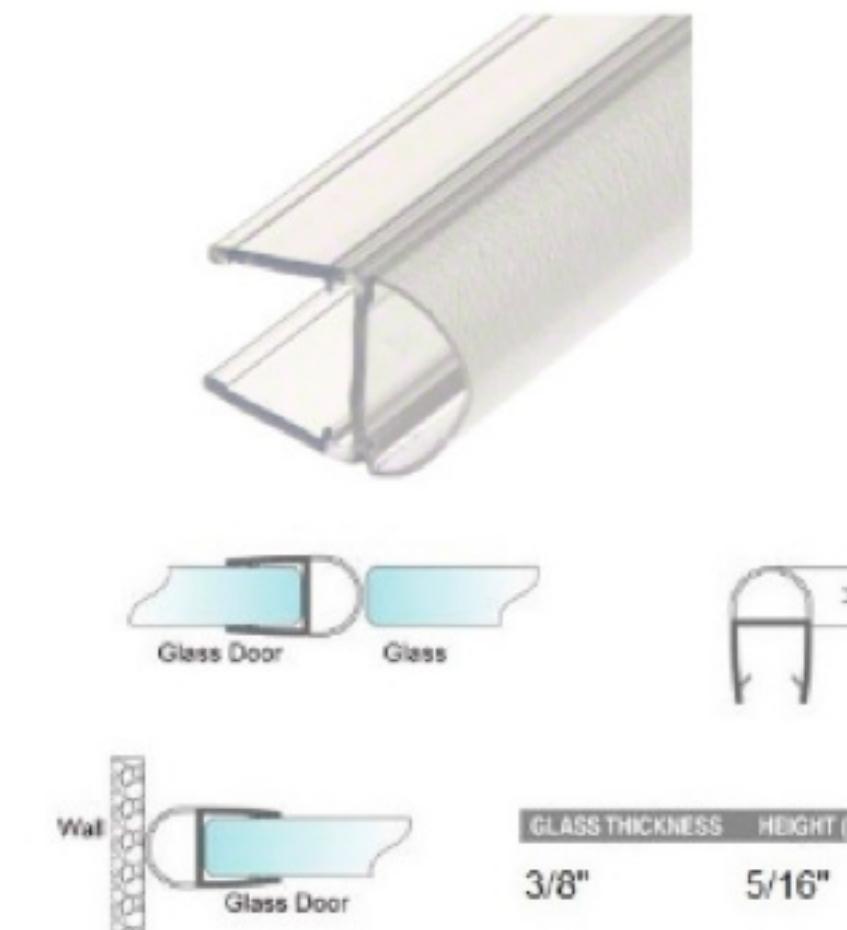

**SGS Translucent Vinyl Bulb
Seal for 3/8 Glass**

The SGS Clear Polycarbonate 'U' with bulb attachment is a versatile seal that can be mounted to the edge of a door or panel for a variety of installation configurations. The soft bulb portion of the seal allows doors to swing both in and out of the enclosure if desired.

PVC-24-1/2

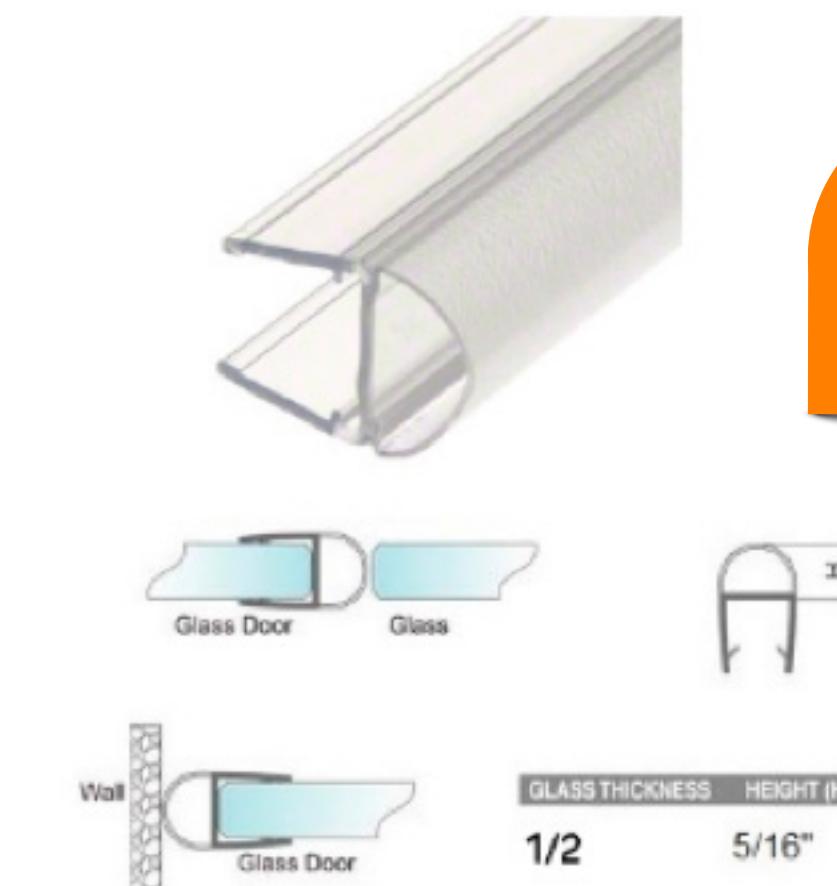


**SGS Translucent Vinyl Bulb
Seal for 1/2" thick Glass**


The SGS Clear Polycarbonate 'U' with bulb attachment for 1/2 thick glass is a versatile seal that can be mounted to the edge of a door or panel for a variety of installation configurations. The soft bulb portion of the seal allows doors to swing both in and out of the enclosure if desired.

SHOWER DOOR SEALS, WIPES AND STRIKES

PVC-50

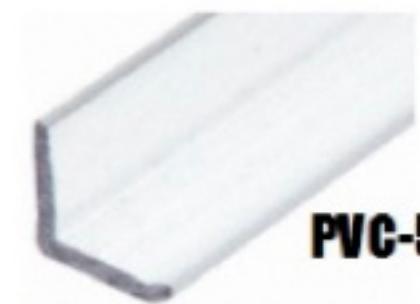


For 1/4" to 1/2" Thick Glass

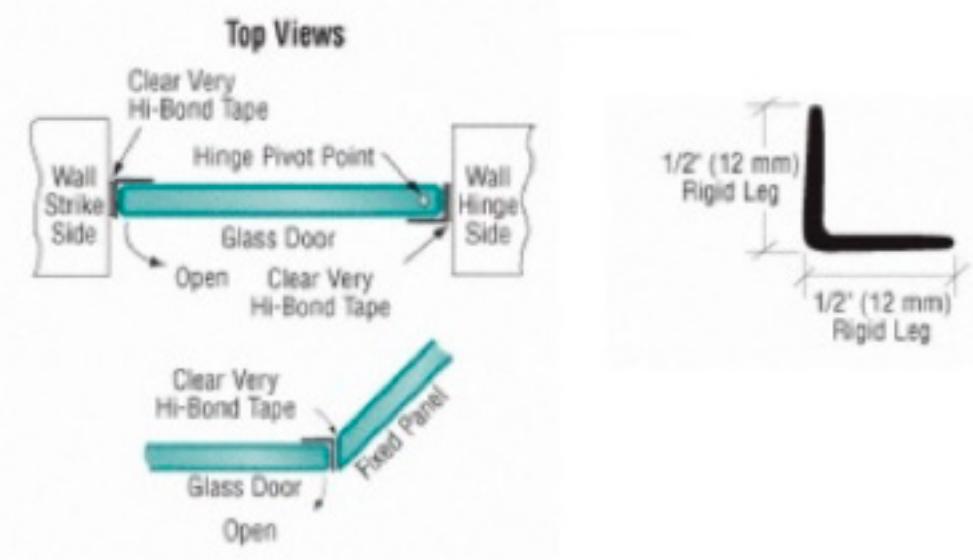

This SGS Clear 'L' Angle Jamb is used for both hinge and strike jambs. It can be adhered to the wall or a fixed panel using clear very hi-bond tape. It is commonly used as a jamb for neo-angle installations when a clean look is most desired.



PS-13

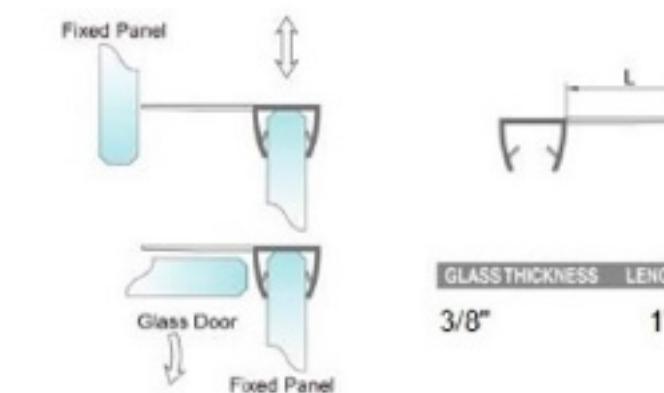

SGS 3/8" Polycarbonate U with 90-Degree Vinyl Finseal

SGS Polycarbonate 'U' with 90-degree vinyl fin seals multiple uses include applying to the sliding door or fixed panel of a streamline sliding door system, or as a 90-degree seal for a fixed panel meeting a at 90-degree.

PVC-04

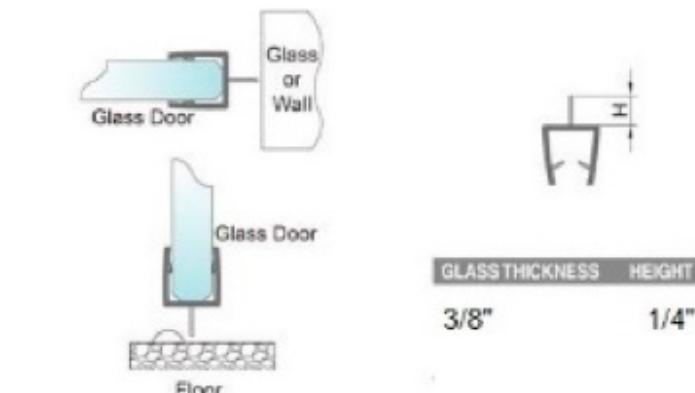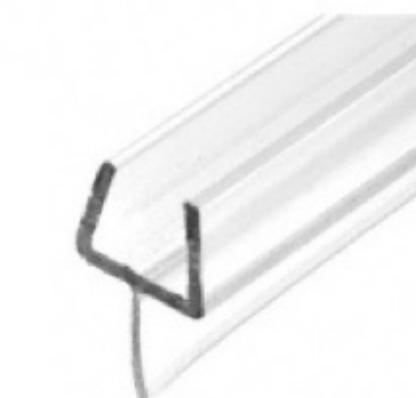

SGS One-Piece Bottom Rail With Clear Wipe for 3/8" Glass

This SGS One-Piece Bottom Rail is snapped on the bottom of the door to achieve a seal, because it is a single-piece sweep, it means the vinyl seal that hangs down from the sweep will firmly direct the water back into the shower enclosure.

SGS GLASS T-CUTTERS



Sizes Available:

- 23-5/8"
- 35-7/16"
- 47-1/4"
- 59-1/16"
- 70-7/8"
- 82-11/16"

SGS Production Oil T-Cutter is the ideal strip cutting tool for any size glass, window or framing shop. Whether splitting sheets for more economical storage, or making repetitive cuts of the same dimension, SGS Production Oil T-Cutter is state-of-the-art in manual strip cutting technology. A large capacity oil reservoir automatically delivers exact amounts of cutting oil to the precision ground carbide cutting wheel ensuring low maintenance and long service life. The easy to read scale makes changing dimensions fast, easy, and accurate. This SGS T-Cutter rides along the edge of the glass guided by rollers to provide a perfect cut parallel to the edge guide.

■ SGS GLASS SUCTION CUP LIFTERS

SGS-2CUP-Suction-Lifter



- 2-Cup Powerful Suction Lifter
- Max Carrying Capacity=396lbs (180kg)
- Cup Diameter- 5" (127mm)

SGS-3CUP-Suction-Lifter



- 3-Cup Powerful Suction Lifter
- Max Carrying Capacity=462lbs (210kg)
- Cup Diameter- 5" (127mm)

SGS suction lifter. The textured, powder coated, heavy duty aluminum handle provides excellent grip. This lifter has two and three 5" rubber suction cups. Pushing the tabs on the individual pads down creates the suction on the surface. Designed for use on non-porous surfaces.



**Structure
Glass
Solutions**

Thank you for the opportunity to serve you. Structure Glass Solutions is a premier manufacturer/supplier of frameless shower door hardware, sliding systems, and glass machinery for residential and commercial markets. We have a full line of stylish products in a variety of finishes.

Structure Glass Solutions has a well established track record and our products have always been met with great customer satisfaction. Excellent customer service, quality and value are our most important goals.

We are constantly looking to add new products to our line of hardware. If you have any suggestions or didn't see something you use, please let us know.

We strongly believe that Structure Glass Solutions will become a preferred vendor for your company.

Call us for further assistance: **954-499-9450**
www.structureglassolutions.com



Structure Glass Solutions
12086 Miramar Parkway Miramar, FL 33025
Phone- 954-499-9450
Fax- 954-447-0515
email: sales@structuregs.com

