




Connection Diagram:

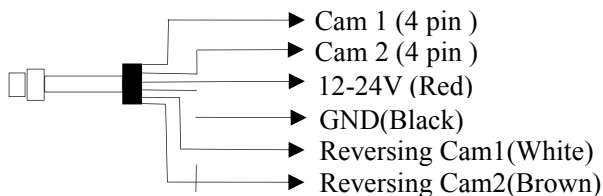

Button Menu

- | | |
|------------------|--------------|
| 1. Dimmer | 6. Menu |
| 2. Camera | 7. Down |
| 3. Mirror/Normal | 8. Up |
| 4. Day/Night | 9. IR Remote |
| 5. Power | |

Monitor Specification:

- . Screen size: 5 inch new TFT panel
- . Aspect Ratio: 16:9 image
- . Input: 2-way video input with 2 reversing cable
- . System: PAL and NTSC auto switching
- . Resolution: 800 x R.G.B x480
- . Brightness: 350cd/m2
- . Power supply: 12-24V DC
- . Built-in speaker
- . Operation Temperature: -20°C~+70°C.RH95% Max
- . Storage Temperature: -30°C~+80°C.RH95% Max

Cable Specification:

- . 4P lock connector cable

Accessories:

- . 1pc Heat-shrink tube for camera connector

Camera Specification:

- . Image Sensor : 1/3" CCD
- . TV System: NTSC/PAL
- . IP Rating: IP 68
- . Vibration Rate: 10G
- . Night Vision function: available
- . Audio function: available
- . Effective Pixels: N: 510(H)×492(H) pixels
P: 500(H)×582(V) pixels
- . Horizontal Resolution: 700 TV Line
- . Video Output: 1.0vp-p, 75Ohm,
- . Minimum Illumination: 0.1LUX/F1.2
- . Built-in Lens: f: 2.8mm
- . Power Consumption: DC 12V (+/-10%)
- . Lens Angle (Deg.): 120°
- . Operation Temperature: -20°C~+70°C.RH95% Max
- . Storage Temperature: -30°C~+80°C.RH95% Max