



MOVIN' ON GPS

FLEET MANAGEMENT

MOSS-AHD-RVS-5002

Commercial Vehicle Backup Camera System



Monitor Specifications

Model Number: MOSS-AHD-M5002

System: PAL / NTSC system

Video: 2 AHD 4 pin connector inputs

Brightness: 300 cd/m²

View angle: L/R: 70, UP: 50, down: 70 degree

Trigger: Trigger function for V2 on reversing

Power supply: DC 9~32 V

Dimension: 20.4 x 14.1 x 7.8cm

Storage Temp: -22°C- +80°C

Panel Resolution: 5" high digital 16:9 image

Video input: 800 x 480 RGB

Contrast: 720P, 25/30fps, PAL/NTSC, 400 : 1

Language: 2 languages OSD, remote control

Optional: Built-in speaker

Dimension: 18.5 x 12.8 x 3.0cm

Operating Temp: -20°C- +75°C

Weight: 7kg

Camera Specifications

Model Number: MOSS-AHD-RVC16

Images Sensors: 1/4"

Power supply: DC 12V ±1

Video input format: 720P 25/30FPS PAL/NTSC

Mirror image & non-mirrored optional

Lux: 0.01 LUX (24 LED)

Lens: 2.8mm

IR cut Day and Night switch

Viewing Angle: 120°

IP Rating: IP67-IP68

Operating Temp (Deg.C): -20~+75 (RH 95% Max.)

Storage Temp (Deg.C): -30°C- +80°C


Cable Specification

4P lock connector cable

Accessories

1pc Heat-shrink tube for camera connector

Installation & Setup

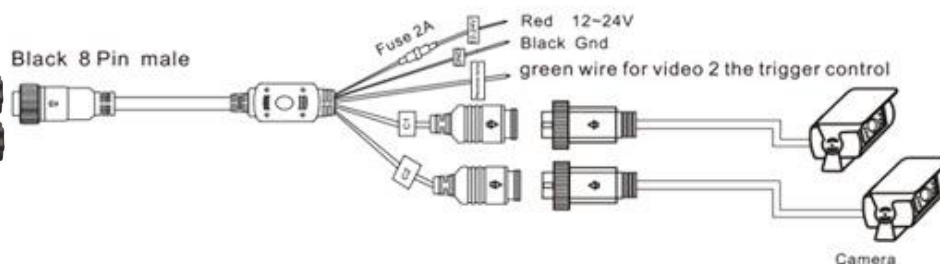

G.P.S TRACKING, FLEET MANAGEMENT & MOBILE SURVEILLANCE SYSTEMS

636 Hempstead Turnpike, Franklin Square, NY 11010 P: 516.489.2350 F: 516.489.8430 www.movinongps.com