

RISE 20" (51cm) 18" (46cm) 16" (41cm)

14" (36cm) 12" (30cm)


10" (25cm) 9" (23cm) 8" (20cm) 7" (18cm) 6" (15cm) 5" (13cm)

4" (10cm)


- 1. Lifting weight does not include accessories or certain upgraded seating. Please contact Customer Service for greater detail.
- 2. Vehicle dependent.
- 3. Requires vehicle modification.
- 4. Does not include any accessories or hardware.
- 5. Hitch weight carrying capacity varies by vehicle.
 - 6. Weight capacity reduced to 190 lbs. max.
 - 7. Class III and IV only.
 - 8. Standard Class IV receiver only.

Rubber Threshold Ramps Specifications

RISE	TOTAL LENGTH	USABLE WIDTH	OVERALL WIDTH	WEIGHT OF EACH PC.
1"	6.9"	36"	39"	9.5 lbs.
1.5"	6.9"	36"	41"	12 lbs.
2"	6.9"	36"	42.5"	15.5 lbs.
2.5"	7.5"	36"	44.2"	18 lbs.
3"	7.96"	36"	46"	23 lbs.
3.5"	7.96"	36"	46"	28.81 lbs.
4"	7.96"	36"	46"	37.4 lbs.

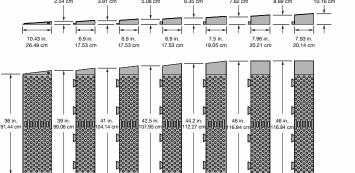

1 in.	1.5 in.	2 in.	2.5 in.	3 in.	3.5 in.	4 in.
2.54 cm	3.81 cm	5.08 cm	6.35 cm	7.62 cm	8.89 cm	10.16 cm
						-
├	→I ↑ 1←	→I † ←	→I ↑ I+	→l † l-	→	→ I †







LIFTS & RAMPS GUIDE

Portable Ramps Chart

Portable Ramps Chart					16.1° (29%)
					14.5° (26%)
				15.5° (28%)	12.8° (23%)
° = degree of slope			17° (30%)	13.5° (24%)	11.2° (20%)
% = percent grade			14.5° (26%)	11.5° (20%)	9.6° (17%)
		16.1° (29%)	12° (21%)	9.6° (17%)	8° (14%)
		14.5° (26%)	10.8° (19%)	8.6° (15%)	7.2° (13%)
		12.8° (23%)	9.6° (17%)	7.7° (13%)	6.4° (11%)
	17° (30%)	11.2° (20%)	8.4° (15%)	6.7° (12%)	5.6° (10%)
	14.5° (26%)	9.6° (17%)	7.2° (13%)	5.7° (10%)	4.8° (8%)
	12° (21%)	8° (14%)	6° (10%)	4.8° (8%)	4° (7%)
	9.6° (17%)	6.4° (11%)	4.8° (8%)	3.8° (7%)	3.2° (6%)

The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed & range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product impro length, width, turning radius and ground clearance can be subject to variance of + or - 3 %.



The Rubber Threshold

Ramp has a maximum incline of 4° (7%), which meets the requiremen established by the ADA









Interior Lifts





Outlander LP



Outlander







Rubber Threshold Ramp



Single-Fold Ramps

