

MINI ROCK CANDY CYLINDER PENDANT

PRODUCT FEATURES

- Composed of unique crystal Frit glass
- Hand-blown transparent glass
- Offered in two modern glass finishes, Smoke and Clear
- Ideal for bedroom lighting, bathroom vanity lighting and kitchen island task lighting
- Lamp ships in the box saving you time and money
- Protected by a 1-year warranty

LAMPING

Includes (1) 50 watt low voltage GY6.35 base Xenon bi-pin lamp and 6' of field-cutttable suspension cable. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).



Clear



Clear



Smoke

ORDERING INFORMATION

700	SYSTEM	RCK	COLOR	FINISH	LAMP
	FJ FREEJACK		C CLEAR	Z ANTIQUE BRONZE	12 VOLT XENON
	MP MONOPOINT		K SMOKE	S SATIN NICKEL	-24 24 VOLT HALOGEN
	MO MONORAIL				

MP mount includes 4" Round Flush Canopy.

700

RCK

JOB NAME

NOTES

MINI ROCK CANDY CYLINDER PENDANT

SPECIFICATIONS

HARDWARE MATERIAL

SHADE MATERIAL

NET WEIGHT 3.5 lbs

HEIGHT 10.2in

WIDTH 3.6in

LENGTH 3.6in

UP LIGHT / DOWN LIGHT / BOTH?

WET LISTED

DAMP LISTED

DRY LISTED Yes


MIN. HANGING HEIGHT

MAX HANGING HEIGHT

SLOPED CEILING ADAPTABLE?

GENERAL LISTING

INCLUDES

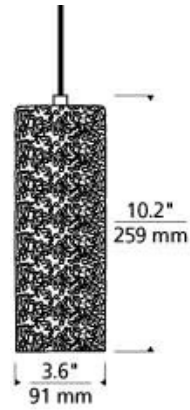

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS			750	
WATTS			50	
MAX WATTAGE PER BULB			50W	
INPUT VOLTAGE			12V 120V	
DIMMING TYPE*			ELV	
CCT			2900K	
CRI			100 CRI	
LED LIFETIME				
L70				
AVERAGE BULB HOURS			10000	
FIELD SERVICEABLE LED				
LAMP BASE			GY 6.5	
LAMP SHAPE			GY 6.5	
LAMP INCLUDED?			Y	
WARRANTY**			1 Year	

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

