



DIRECTIONAL LIGHTS RXD-01 SERIES

RXD-01-BAR
as displayed

SPECIFICATIONS

CONSTRUCTION: Cast brass bullet; matching cast brass adjustable swivel with 240° rotation

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

LAMP SUPPLIED: 20w MR16 FL(BAB) 5000 hours average rating (50w max)

LAMP OPTIONS: We recommend 50,000 hour ARROW 4w LED (-LED) or 40,000 hour 5w (-LED5) or 7w (-LED7) ARROW Super Saver LED

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires


WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Unfinished brass. Optional finishes available



RXD-01-BRS

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXD-01-BRS	Cast Brass Bullet	20w MR16 FL(BAB)	3.0 lbs.


In Acid Rust

LAMP AND STAKE **INSTALLED** TO SAVE YOU TIME AND MONEY

IP65



MOUNTING ACCESSORIES

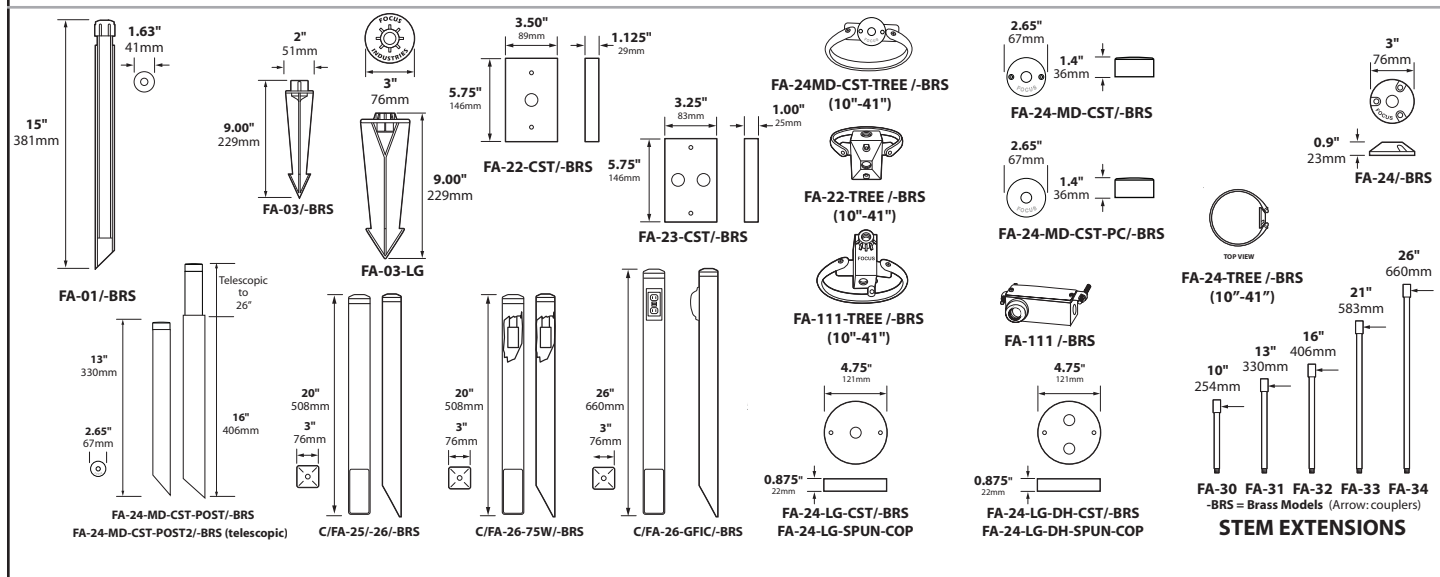

BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/4" Hex Cell Louver
FA-11-SL33-BLUE	Blue Tempered Glass Lens
FA-11-SL33-GREEN	Green Tempered Glass Lens
FA-11-SL33-AMBER	Amber Tempered Glass Lens
FA-11-SL33-RED	Red Tempered Glass Lens
FA-11-BLUE	Light Blue (Moonlight) Tempered Glass Lens
FA-98	Linear Spread Tempered Glass Lens
FA-104-SB	Wide Spread Sandblasted Glass Lens Softener

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.®
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390