

LED COMMERCIAL BRICK LIGHTS

SL-08-LEDP SERIES

SL-08-AL-LEDP-BAR
as displayed

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or brass 3 louver brick light.
Stamped stainless steel surface mounting bracket - no back box required.

-AL MODELS ONLY: Cast aluminum or brass brick light with high impact white acrylic lens. Stamped stainless steel surface mounting bracket - no back box required.

3 LENS OPTIONS:

SL-08-LEDP: Standard white acrylic; creates warm 2700K incandescent like color

SL-08-LEDP-SB: Sand Blast clear acrylic; creates soft 3000K halogen like color

SL-08-LEDP-CL: Clear acrylic; bright halogen 3000K color

GASKET: Black neosponge closed cell; .190" thickness

LIGHT SOURCE: 12v, 8w integrated LED flat panel with external driver, warm white 3000K
630 lumens (3000K) / 680 lumens (5200K)

LIFETIME RATING: 50,000 hours

SOCKET: None

DRIVER: 8w output, 12v AC input. Maximum distance from fixture is 18 feet.

For use with magnetic transformers only

VOLTAGE RANGE: 9 to 18 volts. Optimum operating range of 10 to 15 volts for consistent performance and brightness.

WIRING: Red(+) and Black(-) 18 gauge zip cord from LED panel. Connects to external driver Red(+) and Black(-) 18 gauge zip cord.

Additional 6' 18/2 zip cord supplied for wiring external driver to main cable.

For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from LED driver to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: Stainless Steel surface mount bracket; two screws and wall anchors provided; Face plate attaches to bracket with two provided set screws

FINISH: Aluminum - Black texture polyester powder coat; optional finishes available
Brass - Unfinished; optional finishes available

CAUTION: MUST BE POWERED BY LOW VOLTAGE AC MAGNETIC TRANSFORMER ONLY

**SL-08-LEDP-WBR**

SL-08-AL-LEDP-BAR



ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	SHIP WEIGHT
SL-08-LEDP-BLT	Cast Aluminum 3 Louver Flat Panel LED Brick Light,	1.0 lbs.
SL-08-LEDP-BRS	Cast Brass 3 Louver Flat Panel LED Brick Light,	2.0 lbs.
SL-08-AL-LEDP-BLT	Cast Aluminum Lensed Flat Panel LED Brick Light,	1.0 lbs.
SL-08-AL-LEDP-BRS	Cast Brass Lensed Panel LED Brick Light,	2.0 lbs.

Lenses are all standard white acrylic; creates warm 2700K incandescent like color

Add -SB To Part #: Sand Blast clear acrylic; creates soft 3000K halogen like color

Add -CL To Part #: Clear acrylic; bright halogen 3000K color

Add -52 To Part #: 5200K Cool White Flat Panel LED

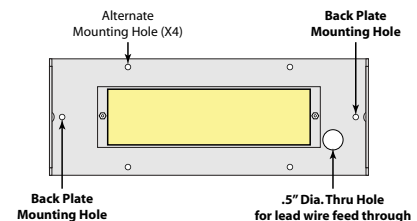

Mounting Bracket w/ LED Panel



IP66

**JOB INFORMATION**

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
80-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT
SL-08-LEDP Cut Sheet 121015													BRASS & COPPER ONLY		