



HAND-DETAILED...

To create the house of your dreams

IF YOU DREAM IT, WE CAN DO IT. We turn dreams into reality with a master artist's respect for time, tradition and detail. Our artists and design teams work closely with each of our customers to create a distinctive look. Using time-honored techniques and the spirit of innovation, our master craftsmen create and refine roof tiles with the desired texture, color and shading. Working together with our technical team, they create a high-performance roof system that rises above the rest for lasting beauty and protection.

OUR COMPREHENSIVE CUSTOMER CARE continues for years beyond the installation of your roof to ensure that your Vande Hey Raleigh roof tile brings years of enduring elegance and peace of mind.

OUR ROOFS HAVE DISTINCTION & DURABILITY. Our smaller roof tile creates a more definitive shadow line, allowing for a more precise fit. This smaller tile and double weather track allows for more expansion and contraction of the individual tiles, which makes it a perfect choice for colder climates.





From design to estimating, we collaborate with architects to develop technically precise drawings and provide contractors with on-site technical assistance.








All production tiles must meet stringent quality control standards. Transverse strength testing, a double-troweled waterlock for improved water flow, plus a Lifetime Tranferable Limited Warranty ensure your peace of mind.

TYPICAL INSTALLATION BASIC STEPS

- 1. Install drip flashing and anti-ponding metal
- 2. Apply ice and water shield along perimeters
- 3. Apply underlayment to roof deck
- 4. Install valley flashings
- 5. Install battens
- 6. Install tile and trim

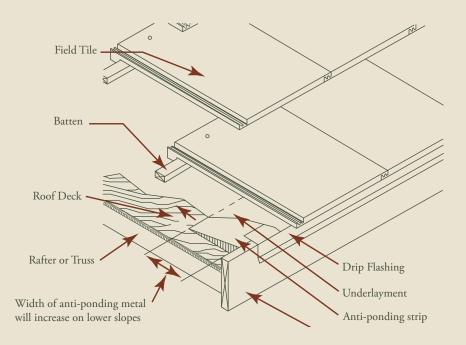


VANDE HEY RALEIGH ROOF TILES, designed for extreme climates, are virtually resistant to the passing of time, the ravages of weather and the hazards of fire. Our roof tile systems withstand wind-driven rain, absorb minimal moisture and defy termites, rodents and rot. Our tile meets or exceeds industry requirements for strength, water absorption, permeability, freeze-thaw, wind uplift, combustibility, dimensions and weight.

Since our roof tiles are designed to perform for years beyond installation, Vande Hey Raleigh roof tiles are covered by a Lifetime Transferable Limited Warranty for enduring beauty and peace of mind.



- Energy Efficient

 Natural ventilation provides
 cool roof benefits
- Environmentally Friendly Manufacturing
 No harmful chemicals are used in the
 manufacturing process

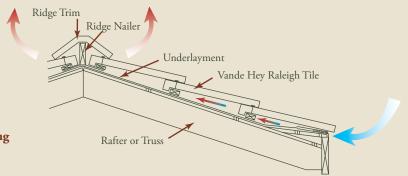



ROOF TILE PHYSICAL PROPERTIES				
Property	Value	Test Method		
Dimensional Tolerances	+/-5%	ASTM C140		
Freeze /Thaw	1.0% max loss of dry weight (50 cycles)	ASTM C67		
Transverse Strength	300 lbs force	ASTM C67		
Permeability Zero	free water on underside in 2 hours	ASTM C1492		
Water Absorption	10.5% max	ASTM C140		
Hail Resistant Impact Test	Class III	FM 4473		
Fire Rating	Class A	ASTM E108		

PRODUCT DATA*			
Style	Riviera	Flat	Spanish
Dimensions	15¾" X 10¼"	15¾" X 10¾"	17¼" X 13"
Tile per square	138	124	86
Exposure per tile	12" X 8 ¹¹ / ₁₆ "	12" X 9¾"	14" X 12"
Approx. lbs/sq.	1,000	1,050	1,000
Aprox. kgs/sq. mtr.	48.8	51.3	47.6
Approx. sqs/pallet	2.6	2.6	2.65
Approx. sqs + trim per truck (46,500 lbs)	38.5	38.0	40.0

- * Miami-Dade County approved, Florida approved NOA 06-0201.01 NOA 07-0525.05
- * ICC ESR-1759



1565 Bohm Drive Little Chute, WI 54140 800-236-8453